(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
6 April 2006 (06.04.2006)

PCT

(10) International Publication Number
WO 2006/035625 A1

(51) International Patent Classification:
H05B 33/04 (2006.01) *H01L 51/50* (2006.01)
H05B 33/02 (2006.01)

(21) International Application Number:
PCT/JP2005/017229

(22) International Filing Date:
13 September 2005 (13.09.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-279872 27 September 2004 (27.09.2004) JP

(71) Applicant *(for all designated States except US)*: **TOSHIBA MATSUSHITA DISPLAY TECHNOLOGY CO., LTD.** [JP/JP]; 1-8, Konan 4-chome, Minato-ku, Tokyo, 1080075 (JP).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **OKUTANI, Satoshi** [JP/JP]. **SANO, Hiroshi** [JP/JP]. **SUNOHARA, Kazuyuki** [JP/JP].

(74) Agents: **SUZUYE, Takehiko** et al.; c/o SUZUYE & SUZUYE, 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 100-0013 (JP).


(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

[Continued on next page]

(54) **Title:** ORGANIC EL DISPLAY

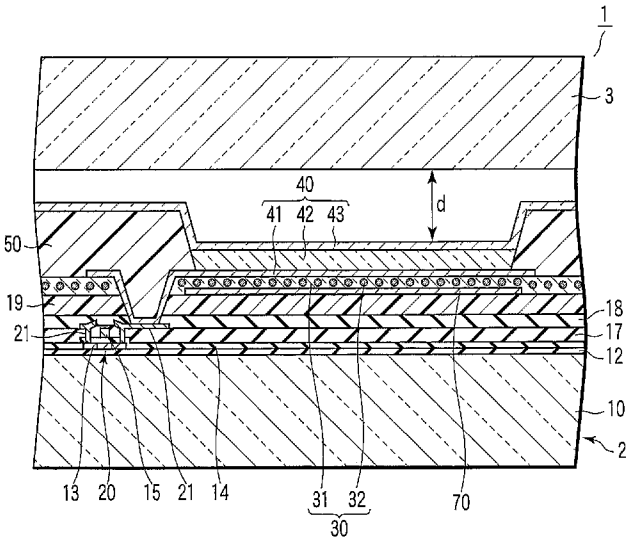

(57) **Abstract:** A top emission organic EL display (1) includes an array substrate (2) including an insulating substrate (10), organic EL elements (40) which are arranged on a main surface of the insulating substrate (10), and an outcoupling layer (30) which extracts light components propagating in in-plane direction while causing multiple-beam interference from the organic EL element (40) to make the light components travel in front of the organic EL element (40), and a sealing substrate (3) facing and spaced apart from the organic EL elements (40). The display (1) forms an enclosed space filled with an inert gas or evacuated between the sealing substrate (3) and an element portion of the array substrate (2) corresponding to the organic EL element (40). A distance between the element portion and the sealing substrate (3) is 100 nm or longer.

WO 2006/035625 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.