

09/11/04
2004065884



162162

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



ACTION


(43) International Publication Date
4 December 2003 (04.12.2003)

PCT

(10) International Publication Number
WO 03/099676 A1

- (51) International Patent Classification⁷: **B65D 71/72**, B65B 59/00, 27/00
- (21) International Application Number: PCT/SE03/00635
- (22) International Filing Date: 22 April 2003 (22.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0201590-7 28 May 2002 (28.05.2002) SE
- (71) Applicant (for all designated States except US): **INTER IKEA SYSTEMS B.V.** [NL/NL]; Olof Palmestraat 1, NL-2616 LN Delft (NL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **DICKNER, Allan** [SE/SE]; Storkstigen 16, S-343 35 Älmhult (SE).
- (74) Agent: **STRÖM & GULLIKSSON IPC AB**; P.O. Box: 4188, S-203 13 Malmö (SE).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPLICATION OF LOADING LEDGES

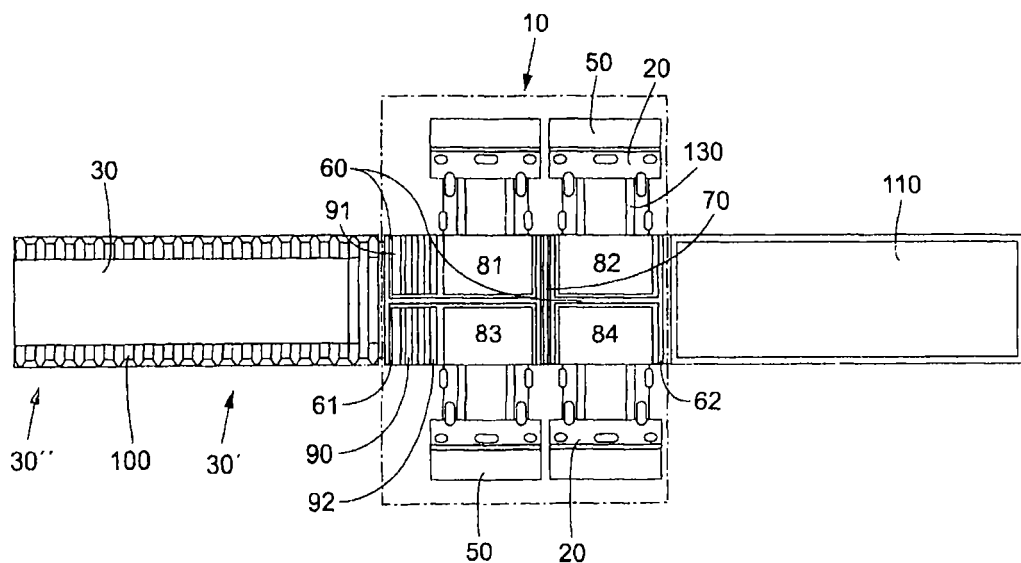

(57) Abstract: A system (10, 100, 110) for applying loading ledges (20) onto a unit load (30) positioned on supporting means (81, 82, 83, 84). The system comprises an application machine (10). The system also comprises means for separating the unit load from the supporting means in the vertical direction. The system also comprises means (50, 51, 52, 130, 140) for applying at least one loading ledge to at least two opposite, lower edges of the unit load when separated from the supporting means.

WO 03/099676 A1