




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G01M 1/36	A1	(11) International Publication Number: WO 00/65323 (43) International Publication Date: 2 November 2000 (02.11.00)
(21) International Application Number: PCT/JP00/02501 (22) International Filing Date: 18 April 2000 (18.04.00) (30) Priority Data: 11/119458 27 April 1999 (27.04.99) JP (71) Applicant (for all designated States except US): MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP). (72) Inventors; and (75) Inventors/Applicants (for US only): YAMASAKI, Naoki [JP/JP]; 59-4-203, Takanoko-cho, Matsuyama-shi, Ehime 790-0925 (JP). MOMOI, Yoshimitsu [JP/JP]; 121-12-5-306, Kanbaiko, Saijo-shi, Ehime 793-0041 (JP). (74) Agents: IWAHASHI, Fumio et al.; Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).		(81) Designated States: CN, ID, KR, SG, US. Published <i>With international search report.</i>

(54) Title: **METHOD OF CORRECTING ROTATIONAL UNBALANCE OF ROTATING MECHANISM AND CORRECTING DEVICE OF THE SAME**

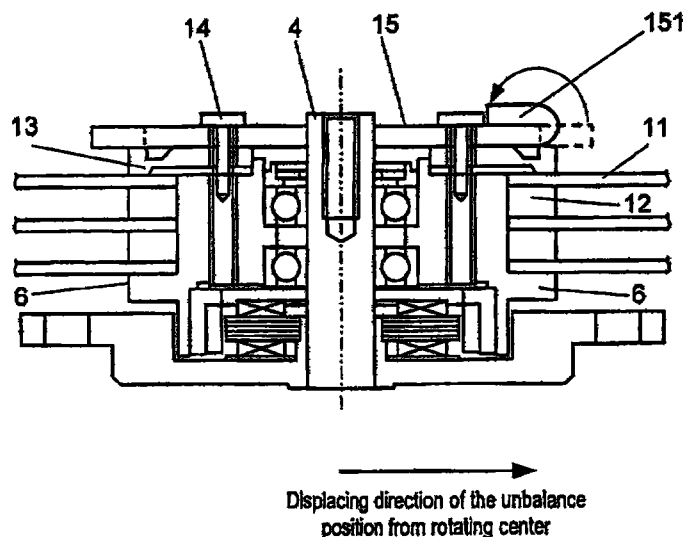

(57) Abstract

A method of correcting rotational unbalance of a rotating mechanism in, e.g. a hard-disc-driving apparatus, and a rotational unbalance correcting device. A disc-shaped plate has plural protrusions arranged equiangularly on the outer wall of the plate, and the protrusions radiate from the outer wall. The plate is mounted fixedly and coaxially to a rotating mechanism, i.e. a hub including hard discs having been fixed thereto. At least one of the protrusions is bent inward of the plate responsive to rotational unbalance of the rotating mechanism thereby achieving balance. This simple structure can correct unbalance of the rotating mechanism by simple work and free from contamination.