



(51) International Patent Classification:
B66B 9/187 (2006.01)

(21) International Application Number:
PCT/FI2010/000036

(22) International Filing Date:
27 May 2010 (27.05.2010)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20090389 23 October 2009 (23.10.2009) FI

(71) Applicant (for all designated States except US): **KONE CORPORATION** [FI/FI]; Kartanontie 1, FIN-00330 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PEACOCK, Mark** [GB/FI]; Raitasenpolku 10, FIN-11100 Riihimäki (FI).
YAN, Zhizhong [CN/FI]; Holmankorpi 3F 67, FIN-02210 Espoo (FI).

(74) Agent: **KONE CORPORATION/PATENT DEPARTMENT**; P.O. Box 677, FIN-05801 Hyvinkää (FI).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: ELEVATOR ARRANGEMENT AND METHOD

FIG. 1

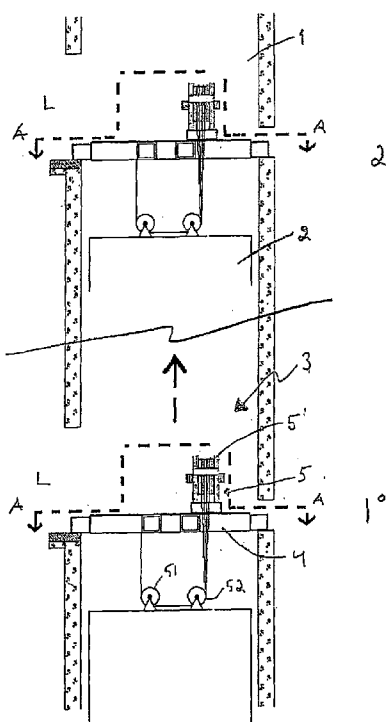

(57) Abstract: Elevator arrangement and method for manufacturing an elevator, which comprises an elevator hoist way (1), an elevator car (2), a movable supporting platform (3) for supporting the elevator components in the elevator hoist way, which supporting platform (4) comprises a supporting frame, which comprises a plurality of support elements (8'-8'') movable between a position extended from the platform towards the side and a position retracted towards the platform, supported on which support elements in their extended position the frame of the supporting platform can be lowered to rest on top of the wall structures of the elevator hoist way, for the vertical supporting of the supporting platform in the elevator hoist way, and in the retracted position of which support elements the supporting platform (4) can be moved in the vertical direction in the elevator hoist way without being obstructed by the support elements. The supporting frame (4) comprises a plurality of beams that are rigidly fixed to each other, which beams are arranged such that towards each of all four lateral directions (D1, D2, D3, D4) of the supporting platform points at least one beam end (41-44) of the supporting frame, at which beam end is a movable support element (8'-8'') belonging to the aforementioned plurality of support elements.

WO 2011/048255 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*