

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number
WO 2005/039785 A1

(51) International Patent Classification⁷: **B05D 1/30**,
1/40, 5/02, 5/06, E04F 11/17

(21) International Application Number:
PCT/NZ2004/000268

(22) International Filing Date: 28 October 2004 (28.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
529183 28 October 2003 (28.10.2003) NZ

(71) Applicant (for all designated States except US):
ECOGLO LIMITED [NZ/NZ]; Level 1, 387A Colombo
Street, Christchurch_8002 (NZ).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WATSON, Julian**,
Mark [NZ/NZ]; 129 High Street, Leeston_8151 (NZ).

(74) Agents: **WILSON, Kathryn, S.** et al.; Level 11, 119 Ar-
magh Street, P.O. Box 2201, Christchurch 8002 (NZ).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF FORMING A SLIP-RESISTANT PHOTO-LUMINESCENT DEVICE

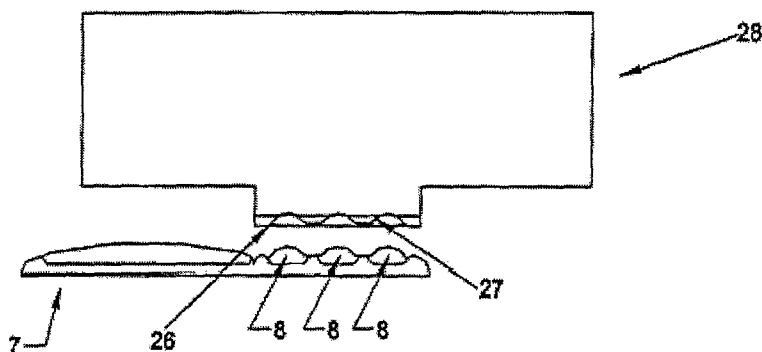

(57) Abstract: A method of manufac-
turing a slip-resistant photo-luminescent
device includes dispensing first and
second powdered components into
respective recesses (8, 13) provided in a
substrate (7) such as a metal strip. The
first powdered component includes a resin
and a friction enhancing material, the
second powdered component includes a
resin and a photo-luminescent pigment.
The powdered components are then heated
(4) to fuse the resins and bond them to
surfaces of the respective recesses (8, 13).
A channel (15) is formed between the first
and second recesses (8, 13) for receiving traces of the first and second components that may spill from the adjacent recesses.