

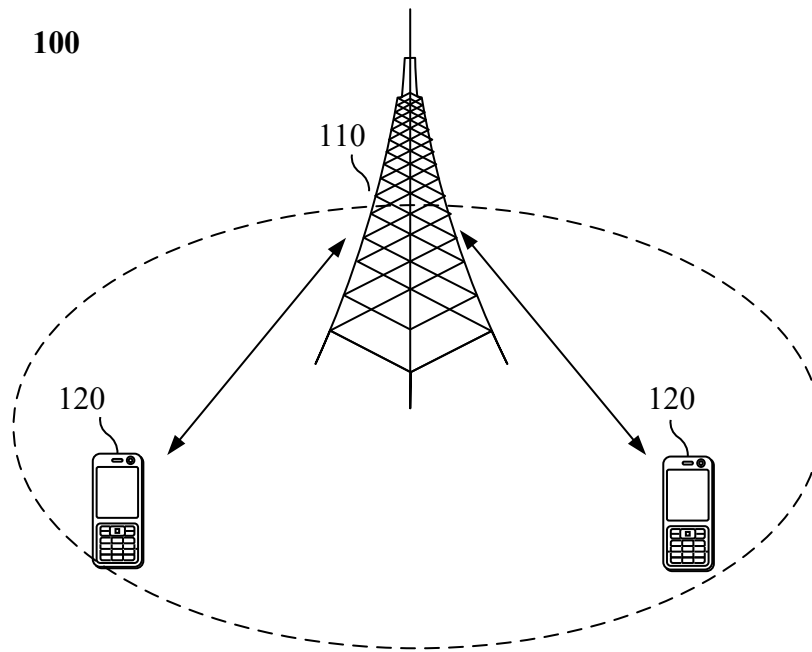


FIG. 1

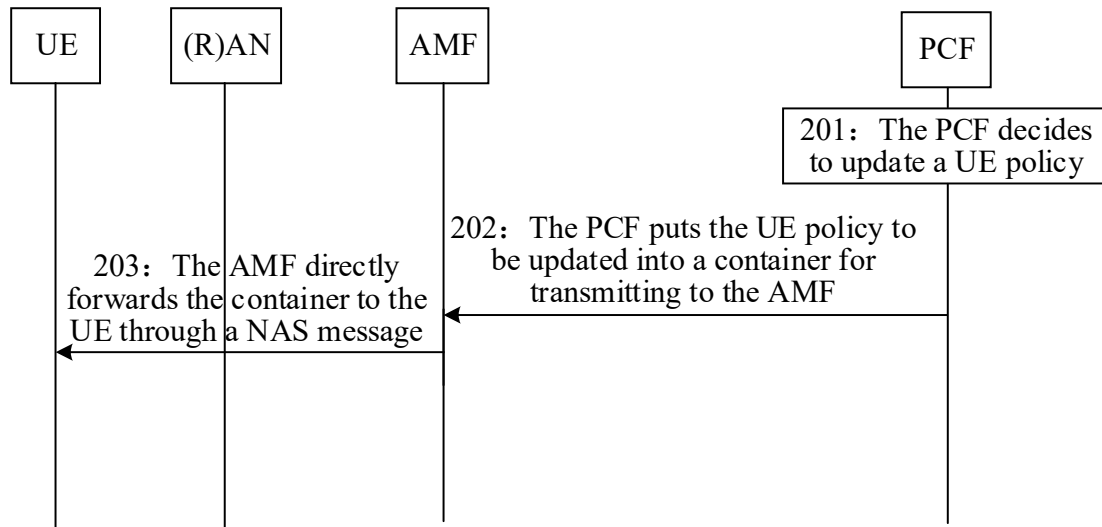


FIG. 2

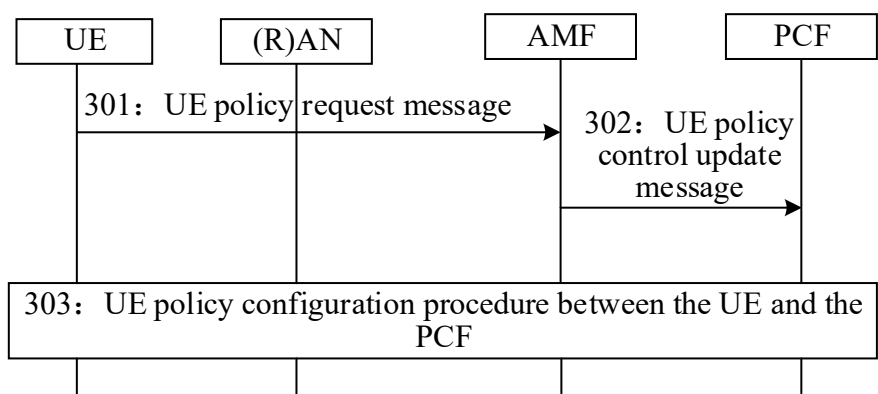


FIG. 3

A UE receives first information transmitted by a network device, here, the first information includes at least one of: a first policy, a policy type corresponding to the first policy, a service type corresponding to the first policy, indication information indicative of whether the UE is allowed to request the first policy, or a trigger condition for the UE to request the first policy

401

FIG. 4

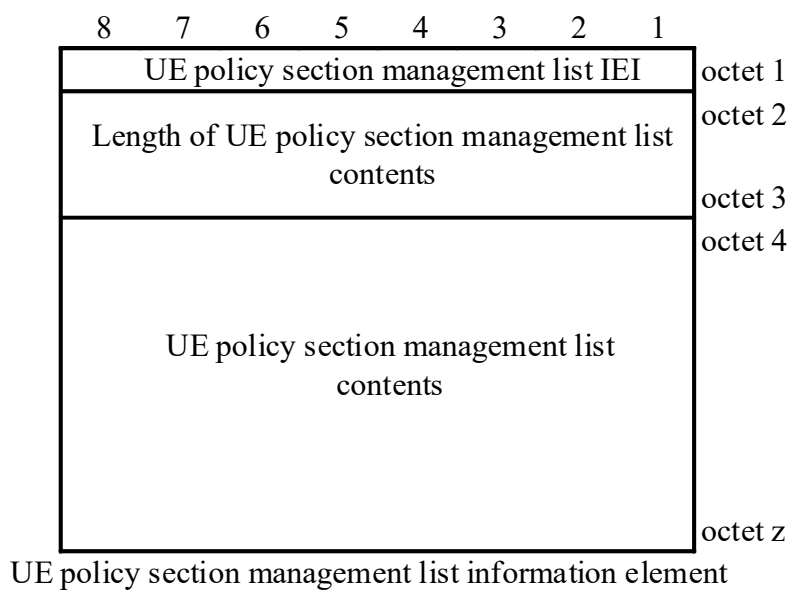


FIG. 5-1

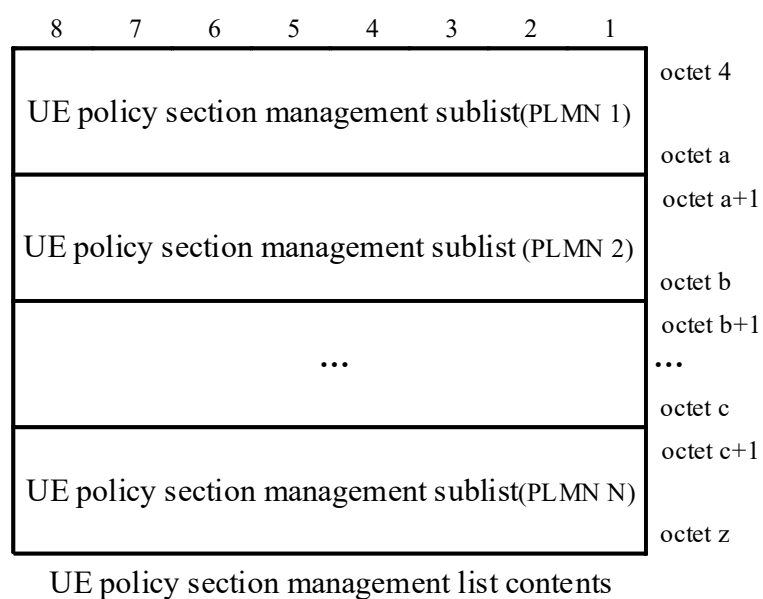


FIG. 5-2

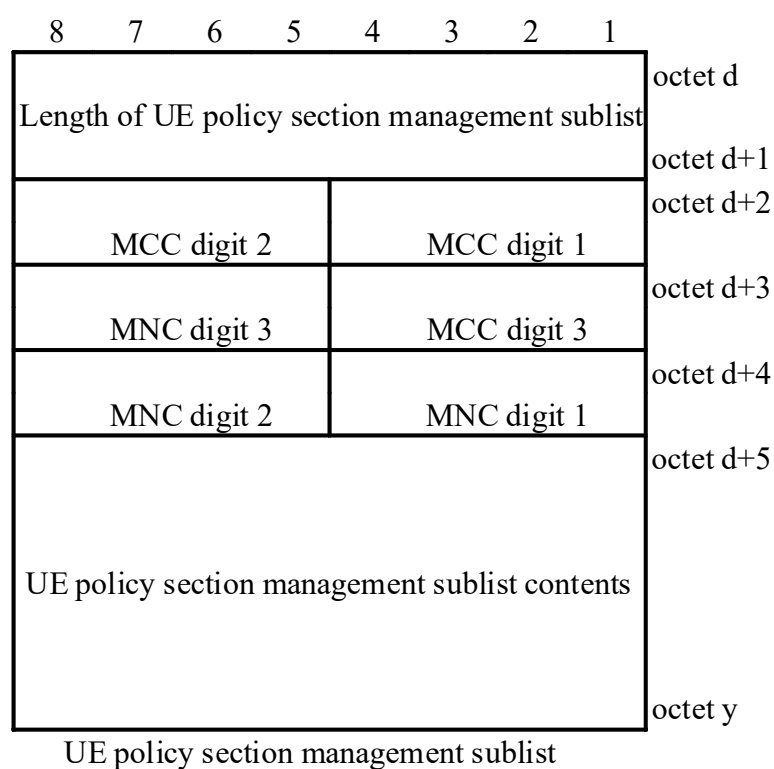


FIG. 5-3

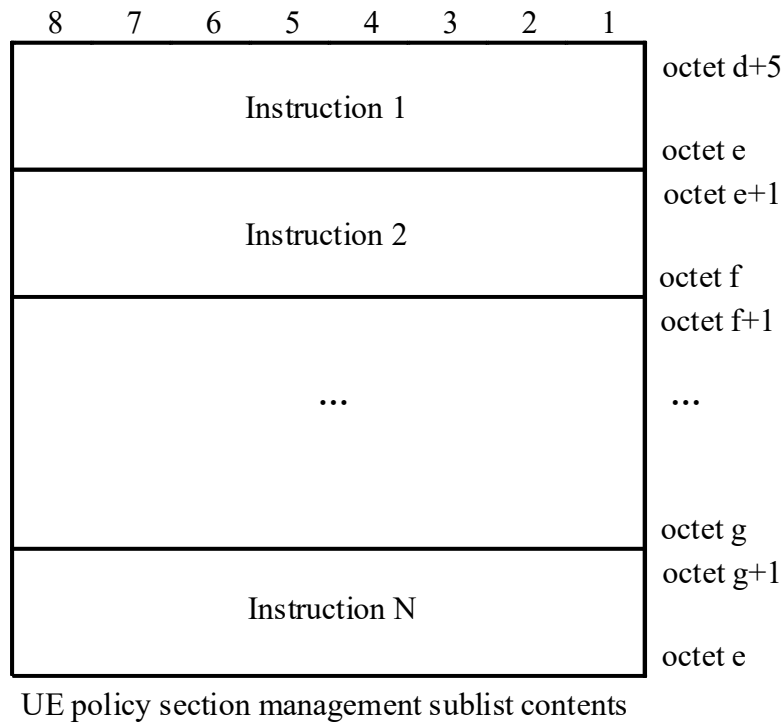


FIG. 5-4

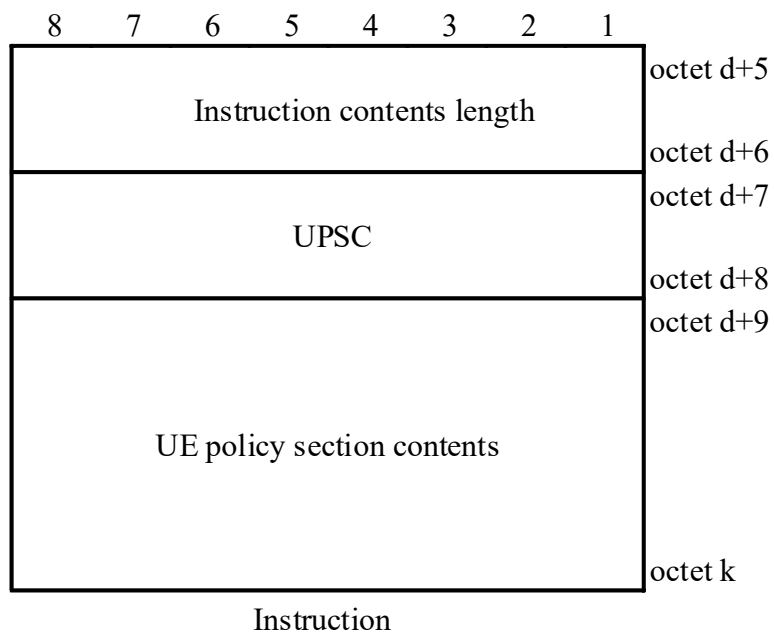


FIG. 5-5

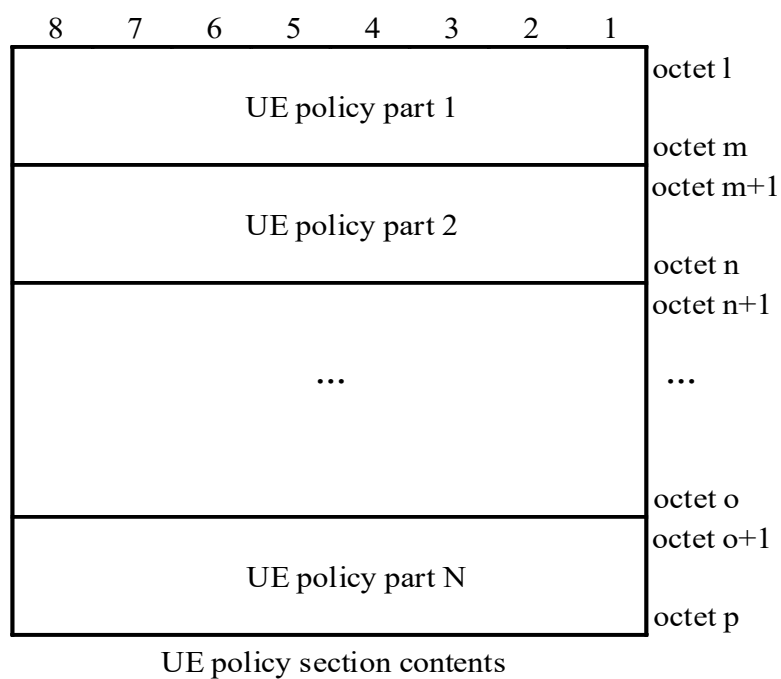


FIG. 5-6

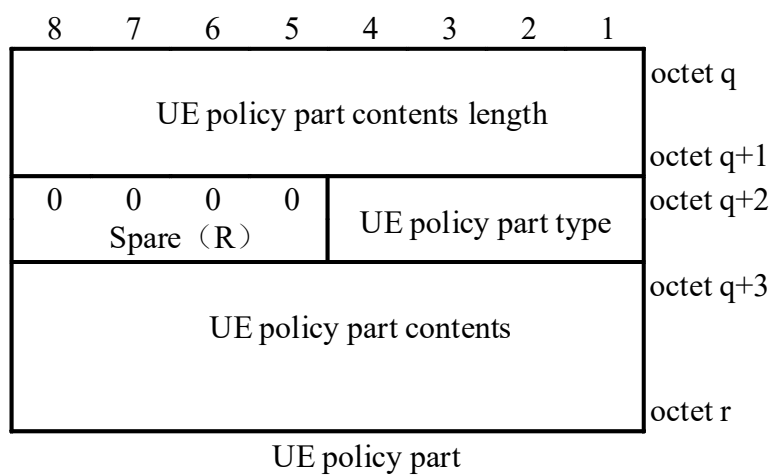


FIG. 5-7




FIG. 6-1




FIG. 6-2


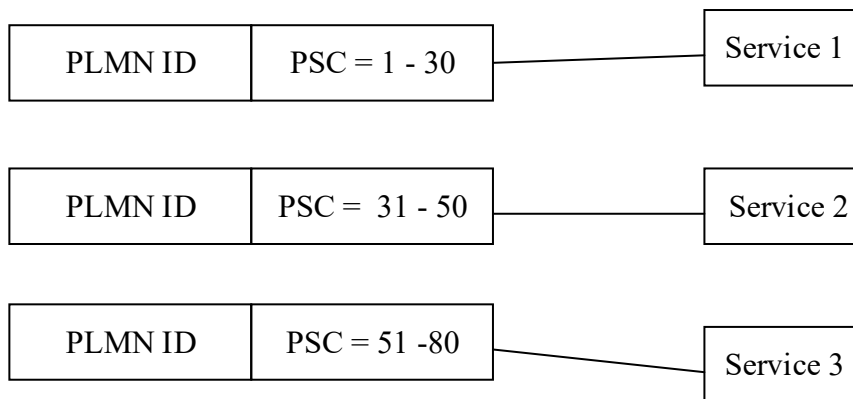


FIG. 7

801
 UE transmits a first request message to a network device, here, the first request message includes second information and the second information is configured to instruct the network device to update a policy corresponding to at least one of a target policy type or a target service type

FIG. 8

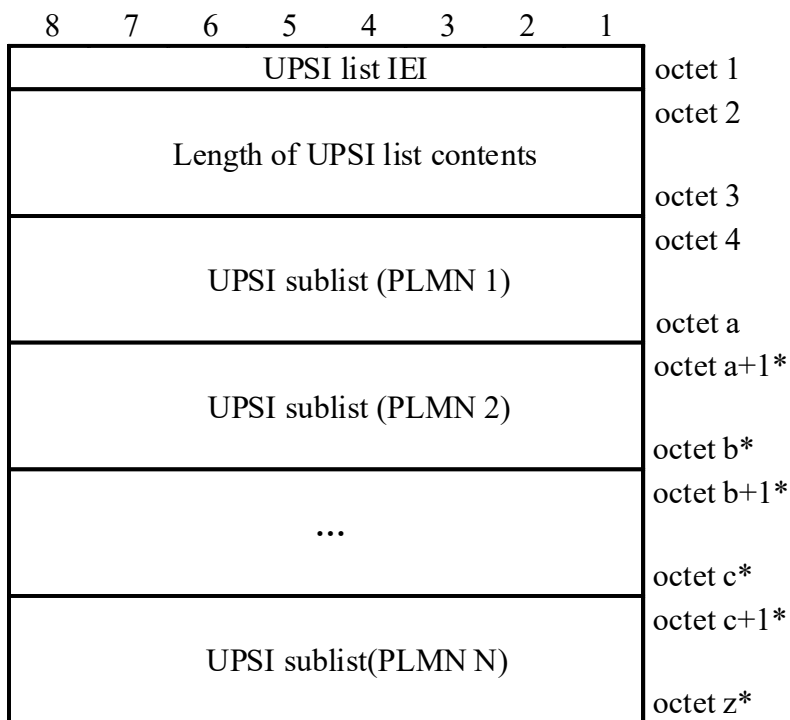

UPSI list information element

FIG. 9-1

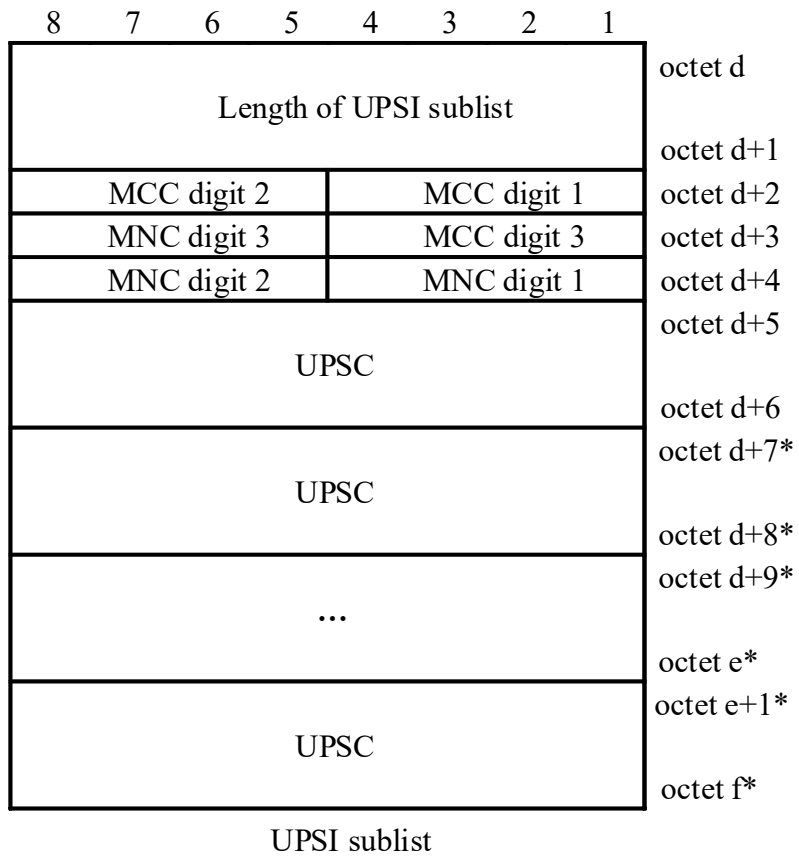


FIG. 9-2

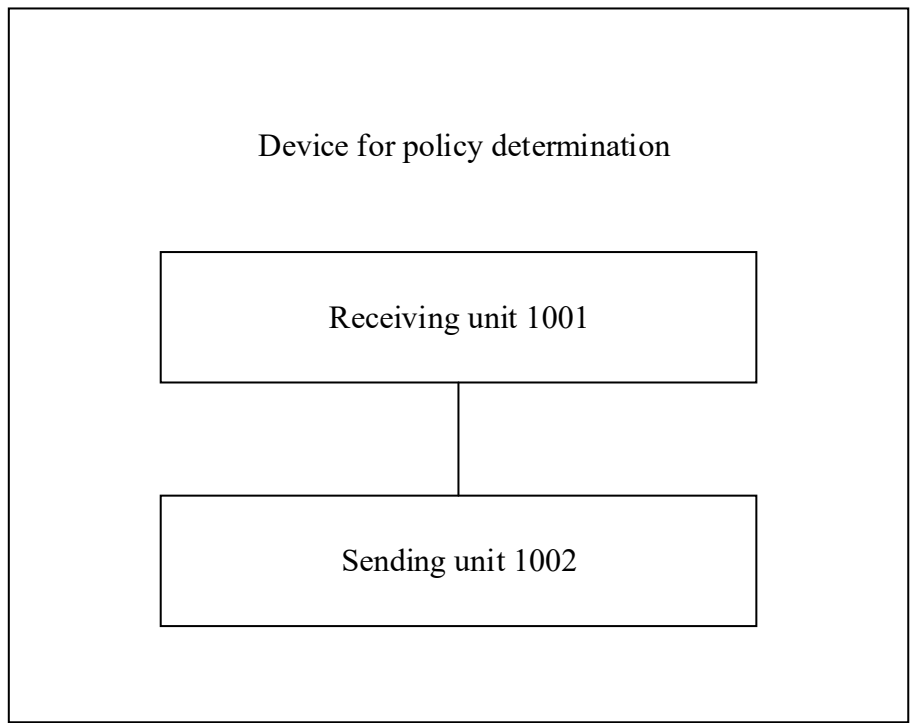


FIG. 10

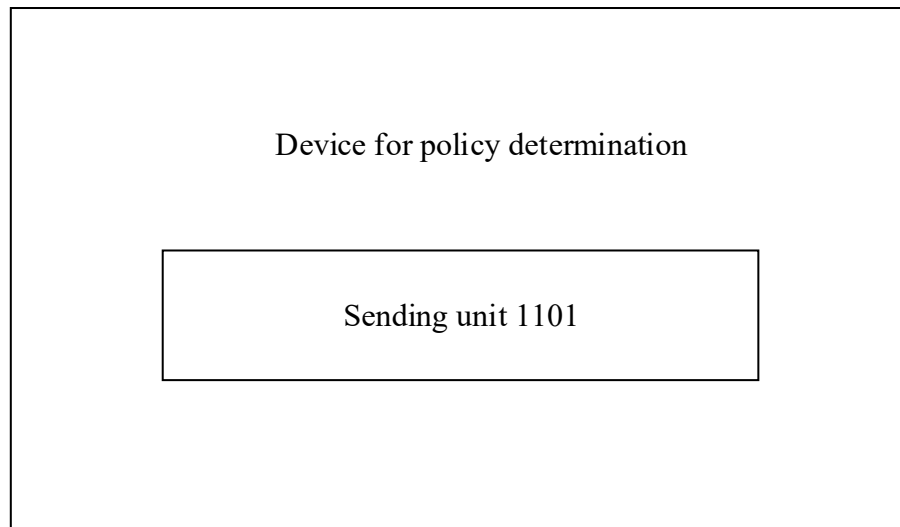


FIG. 11

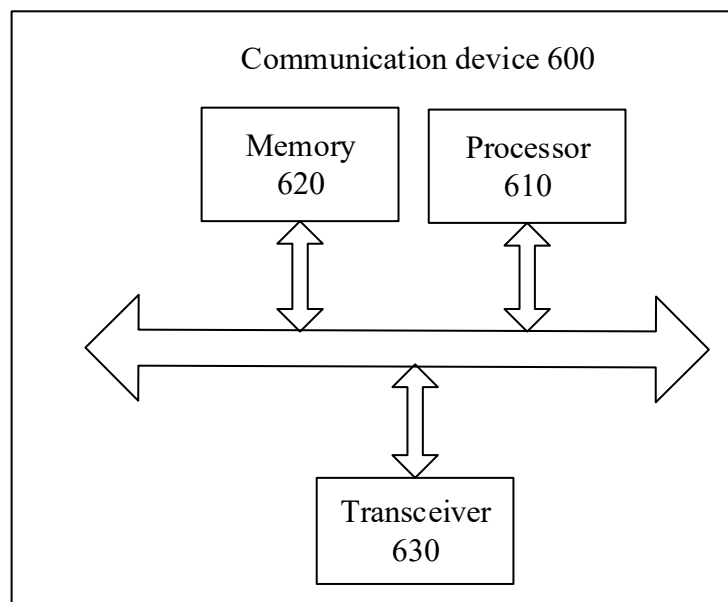


FIG. 12

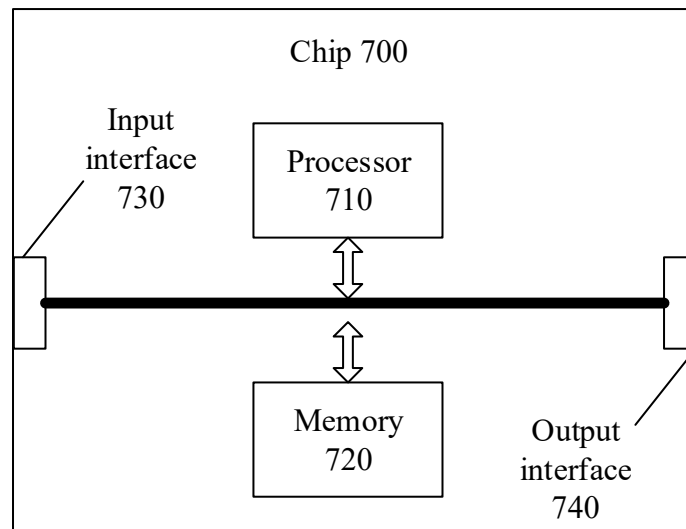


FIG. 13

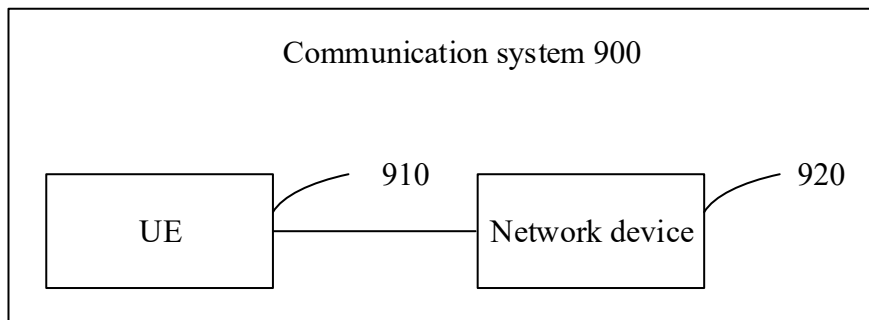


FIG. 14