

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 May 2009 (14.05.2009)

PCT

(10) International Publication Number
WO 2009/059995 A1

(51) International Patent Classification:
H04L 1/18 (2006.01) **H04L 1/00** (2006.01)
H04W 28/06 (2009.01)

(74) Common Representative: **NOKIA SIEMENS NETWORKS OY**; COO RTP IPR/Patent administration, 80240 Munich (DE).

(21) International Application Number:
PCT/EP2008/064990

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
5 November 2008 (05.11.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/996,168 5 November 2007 (05.11.2007) US

(71) Applicant (for all designated States except US): **NOKIA SIEMENS NETWORKS OY** [FI/FI]; Karaportti 3, FIN-02610 Espoo (FI).


(72) Inventor; and

(75) Inventor/Applicant (for US only): **SEBIRE, Benoist** [FR/JP]; 2-20-5 Kagurazaka Shinjuku, Tokyo, 162-0825 (JP).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: BUFFER STATUS REPORTING SYSTEM AND METHOD

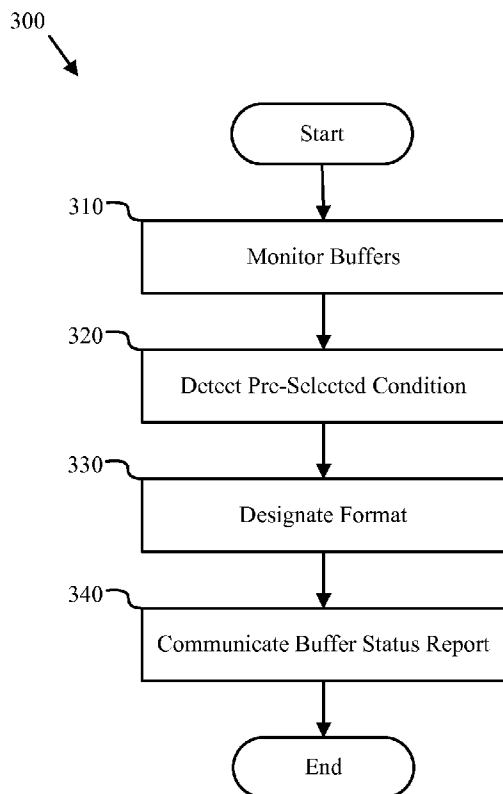

(57) Abstract: An apparatus, system and method for increasing buffer status reporting efficiency and adapting buffer status reporting according to uplink capacity. User equipment is configured to monitor a usage of a plurality of buffers, detect one of a plurality of pre-selected conditions corresponding to at least one of the plurality of buffers, designate one of a plurality of buffer status reporting formats depending on the pre-selected condition detected, communicate a buffer status report to a network device in accordance with the buffer status reporting format designated. The buffer status reporting format is configured to minimize buffer status reporting overhead created by the communicating of the buffer status report.

FIG. 3



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*