



- (51) International Patent Classification:  
*H04L 5/00* (2006.01)
- (21) International Application Number:  
PCT/SE2011/050900
- (22) International Filing Date:  
4 July 2011 (04.07.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L M ERICSSON (PUBL)** [SE/SE]; S-164 83 Stockholm (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **FRENNE, Mattias** [SE/SE]; Arkeologvägen 20, SE-754 43 Uppsala (SE). **BALDEMAIR, Robert** [AT/SE]; Ängkärrsgatan 3, SE-171 70 Solna (SE). **CHENG, Jung-Fu** [US/US]; 1731 Mandan Place, Fremont, California CA 94539 (US). **GERSTENBERGER, Dirk** [DE/SE]; Birger Jarlsgatan 113 C, SE-113 56 Stockholm (SE). **KOORAPATY, Havish** [US/US]; 13425 Kodiak Place, Saratoga, California CA
- 95070 (US). **LARSSON, Daniel** [SE/SE]; Storgatan 50, SE-171 52 Solna (SE).
- (74) Agent: **HASSELGREN, Joakim**; Ericsson AB, Patent Unit LTE, Torshamnsgatan 23, S-164 80 Stockholm (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: METHODS AND APPARATUSES FOR AN EXTENDED BANDWIDTH CARRIER

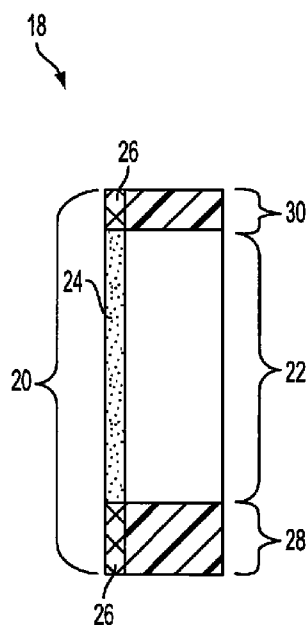


FIG. 5

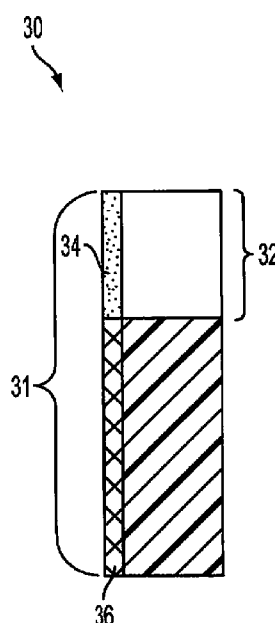


FIG. 6

(57) Abstract: Apparatuses and methods allow for uplink selection using an extended bandwidth carrier. A user equipment (UE) comprises: a transceiver configured to receive control signaling on an extended bandwidth carrier, the extended bandwidth carrier having a first control region disposed within a legacy bandwidth, and a second control region including additional resource blocks disposed outside of the legacy bandwidth, wherein the transceiver can receive the control signaling in either or both of the first control region and the second control region.



---

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**  
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

**Declarations under Rule 4.17:**

— *of inventorship (Rule 4.17(iv))*