The present invention relates to a dosage inhalator for dispensing to a patient a pharmacologically active compound or substance suspended in a fluid comprising a nozzle, a conduit connected to said nozzle, a storage means adjacent said conduit containing multiple doses of said active compound to be dispensed, a carrying means having portions for carrying predetermined and reproducible unit doses of said active compound, said carrying means being mounted for movement between said conduit and said storage means to position one of said portions in said conduit whereby said unit dose of said active compound located at said portion can be dispensed into the conduit said carrying menas being actuated by means of a maneuvering means.

Background of the invention

Dosage inhalators of the general type described above are disclosed for instance in US-A-4,524,769, which is directed towards a dosing means in a dosage inhalator, and US-A-4,668,218, which is directed towards a indicating means indicating the number of doses used or still remaining in a dosage dispensing means illustrated in an inhalator. In some cases it may however be advantageous that the patient is given a clear and unambiguous indication that the supply of the pharmacologically active compound is exhausted. It further is desirable with an indicating means having a design which is simple and cheap to manufacture and which in a simple way can be set automatically to the actual number of doses filled into the dosage

This Sheet Has Been Replaced

REPLACED SHEETS SG
☑ Description : paged 1 to paged 11
☑ Claim(s) : paged 12 to paged 16
☐ Drawing(s) : paged 1 to paged 2
☐ Abstract : paged 17 to paged —

These and other objects are achieved in that said inhalator comprises means for disrupting the movement of said maneuvering means directly or indirectly upon exhaustion of said active compound in said storage means. In this description the expression "disrupt" is used in the sense "to cause to break down", for instance locking the maneuvering means or allowing the maneuvering means to rotate freely in one or both rotational directions. In this way the patient is given a clear indication that the supply of compound is exhausted.

A further aspect of said inhalator is the providing of means for indicating either the number of doses remaining in said storage means or the number of doses used, said indicating means comprising a screw and nut mechanism being rotated by said intermittent movement of said carrying means, the relative movement between the screw and the nut in said mechanism being caused by said rotation being used for actuating said indicating means. The screw and nut mechanism preferably is provided with features for a quick adjustment in order to allow the indicating means to be preset easily to different numbers of doses.

In a preferred embodiment the relative movement between the screw and the nut in the screw and nut mechanism is utilized to disrupt the movement of the maneuvering means.

This Sheet Has Been Replaced



Fig 2 shows a partly sectioned longitudinal view of the inhalator shown in Fig 1,

Fig 3 shows a cross-section through the lower part of the inhalator in Fig 1,

Fig 4 shows a longitudinal section through a second embodiment of the inhalator.

Detailed description of preferred embodiments of the invention

The invention will be illustrated below as adapted to a breath-actuated inhalator intended for administering a solid pharmacologically active compound in micronized form of the general kind described in US-A-4,524,769. The expressions "upper", "lower" etc are only used below with reference to the orientation of the inhalator in for instance Fig 1 and are not to be construed as limiting. As shown in Figs 1 - 3, the inhalator in a first embodiment comprises a housing 1 on which a nozzle 2 is mounted. The housing contains a conduit 3 for conducting ambient air through the housing to the nozzle 2 when the patient inhales through the inhalator. The housing further contains a storage chamber 4 for the micronized compound. The compound is transferred to the air conduit 3 from the storage chamber by means of a rotatable disc or membrane 5 containing conical holes 6. The disc 5 is mounted on a shaft 7 which is journalled in the housing 1. The under side of the disc 5 is provided with a ratchet wheel 8 cooperating with a pawl 9 attached to a rotatable maneuvering wheel 10 journalled onto the

This Sheet Has Been Replaced



12, 13 extending downwards from the housing. When the wheel 10 is rotated in one direction from one limit to the other, the ratchet wheel 8, and consequently also the disc 5, will be rotated a distance which is determined by the distance between the stops 12, 13. When the maneuvering wheel is rotated in the other direction the ratchet wheel 8 and the disc 5 will remain stationary. The holes 6 are located in such a way on the disc that there always will be one or several holes 6 which will be located (and consequently will be filled) in the storage chamber 4 at the same time as one or several filled holes 6 are located in the air conduit 3 in one end position of the maneuvering wheel 10. This means that one movement of the maneuvering wheel 10 from one limit position to the other and back will ensure that there will be one or several filled holes 6 in the air conduit 3. When the patient inhales through the nozzle 2, air will be sucked through an air intake 14, through the holes 6 in the air conduit 3 to the nozzle 2, thus entraining the micronized compound in the holes 6 into the respiratory tract of the patient. The nozzle 2 may contain a deaggregating means 15 deaggregating any agglomerations that for instance may have formed when the micronized compound is filled into the holes 6.

When the inhalator has been used, a movement of the maneuvering wheel 10 from one end position to the other and back will, as mentioned above, ensure that a new dose will be located in the air conduit 3.

This Sheet Has Been Replaced



longitudinal direction of the screw whereas the lower flanks 22 of the threads are more or less perpendicularly oriented relative to the longitudinal direction of the screw 16. The nut means is in the form of a tip 17 attached to a resilient arm 20 slideably supported in a guide 23 on the inner wall of the housing 1. In the initial position the major part of the arm 20 extends out from the guide 23. The under side of the tip 17 is oriented to be generally parallel to the upper flanks of the threads and the upper side of the tip 17 is oriented to be generally in parallel to the lower flank of the threads. This results in that the arm 20 and the tip 17 can be slid along the screw in the manner of a ratchet mechanism to any desired position along the upper part of the screw. The tip will however move downwards with the rotation of the screw from any such position. The upper part 18 of the screw 16 is generally cylindrical, whereas the lower part 19 is conical in shape. The pitch of the threads on the cylindrical part 18 of the screw 16 is much finer than the pitch of the threads on the conical part 19.

The upper part of the arm 20 is initially bent inwards, by which means the tip 17 is spring-biased towards the threads of the screw 16.

When the arm 20 moves downwards in the guide 23, an increasing length of the arm will be located in the guide and consequently be bent outwards and fixed against the wall of the housing 1, entailing that the

This Sheet Has Been Replaced



The lower end of the screw 16 is provided with cogs 24 which are engagement with cogs 25 on the shaft 7 by means of an intermediate cogwheel 26. A rotation of the disc 5 consequently will result in a rotation of the screw 16 entailing a downward movement of the arm 20. The outer side of the arm 20 is provided with a scale indicating the number of doses still remaining which is visible through a window in the housing provided with an index 27.

A visual indication that the supply of the compound is close to be exhausted can be obtained in that the window is designed with a length which is sufficient to allow the screw to be seen above the arm when the arm comes close to its lower end position. In this case the screw preferably should be made of brightly colored material to indicate exhaustion of available doses.

The lower end 28 of the arm 20 is oriented obliquely relative to the longitudinal direction of the inhalator. The guide 23 is located just before the stop 12 limiting the movement of the lever 11, as seen in the direction of movement of the lever 11 towards the stop 12. A cut out portion 29 in the lower edge of the wall of the housing 1 having a width corresponding to the width of the lever 11 is located adjacent the stop 12 after the stop 12.

Initially, directly after the manufacturing of the inhalator, the nut or tip 17 is located above the threads of the screw 16. By this means the function of


This Sheet Has Been Replaced



tip 17 is pushed into engagement with the threads of the screw 16. If the full amount of micronized compound possible is to be filled into the storage chamber, the tip 17 is merely pushed downwards into engagement with the uppermost of the threads and the maximum number of doses will be visible in the window. Should it be desirable to fill a smaller amount of micronized powder (i.e. a smaller number of doses), the tip 17 is slid further downwards over the threads, a smaller number of doses then being indicated in the window. This movement of the tip 17 can be performed automatically by means of pins of different lengths which are inserted through a hole in the upper wall of the housing directly above the guide 23, this preferably in conjunction with the filling of the inhalator.

The arm 20 will move downwards at a constant rate in conjunction with the rotation of the disc 5 as long as the tip 17 is located on the upper part 18 of the screw 16. When the tip 17 reaches the conical part 19 of the screw, the downward movement of the tip will accelerate due to the much coarser pitch of the threads on this part and the lower end 28 of the arm 20 will move relatively fast into the path of the lever 11. At its lowest position (corresponding to an almost exhausted storage chamber), the lower end 28 of the arm 20 will function as a slideway for the resilient lever 11 which by this means is lifted over the stop 12 and snaps down into the cut out portion 29 behind the stop 12. The lever can be locked in either the loading or the dispensing position of the carrying means depending on

This Sheet Has Been Replaced



be used any more.

An alternative embodiment of the inhalator is shown in Fig 4. The reference signs for parts in Fig 4 being similar to parts in Figs 1 - 3 differ from the reference signs relating to Figs 1 - 3 only in that they are numbered from 100 and upwards. Only the parts being necessary for the understanding of the differences between the two embodiments will be described in connection with Fig 4.

In this embodiment the shaft 107 mounting the rotatable disc 105 is shaped as a hollow sleeve containing the screw 116. The threads on the screw 116 have the same general shape as the threads in the above embodiment although they may have the same pitch over the entire length of the screw. The screw 116 will be oriented upside down relative to the screw 16 in Figs 1 - 3, the sloping flanks of the threads will be facing downwards.

The arm 120 is shaped as a resilient tongue cut longitudinally in the wall of the sleeve 107 with the free end facing downwards and carrying the nut means in the form of a tip 117 projecting into the interior of the sleeve 107. The tip 117 has the general shape of the tip 17 in the above embodiment but is also turned upside down in relation to the tip 17. The pitch of the screw is chosen such that the screw will move downwards when the disc 105 is rotated by means of the ratchet mechanism 108, 109.

This Sheet Has Been Replaced



the disc 105 is rotated.

The indicating means are in the form of a bar 132 carrying a scale showing the number of remaining doses through a window 133 and being slideable in a longitudinal guide 123 arranged on the inside of the wall of the housing 101. The bar 132 is rigidly connected to the screw 116 by means of an intermediate bar 131 and will consequently move with the longitudinal movements of the screw 116.

As described above, the screw 116 will move downwards for each rotational movement of the disc 105. When the contents of the storage chamber 104 is nearing exhaustion, the lower end of the screw 116 will engage the resilient lever 111 bending the lever downwards. Since the screw 116 engages the lever relatively close to the attachment point thereof, a relatively small movement of the screw will move the free end of the lever a comparatively large distance. In the end position of the screw, corresponding to an almost exhausted supply of micronized compound, the free end of the lever will be pushed down in an inner groove 130 in a wall portion of the maneuvering wheel 110, which means that the maneuvering wheel can be rotated freely without actuating the rotatable disc 105.

In this way again a clear indication is given that the inhalator is empty and consequently no longer should be used.

This Sheet Has Been Replaced



and which on the other hand gives a clear and unambiguous indication that the compound in the inhalator is exhausted and that the inhalator consequently no longer should be used. The constructive details enabling this are relatively simple and cheap to manufacture.

As mentioned above, the well-defined rotational reciprocal movement of the maneuvering means between two end positions indicate normal movement of said carrying means in connection with dispensing a unit dose into said conduit. The device according to the invention will drastically alter this regularity of the movement, either by locking the maneuvering means or by eliminating one or both of the two end positions of the maneuvering means.

Possible modifications of the invention

It should be noted that the invention of course can be modified in many ways within the scope of the appended claims.

It should for instance be emphasized that, although the maneuvering means and the carrying means in the above preferred embodiments have been illustrated as being two separate parts, it of course also is conceivable to design the maneuvering means as an integral part of the carrying means, e.g. as a knurled portion of the

This Sheet Has Been Replaced

arm 20. The scale can of course be located on nte resilient arm and the index on the housing.

Another possible modification of the dosage inhalator according to the invention is to arrange the threads on the respective component in said screw and nut mechanism in a manner to allow them to be disengaged from each other in order to permit said translational movement.

This Sheet Has Been Replaced

comprising a nozzle (2), a conduit (3) connected to said nozzle, a storage means (4) adjacent said conduit (3) containing multiple doses of said active compound to be dispensed, a carrying means (5,105) having portions (6) for carrying predetermined and reproducible unit doses of said active compound, said carrying means (5,105) being mounted for movement between said conduit (3) and said storage means (4) to position one of said portions (6) in said conduit (3) whereby said unit dose of said active compound located at said portion (6) can be dispensed into the conduit, said carrying means being actuated by means of a maneuvering means (10, 110),
c h a r a c t e r i z e d in that said inhalator further comprises means (20,117) for disrupting the movement of said maneuvering means (10, 110) directly or indirectly upon exhaustion of said active compound in said storage means (4).

2. Dosage inhalator according to claim 1,
c h a r a c t e r i z e d in that said carrying means (5) is actuated by means of a ratchet mechanism (8,9) including a spring-biased pawl (9) and in that the movement of said ratchet mechanism is limited by means of a lever (11) being reciprocally displaceable between two distinct positions, said means for disrupting the movement of said carrying means placing said lever (11) in a locked state upon exhaustion of said drug in said storage means (4).

This Sheet Has Been Replaced

the movement of said ratchet mechanism (108,109) is limited by means of a lever (111) being reciprocally displaceable between two distinct positions, said means (117) for disrupting the movement of said maneuvering means freeing said lever upon exhaustion of said drug in said storage means.

4. Dosage inhalator according to any one of the preceding claims, c h a r a c t e r i z e d in that said inhalator further comprises means for indicating the number of doses remaining in said storage means or the number of doses used, said indicating means comprising a screw and nut mechanism (16,17;116,117) being rotated by said intermittent movement of said maneuvering means and/or said carrying means (5,105), the relative movement between screw and nut caused by said rotation being used to interrupt the movement of said maneuvering means (10, 110) after a predetermined number of rotations.

5. A dosage inhalator for dispensing to a patient a pharmacologically active compound suspended in a fluid comprising a nozzle (2), a conduit (3) connected to said nozzle, a storage means (4) adjacent said conduit (3) containing multiple doses of said active compound to be dispensed, a carrying means (5,105) having portions (6) for carrying predetermined and reproducible unit doses of said active compound, said carrying means (5,105) being mounted for intermittent movement between said conduit (3) and said storage

This Sheet Has Been Replaced



means of a maneuvering means (10, 110),
c h a r a c t e r i z e d in that said inhalator further comprises means for indicating either the number of doses remaining in said storage means or the number of doses used, said indicating means comprising a screw and nut mechanism (16,17;116,117) being rotated by said intermittent movement of said carrying means (5,105), the relative movement between the screw (16,116) and the nut (17,117) in said mechanism being caused by said rotation being used for actuating said indicating means.

6. Dosage inhalator according to claim 5,
c h a r a c t e r i z e d in that said relative movement between screw (16,116) and nut (17,117) caused by said rotation is used to disrupt the movement of said maneuvering means directly or indirectly after a predetermined number of rotations.

7. Dosage inhalator according to claim 5,
c h a r a c t e r i z e d in that said carrying means (5) is actuated by means of a ratchet mechanism (8,9) including a spring-biased pawl (9), in that the movement of said ratchet mechanism is limited by means of a lever (11) being reciprocally displaceable between two distinct positions, said relative movement between screw (16) and nut (17) being used to move and place said lever (11) in a locked state upon exhaustion of said drug in said storage means (4).

This Sheet Has Been Replaced

that the movement of said ratchet mechanism (108,109) is limited by means of a lever (111) being reciprocally displaceable between two distinct positions, said relative movement between screw (116) and nut (117) being used to free the reciprocal movement of said lever (111) from being limited by said two distinct positions upon exhaustion of said drug in said storage means (4).

9. Dosage inhalator according to claim 5, c h a r a c t e r i z e d in that said screw and nut mechanism (16,17; 116,117) is provided with a quick adjustment feature allowing a relative translational movement between the screw and the nut facilitating the movement of said indicating means to different positions indicating different amounts of doses.

10. Dosage inhalator according to claim 9, c h a r a c t e r i z e d in that said relative translational movement is achieved automatically by the means used for filling the inhalator in response to the number of doses actually being filled.

11. Dosage inhalator according to claim 10, c h a r a c t e r i z e d in that said translational movement is achieved by means of pins having different lengths acting directly or indirectly upon the screw and nut mechanism by pushing one of the component parts thereof to a position corresponding to the length of the pin in question.

This Sheet Has Been Replaced

said translational movement.

13. Dosage inhalator according to claim 12, c h a r a c t e r i z e d in that the nut component of said screw and nut mechanism is in the form of one or several resilient biased projections or tips (17, 117) engaging the threads on the screw component (16, 116), one of the flanks of said projections being more obliquely oriented relative to the longitudinal direction of the screw (16, 116) than the other flank in order to allow said projection(s) or tip(s) to be slid easily over the threads on the screw in one longitudinal direction but not in the opposite longitudinal direction in the manner of a ratchet mechanism.

14. Dosage inhalator according to claim 13, c h a r a c t e r i z e d in that the flanks of the threads on the screw (26, 116) engaging said obliquely oriented flank(s) on said projection(s) slope conically in order to facilitate the said sliding movement of said projection(s) or tip(s) one said one longitudinal direction.

15. Dosage inhalator according to any one of claims 13 or 14, c h a r a c t e r i z e d in that projection(s) or tip(s) (17, 117) are located on a resilient arm or lever (20, 120).

This Sheet Has Been Replaced



nozzle (2), a conduit (3) connected to said nozzle, a storage means (4) adjacent said conduit (3) containing multiple doses of said active compound to be dispensed, a carrying means (5) having portions (6) for carrying predetermined and reproducible unit doses of said active compound, said carrying means being mounted for movement between said conduit (3) and said storage means (4) to position one of said portions (6) in said conduit (3) whereby said unit dose of said active compound located at said portion (6) can be dispensed into the conduit, said carrying means being actuated by means of a maneuvering means (10, 110). The inhalator further comprises means (20,) for disrupting the movement of said maneuvering means (10, 110) directly or indirectly upon exhaustion of said active compound in said storage means (4). In an alternative embodiment the inhalator comprises means for indicating either the number of doses remaining in said storage means or the number of doses used, said indicating means comprising a screw and nut mechanism being rotated by said intermittent movement of said carrying means, the relative movement between the screw (16) and the nut (17) in said mechanism being caused by said rotation being used for actuating said indicating means.

Fig 1.

This Sheet Has Been Replaced



FIG 1



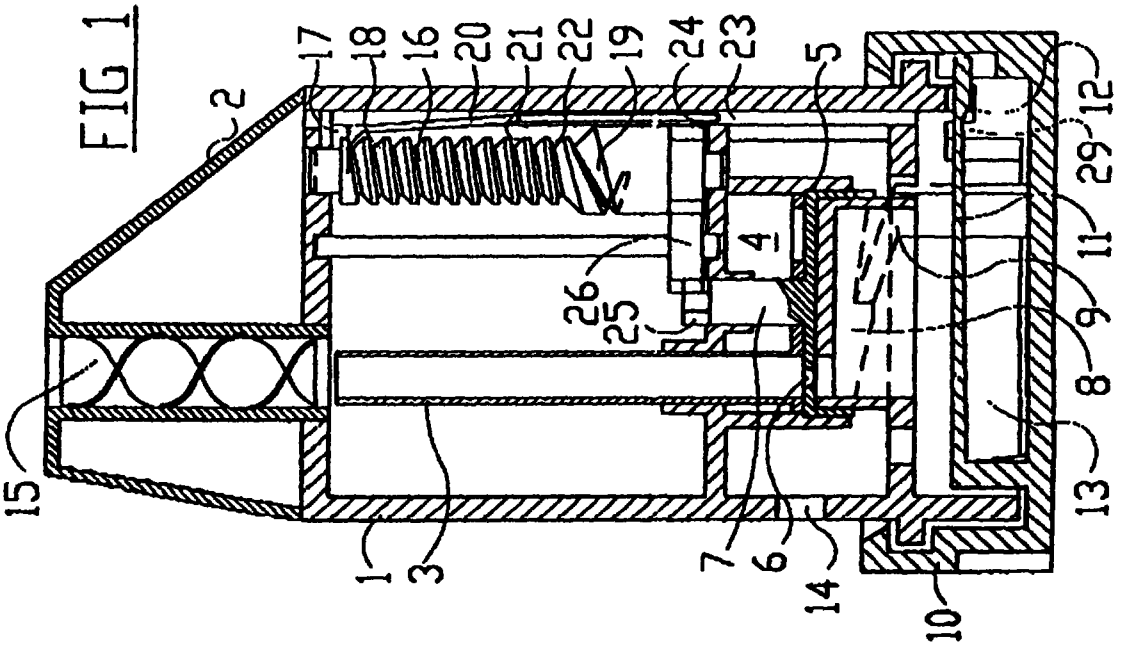


FIG 2

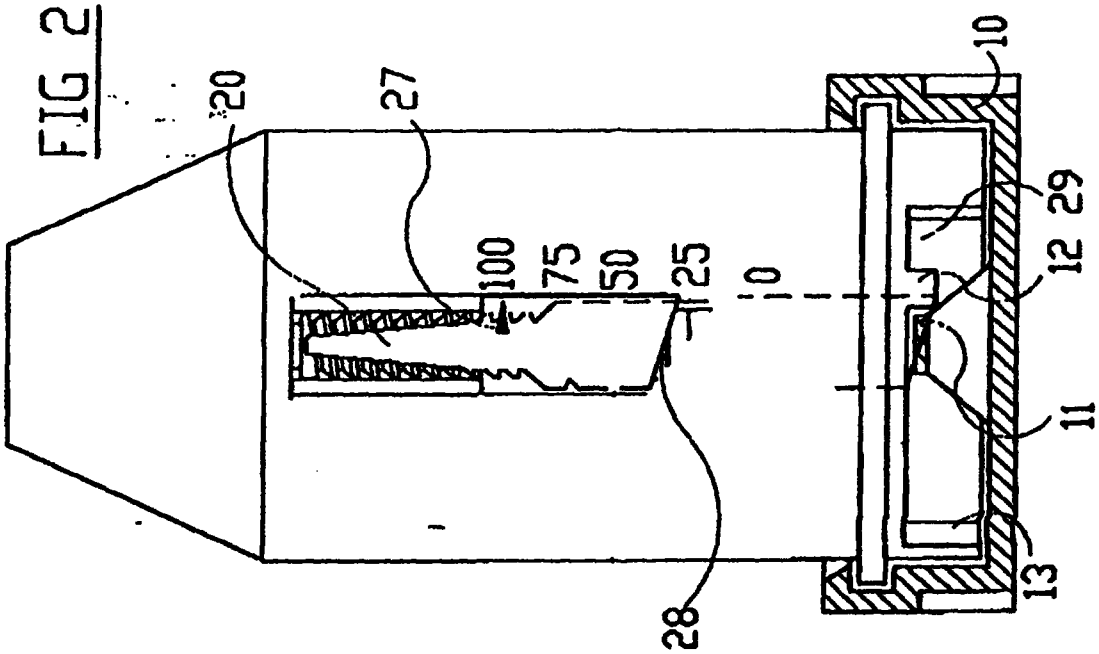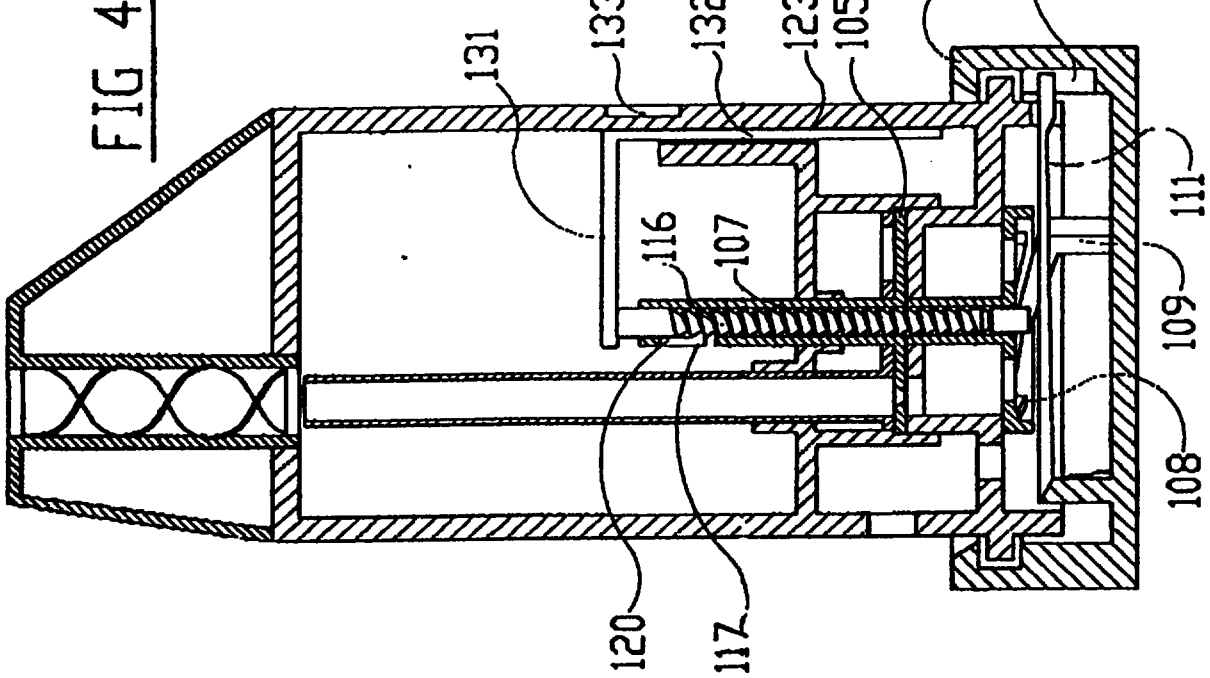

This Sheet Has Been Replaced

FIG 4



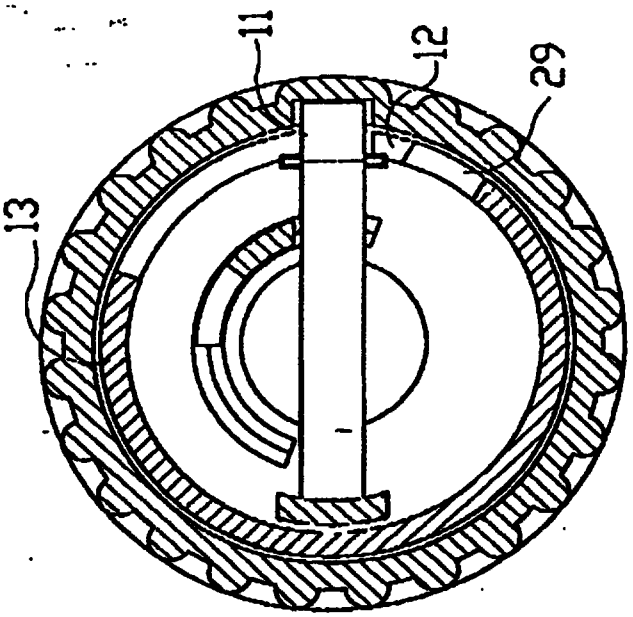


FIG 3


This Sheet Has Been Replaced

Technical field of the invention

The present invention relates to a dosage inhalator for dispensing to a patient a pharmacologically active compound or substance suspended in a fluid comprising a nozzle, a conduit connected to said nozzle, a storage means adjacent said conduit containing multiple doses of said active compound to be dispensed, a carrying means having portions for carrying predetermined and reproducible unit doses of said active compound, said carrying means being mounted for movement between said conduit and said storage means to position one of said portions in said conduit whereby said unit dose of said active compound located at said portion can be dispensed into the conduit said carrying menas being actuated by means of a maneuvering means.

Background of the invention

Dosage inhalators of the general type described above are disclosed for instance in US-A-4,524,769, which is directed towards a dosing means in a dosage inhalator, and US-A-4,668,218, which is directed towards a indicating means indicating the number of doses used or still remaining in a dosage dispensing means illustrated in an inhalator. In some cases it may however be advantageous that the patient is given a clear and unambiguous indication that the supply of the pharmacologically active compound is exhausted. It further is desirable with an indicating means having a design which is simple and cheap to manufacture and which in a simple way can be set automatically to the actual number of doses filled into the dosage

This Sheet Has Been Replaced

This is the replacement sheet
Date: 05 NOV 1996

These and other objects are achieved in that said inhalator comprises means for disrupting the movement of said maneuvering means directly or indirectly upon exhaustion of said active compound in said storage means. In this description the expression "disrupt" is used in the sense "to cause to break down", for instance locking the maneuvering means or allowing the maneuvering means to rotate freely in one or both rotational directions. In this way the patient is given a clear indication that the supply of compound is exhausted.

A further aspect of said inhalator is the providing of means for indicating either the number of doses remaining in said storage means or the number of doses used, said indicating means comprising a screw and nut mechanism being rotated by said intermittent movement of said carrying means, the relative movement between the screw and the nut in said mechanism being caused by said rotation being used for actuating said indicating means. The screw and nut mechanism preferably is provided with features for a quick adjustment in order to allow the indicating means to be preset easily to different numbers of doses.

In a preferred embodiment the relative movement between the screw and the nut ~~in~~ the screw and nut mechanism is utilized to disrupt the movement of the maneuvering means.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 05 NOV 1996

embodiment of the inhalator,
Fig 2 shows a partly sectioned longitudinal view of the inhalator shown in Fig 1,
Fig 3 shows a cross-section through the lower part of the inhalator in Fig 1,
Fig 4 shows a longitudinal section through a second embodiment of the inhalator.

Detailed description of preferred embodiments of the invention

The invention will be illustrated below as adapted to a breath-actuated inhalator intended for administering a solid pharmacologically active compound in micronized form of the general kind described in US-A-4,524,769. The expressions "upper", "lower" etc are only used below with reference to the orientation of the inhalator in for instance Fig 1 and are not to be construed as limiting. As shown in Figs 1 - 3, the inhalator in a first embodiment comprises a housing 1 on which a nozzle 2 is mounted. The housing contains a conduit 3 for conducting ambient air through the housing to the nozzle 2 when the patient inhales through the inhalator. The housing further contains a storage chamber 4 for the micronized compound. The compound is transferred to the air conduit 3 from the storage chamber by means of a rotatable disc or membrane 5 containing conical holes 6. The disc 5 is mounted on a shaft 7 which is journalled in the housing 1. The under side of the disc 5 is provided with a ratchet wheel 8 cooperating with a pawl 9 attached to a rotatable maneuvering wheel 10 journalled onto the

This Sheet Has Been Replaced

This is the replacement sheet
Date: 05 NOV 1996

the wheel 10, and two stops in the form of projections 12, 13 extending downwards from the housing. When the wheel 10 is rotated in one direction from one limit to the other, the ratchet wheel 8, and consequently also the disc 5, will be rotated a distance which is determined by the distance between the stops 12, 13. When the maneuvering wheel is rotated in the other direction the ratchet wheel 8 and the disc 5 will remain stationary. The holes 6 are located in such a way on the disc that there always will be one or several holes 6 which will be located (and consequently will be filled) in the storage chamber 4 at the same time as one or several filled holes 6 are located in the air conduit 3 in one end position of the maneuvering wheel 10. This means that one movement of the maneuvering wheel 10 from one limit position to the other and back will ensure that there will be one or several filled holes 6 in the air conduit 3. When the patient inhales through the nozzle 2, air will be sucked through an air intake 14, through the holes 6 in the air conduit 3 to the nozzle 2, thus entraining the micronized compound in the holes 6 into the respiratory tract of the patient. The nozzle 2 may contain a deaggregating means 15 deaggregating any agglomerations that for instance may have formed when the micronized compound is filled into the holes 6.

When the inhalator has been used, a movement of the maneuvering wheel 10 from one end position to the other and back will, as mentioned above, ensure that a new dose will be located in the air conduit 3.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 05 NOV 1996

of the threads form an oblique angle with the longitudinal direction of the screw whereas the lower flanks 22 of the threads are more or less perpendicularly oriented relative to the longitudinal direction of the screw 16. The nut means is in the form of a tip 17 attached to a resilient arm 20 slideably supported in a guide 23 on the inner wall of the housing 1. In the initial position the major part of the arm 20 extends out from the guide 23. The under side of the tip 17 is oriented to be generally parallel to the upper flanks of the threads and the upper side of the tip 17 is oriented to be generally in parallel to the lower flank of the threads. This results in that the arm 20 and the tip 17 can be slid along the screw in the manner of a ratchet mechanism to any desired position along the upper part of the screw. The tip will however move downwards with the rotation of the screw from any such position. The upper part 18 of the screw 16 is generally cylindrical, whereas the lower part 19 is conical in shape. The pitch of the threads on the cylindrical part 18 of the screw 16 is much finer than the pitch of the threads on the conical part 19.

The upper part of the arm 20 is initially bent inwards, by which means the tip 17 is spring-biased towards the threads of the screw 16.

When the arm 20 moves downwards in the guide 23, an increasing length of the arm will be located in the guide and consequently be bent outwards and fixed against the wall of the housing 1, entailing that the

This Sheet Has Been Replaced



This is the replacement sheet

05 NOV 1996

Date:


The lower end of the screw 16 is provided with cogs 24 which are engagement with cogs 25 on the shaft 7 by means of an intermediate cogwheel 26. A rotation of the disc 5 consequently will result in a rotation of the screw 16 entailing a downward movement of the arm 20. The outer side of the arm 20 is provided with a scale indicating the number of doses still remaining which is visible through a window in the housing provided with an index 27.

A visual indication that the supply of the compound is close to be exhausted can be obtained in that the window is designed with a length which is sufficient to allow the screw to be seen above the arm when the arm comes close to its lower end position. In this case the screw preferably should be made of brightly colored material to indicate exhaustion of available doses.

The lower end 28 of the arm 20 is oriented obliquely relative to the longitudinal direction of the inhalator. The guide 23 is located just before the stop 12 limiting the movement of the lever 11, as seen in the direction of movement of the lever 11 towards the stop 12. A cut out portion 29 in the lower edge of the wall of the housing 1 having a width corresponding to the width of the lever 11 is located adjacent the stop 12 after the stop 12.

Initially, directly after the manufacturing of the inhalator, the nut or tip 17 is located above the threads of the screw 16. By this means the function of

This Sheet Has Been Replaced




This is the replacement sheet

Date: 05 NOV 1996

the indicating means. When the device is filled, the tip 17 is pushed into engagement with the threads of the screw 16. If the full amount of micronized compound possible is to be filled into the storage chamber, the tip 17 is merely pushed downwards into engagement with the uppermost of the threads and the maximum number of doses will be visible in the window. Should it be desirable to fill a smaller amount of micronized powder (i.e. a smaller number of doses), the tip 17 is slid further downwards over the threads, a smaller number of doses then being indicated in the window. This movement of the tip 17 can be performed automatically by means of pins of different lengths which are inserted through a hole in the upper wall of the housing directly above the guide 23, this preferably in conjunction with the filling of the inhalator.

The arm 20 will move downwards at a constant rate in conjunction with the rotation of the disc 5 as long as the tip 17 is located on the upper part 18 of the screw 16. When the tip 17 reaches the conical part 19 of the screw, the downward movement of the tip will accelerate due to the much coarser pitch of the threads on this part and the lower end 28 of the arm 20 will move relatively fast into the path of the lever 11. At its lowest position (corresponding to an almost exhausted storage chamber), the lower end 28 of the arm 20 will function as a slideway for the resilient lever 11 which by this means is lifted over the stop 12 and snaps down into the cut out portion 29 behind the stop 12. The lever can be locked in either the loading or the dispensing position of the carrying means depending on

This Sheet Has Been Replaced

This is the replacement sheet
Date: 05 NOV 1996

giving a clear indication that the inhalator should not be used any more.

An alternative embodiment of the inhalator is shown in Fig 4. The reference signs for parts in Fig 4 being similar to parts in Figs 1 - 3 differ from the reference signs relating to Figs 1 - 3 only in that they are numbered from 100 and upwards. Only the parts being necessary for the understanding of the differences between the two embodiments will be described in connection with Fig 4.

In this embodiment the shaft 107 mounting the rotatable disc 105 is shaped as a hollow sleeve containing the screw 116. The threads on the screw 116 have the same general shape as the threads in the above embodiment although they may have the same pitch over the entire length of the screw. The screw 116 will be oriented upside down relative to the screw 16 in Figs 1 - 3, the sloping flanks of the threads will be facing downwards.

The arm 120 is shaped as a resilient tongue cut longitudinally in the wall of the sleeve 107 with the free end facing downwards and carrying the nut means in the form of a tip 117 projecting into the interior of the sleeve 107. The tip 117 has the general shape of the tip 17 in the above embodiment but is also turned upside down in relation to the tip 17. The pitch of the screw is chosen such that the screw will move downwards when the disc 105 is rotated by means of the ratchet mechanism 108, 109.

This Sheet Has Been Replaced



This is the replacement sheet

05 NOV 1996

Date:

screw will then move downwards from that position when the disc 105 is rotated.

The indicating means are in the form of a bar 132 carrying a scale showing the number of remaining doses through a window 133 and being slideable in a longitudinal guide 123 arranged on the inside of the wall of the housing 101. The bar 132 is rigidly connected to the screw 116 by means of an intermediate bar 131 and will consequently move with the longitudinal movements of the screw 116.

As described above, the screw 116 will move downwards for each rotational movement of the disc 105. When the contents of the storage chamber 104 is nearing exhaustion, the lower end of the screw 116 will engage the resilient lever 111 bending the lever downwards. Since the screw 116 engages the lever relatively close to the attachment point thereof, a relatively small movement of the screw will move the free end of the lever a comparatively large distance. In the end position of the screw, corresponding to an almost exhausted supply of micronized compound, the free end of the lever will be pushed down in an inner groove 130 in a wall portion of the maneuvering wheel 110, which means that the maneuvering wheel can be rotated freely without actuating the rotatable disc 105.

In this way again a clear indication is given that the inhalator is empty and consequently no longer should be used.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 05 NOV 1996

pharmacologically active compounds in a very simple way and which on the other hand gives a clear and unambiguous indication that the compound in the inhalator is exhausted and that the inhalator consequently no longer should be used. The constructive details enabling this are relatively simple and cheap to manufacture.

As mentioned above, the well-defined rotational reciprocal movement of the maneuvering means between two end positions indicate normal movement of said carrying means in connection with dispensing a unit dose into said conduit. The device according to the invention will drastically alter this regularity of the movement, either by locking the maneuvering means or by eliminating one or both of the two end positions of the maneuvering means.

Possible modifications of the invention

It should be noted that the invention of course can be modified in many ways within the scope of the appended claims.

It should for instance be emphasized that, although the maneuvering means and the carrying means in the above preferred embodiments have been illustrated as being two separate parts, it of course also is conceivable to design the maneuvering means as an integral part of the carrying means, e.g. as a knurled portion of the

This Sheet Has Been Replaced



This is the replacement sheet

Date: 05 NOV 1996

located on the housing and the index on the resilient arm 20. The scale can of course be located on hte resilient arm and the index on the housing.

Another possible modification of the dosage inhalator according to the invention is to arrange the threads on the respective component in said screw and nut mechanism in a manner to allow them to be disengaged from each other in order to permit said translational movement.

This Sheet Has Been Replaced

This is the replacement sheet

Date: 05 NOV 1996

pharmacologically active compound suspended in a fluid comprising a nozzle (2), a conduit (3) connected to said nozzle, a storage means (4) adjacent said conduit (3) containing multiple doses of said active compound to be dispensed, a carrying means (5,105) having portions (6) for carrying predetermined and reproducible unit doses of said active compound, said carrying means (5,105) being mounted for movement between said conduit (3) and said storage means (4) to position one of said portions (6) in said conduit (3) whereby said unit dose of said active compound located at said portion (6) can be dispensed into the conduit, said carrying means being actuated by means of a maneuvering means (10, 110),
c h a r a c t e r i z e d in that said inhalator further comprises means (20,117) for disrupting the movement of said maneuvering means (10, 110) directly or indirectly upon exhaustion of said active compound in said storage means (4).

2. Dosage inhalator according to claim 1,
c h a r a c t e r i z e d in that said carrying means (5) is actuated by means of a ratchet mechanism (8,9) including a spring-biased pawl (9) and in that the movement of said ratchet mechanism is limited by means of a lever (11) being reciprocally displaceable between two distinct positions, said means for disrupting the movement of said carrying means placing said lever (11) in a locked state upon exhaustion of said drug in said storage means (4).

This Sheet Has Been Replaced

This is the replacement sheet

05 NOV 1996

Date:

(108,109) including a spring-biased pawl (109), in that the movement of said ratchet mechanism (108,109) is limited by means of a lever (111) being reciprocally displaceable between two distinct positions, said means (117) for disrupting the movement of said maneuvering means freeing said lever upon exhaustion of said drug in said storage means.

4. Dosage inhalator according to any one of the preceding claims, c h a r a c t e r i z e d in that said inhalator further comprises means for indicating the number of doses remaining in said storage means or the number of doses used, said indicating means comprising a screw and nut mechanism (16,17;116,117) being rotated by said intermittent movement of said maneuvering means and/or said carrying means (5,105), the relative movement between screw and nut caused by said rotation being used to interrupt the movement of said maneuvering means (10, 110) after a predetermined number of rotations.

5. A dosage inhalator for dispensing to a patient a pharmacologically active compound suspended in a fluid comprising a nozzle (2), a conduit (3) connected to said nozzle, a storage means (4) adjacent said conduit (3) containing multiple doses of said active compound to be dispensed, a carrying means (5,105) having portions (6) for carrying predetermined and reproducible unit doses of said active compound, said carrying means (5,105) being mounted for intermittent movement between said conduit (3) and said storage

This Sheet Has Been Replaced



This is the replacement sheet

Date: 05 NOV 1996

the conduit, said carrying means being actuated by means of a maneuvering means (10, 110), c h a r a c t e r i z e d in that said inhalator further comprises means for indicating either the number of doses remaining in said storage means or the number of doses used, said indicating means comprising a screw and nut mechanism (16,17;116,117) being rotated by said intermittent movement of said carrying means (5,105), the relative movement between the screw (16,116) and the nut (17,117) in said mechanism being caused by said rotation being used for actuating said indicating means.

6. Dosage inhalator according to claim 5, c h a r a c t e r i z e d in that said relative movement between screw (16,116) and nut (17,117) caused by said rotation is used to disrupt the movement of said maneuvering means directly or indirectly after a predetermined number of rotations.

7. Dosage inhalator according to claim 5, c h a r a c t e r i z e d in that said carrying means (5) is actuated by means of a ratchet mechanism (8,9) including a spring-biased pawl (9), in that the movement of said ratchet mechanism is limited by means of a lever (11) being reciprocally displaceable between two distinct positions, said relative movement between screw (16) and nut (17) being used to move and place said lever (11) in a locked state upon exhaustion of said drug in said storage means (4).

This Sheet Has Been Replaced



This is the replacement sheet

Date: 05 NOV 1996


(108,109) including a spring-biased pawl (109) and in that the movement of said ratchet mechanism (108,109) is limited by means of a lever (111) being reciprocally displaceable between two distinct positions, said relative movement between screw (116) and nut (117) being used to free the reciprocal movement of said lever (111) from being limited by said two distinct positions upon exhaustion of said drug in said storage means (4).

9. Dosage inhalator according to claim 5, c h a r a c t e r i z e d in that said screw and nut mechanism (16,17; 116,117) is provided with a quick adjustment feature allowing a relative translational movement between the screw and the nut facilitating the movement of said indicating means to different positions indicating different amounts of doses.

10. Dosage inhalator according to claim 9, c h a r a c t e r i z e d in that said relative translational movement is achieved automatically by the means used for filling the inhalator in response to the number of doses actually being filled.

11. Dosage inhalator according to claim 10, c h a r a c t e r i z e d in that said translational movement is achieved by means of pins having different lengths acting directly or indirectly upon the screw and nut mechanism by pushing one of the component parts thereof to a position corresponding to the length of the pin in question.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 05 NOV 1996

can be disengaged from each other in order to allow said translational movement.

13. Dosage inhalator according to claim 12, c h a r a c t e r i z e d in that the nut component of said screw and nut mechanism is in the form of one or several resilient biased projections or tips (17, 117) engaging the threads on the screw component (16, 116), one of the flanks of said projections being more obliquely oriented relative to the longitudinal direction of the screw (16, 116) than the other flank in order to allow said projection(s) or tip(s) to be slid easily over the threads on the screw in one longitudinal direction but not in the opposite longitudinal direction in the manner of a ratchet mechanism.

14. Dosage inhalator according to claim 13, c h a r a c t e r i z e d in that the flanks of the threads on the screw (26, 116) engaging said obliquely oriented flank(s) on said projection(s) slope conically in order to facilitate the said sliding movement of said projection(s) or tip(s) one said one longitudinal direction.

15. Dosage inhalator according to any one of claims 13 or 14, c h a r a c t e r i z e d in that projection(s) or tip(s) (17, 117) are located on a resilient arm or lever (20, 120).

This Sheet Has Been Replaced



This is the replacement sheet

Date: 05 NOV 1996

ABSTRACT

The invention relates to a dosage inhalator for dispensing to a patient a pharmacologically active compound or substance suspended in a fluid comprising a nozzle (2), a conduit (3) connected to said nozzle, a storage means (4) adjacent said conduit (3) containing multiple doses of said active compound to be dispensed, a carrying means (5) having portions (6) for carrying predetermined and reproducible unit doses of said active compound, said carrying means being mounted for movement between said conduit (3) and said storage means (4) to position one of said portions (6) in said conduit (3) whereby said unit dose of said active compound located at said portion (6) can be dispensed into the conduit, said carrying means being actuated by means of a maneuvering means (10, 110). The inhalator further comprises means (20,) for disrupting the movement of said maneuvering means (10, 110) directly or indirectly upon exhaustion of said active compound in said storage means (4).

Fig 1.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 05 NOV 1996

FIG 1


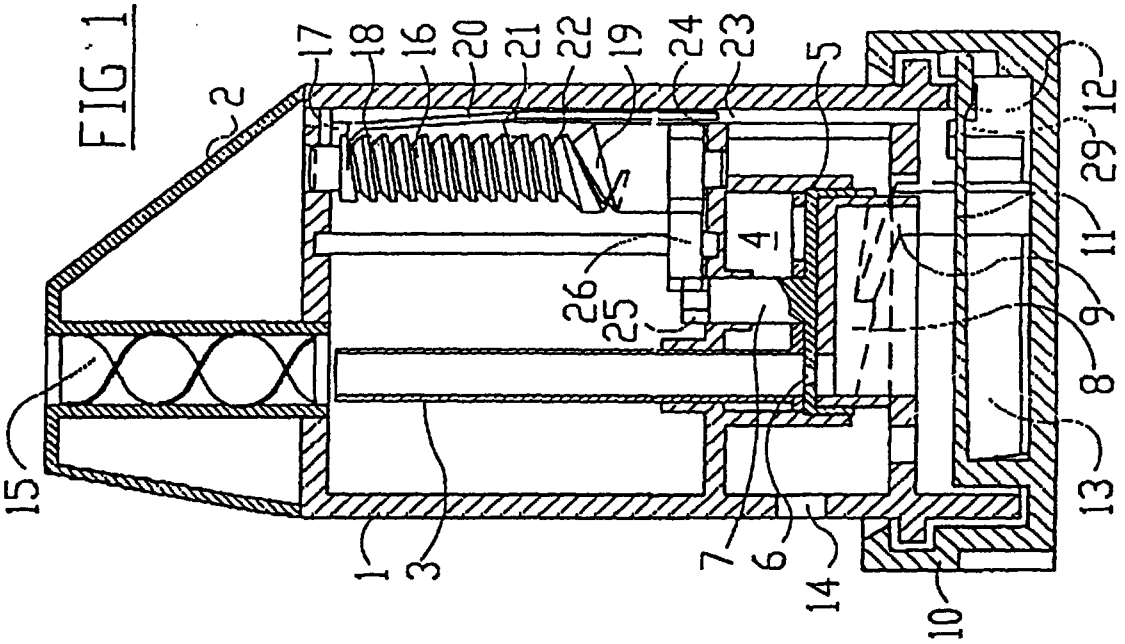


FIG 2

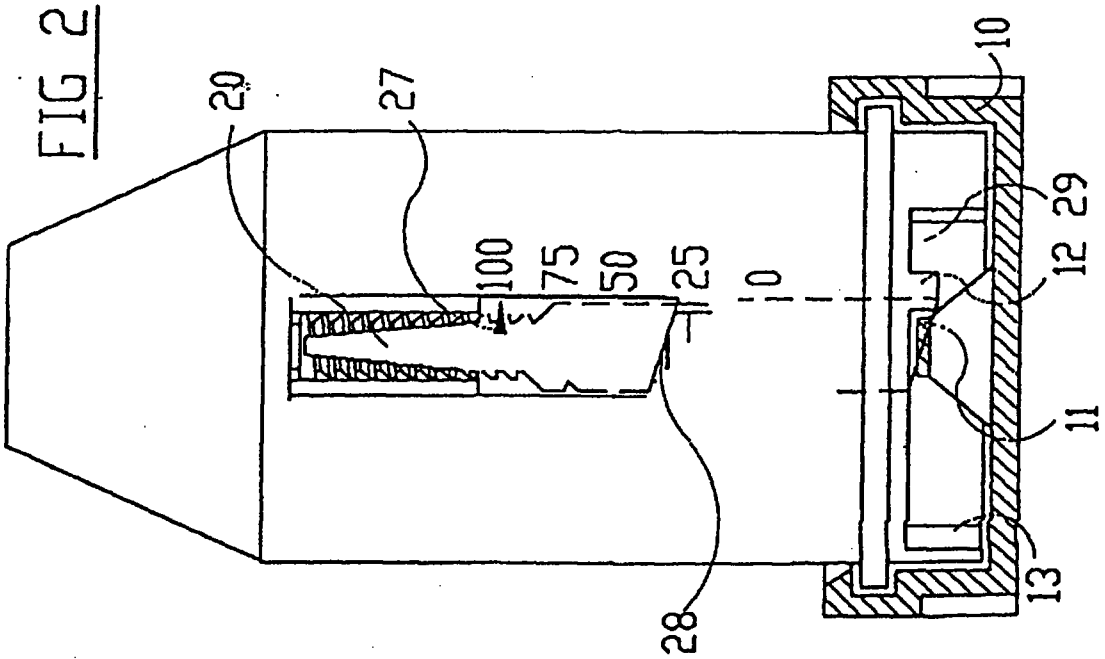

This Sheet Has Been Replaced

This is the replacement sheet

Date: 05 NOV 1996

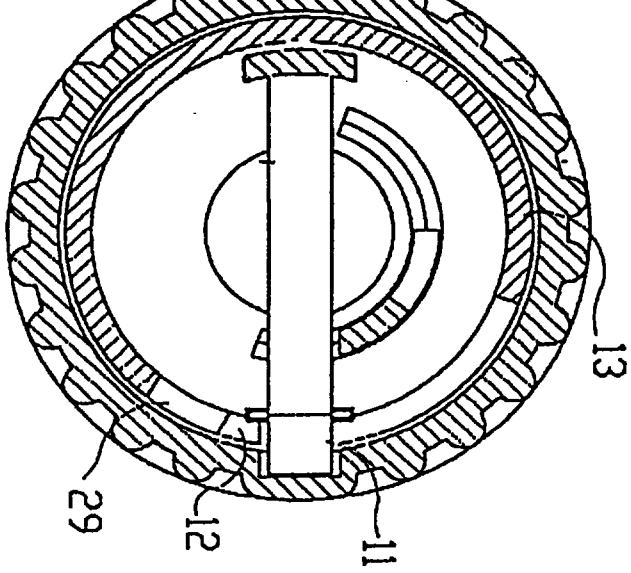


FIG 3

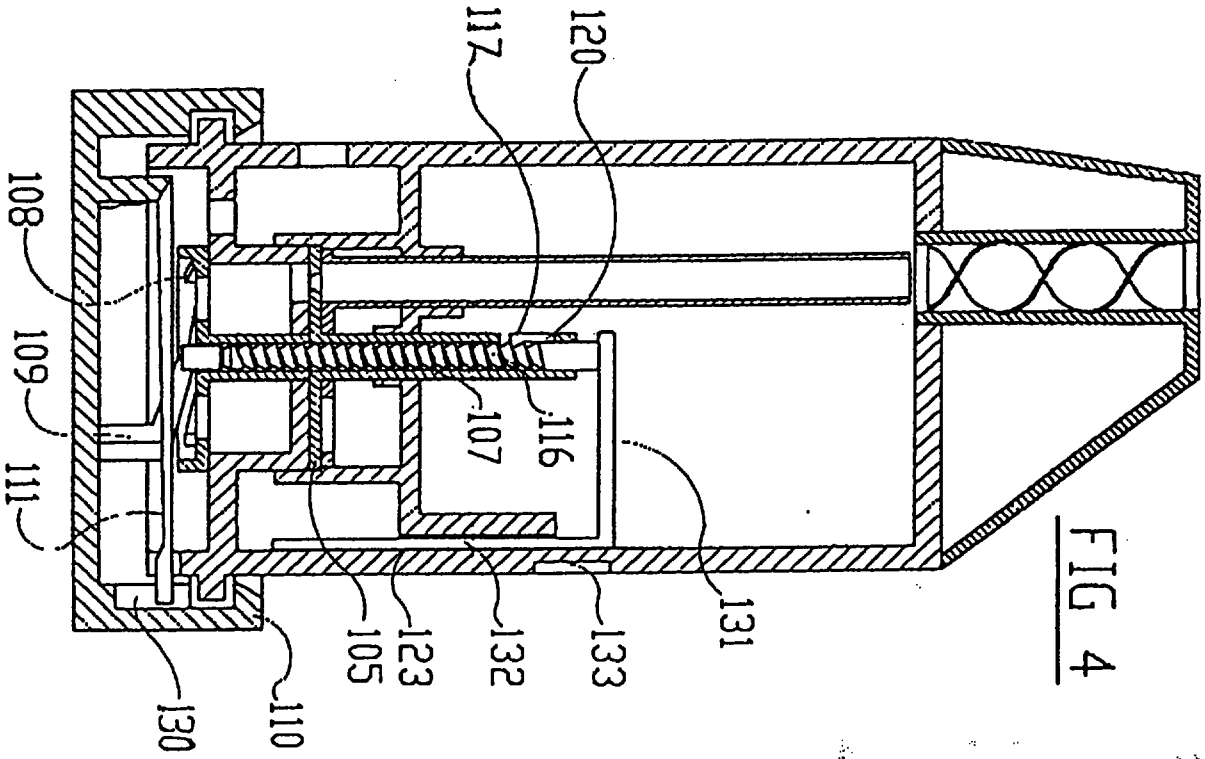


FIG 4

This Sheet Has Been Replaced

This is the replacement sheet

0 5 NOV 1996

Date:

pharmacologically active compound or substance suspended in a fluid.

Dosage inhalators of this general kind are disclosed for instance in US-A-4524769, which is directed towards a dosing means in a dosage inhalator, and US-A-4668218, which is directed towards an indicating means for indicating the number of doses used or remaining in a dosage inhalator. In some cases, it may, however, be advantageous for a patient additionally to be given a clear and unambiguous indication that the supply of active compound or substance is exhausted. It further is desirable to provide a dosage inhalator with an indicating means having a design which is simple and cheap to manufacture and which can be set automatically to correspond to the actual number of doses filled into the dosage inhalator.

Accordingly, the present invention provides a dosage inhalator for dispensing to a patient a pharmacologically active compound or substance suspended in a fluid, comprising a nozzle, a conduit connected to said nozzle, a storage means adjacent said conduit for storing a plurality of doses of said active compound or substance to be dispensed, a carrying means having portions for carrying predetermined and reproducible unit doses of said active compound or substance from said storage means to said conduit, said carrying means being actuated by means of a ratchet mechanism including a spring-biased pawl and mounted for intermittent movement to deliver one of said portions to said conduit, whereby said unit dose of said active compound or substance located at said portion can be dispensed into said conduit, and a manoeuvering means for actuating said intermittent movement of said carrying means; characterized in that said dosage inhalator further comprises means for disrupting the movement of said manoeuvering means directly or indirectly upon exhaustion of said active compound or substance from said storage means, said manoeuvering means includes a lever which is reciprocally displaceable between two distinct positions, and operation of said ratchet mechanism is limited by said displacement of said lever.

This Sheet Has Been Replaced



REPLACEMENT SHEETS SG
☑ Description : paged 1. to paged 9.
☐ Claim(s) : paged 10 to paged 12
☑ Drawing(s) : paged 1 to paged 2
☐ Abstract : paged 13 to paged
DATE OF RECEIPT 6/12/97

patient is given a clear indication that the supply of active compound or substance is exhausted.

In one embodiment said means for disrupting the movement of said manoeuvering means places said lever in a locked state upon exhaustion of said active compound or substance from said storage means.

In another embodiment said means for disrupting the movement of said manoeuvering means causes said lever to be able to move freely beyond said two distinct positions upon exhaustion of said active compound or substance from said storage means.

Preferably, said dosage inhalator further comprises means for indicating the number of doses remaining in said storage means or the number of doses used, said indicating means comprising a screw and nut mechanism including a screw and a nut that are moved relative to one another on intermittent movement of said carrying means, the relative movement of said screw and said nut being used to actuate said means for disrupting the movement of said manoeuvering means after a predetermined number of said intermittent movements.

More preferably, said screw and nut mechanism is provided with a quick adjustment feature allowing a realtive translational movement between said screw and said nut which produces a corresponding movement of said indicating means to a position indicating a predetermined number of doses present in said storage means.

Still more preferably, said relative translational movement is achieved automatically by the means used for filling said dosage inhalator in response to the number of doses actually being filled.

Yet more preferably, said translational movement is achieved by means of pins of different length acting directly or indirectly upon said screw and nut mechanism by pushing one of

This Sheet Has Been Replaced



This is the replacement sheet

Date: 08 DEC 1997

Preferably, the threads on said screw and said nut can be disengaged from each other in order to allow said translational movement.

More preferably, said nut is a resilient biased projection which engages the threads on said screw, one of the flanks of said projection being more obliquely oriented relative to the longitudinal axis of said screw than the other flank in order to allow said projection to slide easily over the threads on said screw in one longitudinal direction but not in the opposite longitudinal direction in the manner of a ratchet mechanism.

Still more preferably, the flanks of the threads on said screw which engage said obliquely oriented flank on said projection slope conically in order to facilitate said sliding movement of said projection in said one longitudinal direction.

Preferably, said projection is located on a resilient arm.

Preferably said nut includes a plurality of projections.

Preferred embodiments of the present invention will now be described hereinbelow by way of example only with reference to the accompanying drawings, in which:

Figure 1 illustrates a longitudinal section through a dosage inhalator in accordance with a first embodiment of the present invention,

Figure 2 illustrates a part-sectional longitudinal view of the dosage inhalator of Figure 1,

Figure 3 illustrates a diametric section through a lower part of the dosage inhalator of Figure 1, and

Figure 4 illustrates a longitudinal section through a dosage inhalator in accordance with a second embodiment of the present invention.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 08 DEC 1997

understood that in this specification the expressions "upper", "lower", etc are used only with reference to the orientation of the dosage inhalators as illustrated and are not to be construed as limiting.

As illustrated in Figures 1 to 3, a dosage inhalator in accordance with a first embodiment of the present invention comprises a housing 1, a nozzle 2 attached to one end of the housing 1 and a rotatable manoeuvering wheel 10 journalled to the other end of the housing 1.

The housing 1 includes a conduit 3 for conducting ambient air therethrough to the nozzle 2 as a patient inhales, a storage chamber 4 for storing active compound or substance and a rotatable disc 5 for transferring the active compound or substance to the conduit 3 from the storage chamber 4. The disc 5 may be in the form of a membrane and includes one or more tapered holes 6. The disc 5 is mounted to a shaft 7 which is journalled in the housing 1 and is provided with cogs 25 at the upper end thereof. The under side of the disc 5 is provided with a ratchet wheel 8 which cooperates with a pawl 9 attached to the manoeuvering wheel 10. Movement of the manoeuvering wheel 10 relative to the housing 1 is limited by means of a lever 11 which is attached to the manoeuvering wheel 10, and first and second projections 12, 13 which act as stops that extend downwards from the wall of the housing 1. When the manouvering wheel 10 is rotated in one sense so as to move the lever 11 from the first projection 12 to the second projection 13, the ratchet wheel 8, and hence the disc 5, are rotated through an angular distance which corresponds to the angular distance between the projections 12, 13. When the manoeuvering wheel 10 is rotated back in the opposite sense so as to move the lever 11 from the second projection 13 to the first projection 12 the ratchet wheel 8, and hence the disc 5, remain stationary. The holes 6 are arranged in the disc 5 such that one or more holes 6 are located (and consequently filled) at the storage chamber 4 at the same time as one or more filled holes 6 are located at the conduit 3. Accordingly, movement of the manoeuvering wheel 10 from one stop to the other and back ensures that one or more filled holes 6 are located at the conduit 3. When a patient inhales through the nozzle 2, air will be sucked through an air intake 14, and through the one or

This Sheet Has Been Replaced



This is the replacement sheet

Date: 08 DEC 1997

the other end back, provides, as mentioned above, a new dose at the conduit 5.

In this embodiment the nozzle 2 includes a deaggregating means 15 for deaggregating any agglomerates, particularly those which form when the active compound or substance is filled into the one or more holes 6.

The dosage inhalator further comprises an indicating means for indicating the number of doses remaining in the storage chamber 4 comprising a screw 16 and a nut 17. The screw 16 comprises an upper threaded part 18 and a lower threaded part 19. The upper threaded part 18 of the screw 16 is generally clylindrical, whereas the lower threaded part 19 of the screw 16 is conical. In addition, the pitch of the threads on the upper threaded part 18 of the screw 16 is much finer than the pitch of the threads on the lower threaded part 19 of the screw 16. The upper flanks 21 of the threads on the screw 16 form an oblique angle with the longitudinal axis of the screw 16, whereas the lower flanks 22 of the threads on the screw 16 are more or less perpendicularly oriented relative to the longitudinal axis of the screw 16. In this embodiment the nut 17 is a projection that extends from a resilient arm 20 that is slideably supported in a guide 23 at the inner wall of the housing 1. Before use of the dosage inhalator, a major part of the arm 20 is located outside of the guide 23 and an upper part of the arm 20 is bent inwards tending to bias the nut 17 towards the threads on the screw 16. With use, as the arm 20 moves downwards, an increasing length of the arm 20 is located in the guide 23 and consequently bent outwards and fixed against the wall of the housing 1, entailing that the arm 20 becomes increasingly less resilient, with the consequence that the nut 17 is held more and more fixedly relative to the screw 16. The under side of the nut 17 is oriented to be generally parallel to the upper flanks of the threads on the screw 16 and the upper side of the nut 17 is oriented to be generally parallel to the lower flanks of the threads on the screw 16. Thus, the nut 17 can be slid over the screw 16 in the manner of a ratchet mechanism to any desired position along the upper threaded part 18 of the screw 16. With use of the dosage inhalator, the nut 17 moves downwards on rotation of the screw 16 from any such position.

This Sheet Has Been Replaced



This is the replacement sheet


Date: 0 8 DEC 1997

the outlet and back, provides, as mentioned above, a new dose at the conduit 5.

In this embodiment the nozzle 2 includes a deaggregating means 15 for deaggregating any agglomerates, particularly those which form when the active compound or substance is filled into the one or more holes 6.

The dosage inhalator further comprises an indicating means for indicating the number of doses remaining in the storage chamber 4 comprising a screw 16 and a nut 17. The screw 16 comprises an upper threaded part 18 and a lower threaded part 19. The upper threaded part 18 of the screw 16 is generally clylindrical, whereas the lower threaded part 19 of the screw 16 is conical. In addition, the pitch of the threads on the upper threaded part 18 of the screw 16 is much finer than the pitch of the threads on the lower threaded part 19 of the screw 16. The upper flanks 21 of the threads on the screw 16 form an oblique angle with the longitudinal axis of the screw 16, whereas the lower flanks 22 of the threads on the screw 16 are more or less perpendicularly oriented relative to the longitudinal axis of the screw 16. In this embodiment the nut 17 is a projection that extends from a resilient arm 20 that is slideably supported in a guide 23 at the inner wall of the housing 1. Before use of the dosage inhalator, a major part of the arm 20 is located outside of the guide 23 and an upper part of the arm 20 is bent inwards tending to bias the nut 17 towards the threads on the screw 16. With use, as the arm 20 moves downwards, an increasing length of the arm 20 is located in the guide 23 and consequently bent outwards and fixed against the wall of the housing 1, entailing that the arm 20 becomes increasingly less resilient, with the consequence that the nut 17 is held more and more fixedly relative to the screw 16. The under side of the nut 17 is oriented to be generally parallel to the upper flanks of the threads on the screw 16 and the upper side of the nut 17 is oriented to be generally parallel to the lower flanks of the threads on the screw 16. Thus, the nut 17 can be slid over the screw 16 in the manner of a ratchet mechanism to any desired position along the upper threaded part 18 of the screw 16. With use of the dosage inhalator, the nut 17 moves downwards on rotation of the screw 16 from any such position.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 0 8 DEC 1997


of the arm 20. In this embodiment the outer side of the arm 20 is provided with a pointer 27 which is visible through a window in the housing 1 and the housing 1 is provided with a scale. With use of the dosage inhalator, the arm 20 and hence the pointer 27 is moved relative to the scale and the number of doses remaining is indicated.

A visual indication that the supply of active compound or substance is close to exhaustion can be obtained in that the window has a length which is sufficient to allow the screw 16 to be seen above the arm 20 when the arm 20 is near a lower end position. In this embodiment the screw 16 is made of brightly coloured material to indicate near exhaustion of avaliable doses.

In use, the arm 20 moves downwards at a constant rate on rotation of the disc 5 when the nut 17 is located on the upper threaded part 18 of the screw 16. However, when the nut 17 reaches the lower threaded part 19 of the screw 16, at which point the storage chamber 4 is nearly exhausted of active compound or substance, the arm 20 moves increasingly rapidly downwardly owing to the much coarser pitch of the threads on that part of the screw 16.

In the manufacture of the dosage inhalator, the nut 17 is located above the threaded parts 18, 19 of the screw 16. In this way the function of the disc 5 and the associated components can be tested before filling the storage chamber 4. After the storage chamber 4 has been filled, the nut 17 is pushed into engagement with the upper threaded part 18 of the screw 16. If the storage chamber 4 is completely filled with active compound or substance, the nut 17 is merely pushed downwards into engagement with the uppermost thread of the upper threaded part 18 of the screw 16 and the maximum number of available doses will be indicated. If, however, the storage chamber 4 is filled with a lesser amount of active compound or substance (i.e., a fewer number of doses), the nut 17 is slid further downwards over the upper threaded part 18 of the screw 16, a lesser number of available doses then being indicated. This movement of the nut 17 can be performed automatically by inserting pins of different length through a hole in the upper wall of the housing 1

This Sheet Has Been Replaced



This is the replacement sheet

Date: 0 8 DEC 1997

manoeuvering wheel 10 upon exhaustion of active compound or substance from the storage chamber 4. In this embodiment disruption of the manoeuvering wheel 10 is provided by the lever 11 which is acted upon by the arm 20 to locate the lever 11 immovably in a cut-out portion 29. The cut-out portion 29, which has a width corresponding to the width of the lever 11, is located in the lower edge of the wall of the housing 1 adjacent but rotationally beyond the first projection 12. As mentioned hereinabove, when the storage chamber 4 is nearly exhausted of active compound or substance, the nut 17 is located on the lower threaded part 19 of the screw 16 and the arm 20 moves rapidly downwardly on rotation of the screw 16. At this point the lower end 28 of the arm 20 moves into the path of the lever 11; the guide 23 being located rotationally immediately before the first projection 12. At the lowest position (corresponding to near exhaustion of the storage chamber 4), the lower end 28 of the arm 20, which is oriented obliquely relative to the longitudinal axis of the dosage inhalator, functions as a slideway for the resilient lever 11. The slideway provided by the lower end 28 of the arm 20 causes the lever 11 to be lifted over the first projection 12 and the lever 11 snaps down into the cut-out portion 29 beyond the first projection 12. It will be understood that the lever 11 can be locked either on loading or dispensing depending upon whether the cut-out portion 29 is located adjacent the first projection 12, as in this embodiment, or the second projection 13. In this way the maneuvering wheel 10 becomes locked upon exhaustion of active compound or substance, giving a clear indication that the dosage inhalator cannot be used further.

A dosage inhalator in accordance with a second embodiment of the present invention is illustrated in Figure 4. In order to avoid unnecessary duplication of description, the reference signs of the parts of the dosage inhalator of this embodiment which are the same or similar to those in the above-described embodiment will be numbered correspondingly but from 100 upwards, and only the differences in the two embodiments will be described.

In this embodiment the shaft 107 to which the rotatable disc 105 is mounted is formed as a hollow sleeve which receives the screw 116. The threads on the screw 116 have the same

This Sheet Has Been Replaced



This is the replacement sheet

Date: 0 8 DEC 1997

In this embodiment the arm 120 is a resilient tongue formed longitudinally in the wall of the shaft 107; with the free end of the tongue facing downwards and including a projection which faces radially inwardly and defines the nut 117. The nut 117 has the same general shape as the nut 17 in the above-described embodiment but is also inverted relative thereto. The pitch of the threads on the screw 116 is chosen such that the screw 116 will move downwards when the disc 105 is rotated by means of the ratchet mechanism provided by the ratchet wheel 108 and the pawl 109. In addition, in a similar manner to the above-described embodiment, the screw 116 can be pushed down into the shaft 107 to any desired position corresponding to a predetermined number of doses. Once set, the screw 116 will then move downwards from that position as the disc 105 is rotated.

In this embodiment the indicating means comprises a bar 132 which includes a scale that indicates the number of doses remaining and is slideable in a longitudinal guide 123 arranged on the inside of the wall of the housing 101. As in the above-described embodiment the housing 101 includes a window through which the scale is visible. The bar 132 is rigidly connected to the screw 116 by an interconnecting element 131 and is moved downwardly on rotation of the disc 105.

As described hereinabove, the screw 116 moves downwards with each rotational movement of the disc 105. When the storage chamber 104 is nearly exhausted of active compound or substance, the lower end of the screw 116 engages the resilient lever 111 and causes the lever 111 to be bent downwards. Since the screw 116 engages the lever 111 near to the attachment point thereof, a relatively small movement of the screw 116 moves the free end of the lever 111 a comparatively large distance. In the end position of the screw 116, corresponding to near exhaustion of active compound or substance from the storage chamber 104, the free end of the lever 111 is pushed down into an inner circumferential groove 130 formed in a wall portion of the maneuvering wheel 110, thereby allowing the maneuvering wheel 110 to be rotated freely without actuating the disc

This Sheet Has Been Replaced

This is the replacement sheet

0 8 DEC 1997

Date:

Thus, a dosage inhalator is provided having an indicating means which on one hand can easily be set to show different numbers of doses of active compound or substance and which on the other hand gives a clear and unambigous indication that the active compound or substance in the dosage inhalator is exhausted and that the dosage inhalator consequently cannot be used further. Furhermore, this dosage inhalator is relatively simple and cheap to manufacture.

Finally, it will be understood that the present invention is not limited to the described embodiments, but can be modified in many different ways within the scope of the appended claims.

For instance, although the manoeuvering wheel 10, 110 and the disc 5, 105 in the above-described embodiments are separate parts, it is envisaged that the manoeuvering wheel 10, 110 and the disc 5, 105 could be formed as a single component. For example, the manoeuvering wheel 10, 110 could be provided as a knurled portion of the disc 5, 105 which extends through a circumferential slot in the housing 1, 101.

Furthermore, it is envisaged that the scale could be included on either the housing 1, 101 or one of the arm 20 and the bar 132, with the pointer on the other of the housing 1, 101 or one of the arm 20 and the bar 132.

Another possible modification of the above-described embodiments is to arrange the threads on the screw 16, 116 and the nut 17, 117 to allow those parts to be disengaged from each other in order to permit translational movement.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 08 DEC 1997

substance suspended in a fluid, comprising a nozzle (2), a conduit (3) connected to said nozzle (2), a storage means (4) adjacent said conduit (3) for storing a plurality of doses of said active compound or substance to be dispensed, a carrying means (5; 105) having portions (6) for carrying predetermined and reproducible unit doses of said active compound or substance from said storage means (4) to said conduit (3), said carrying means (5; 105) being actuated by means of a ratchet mechanism including a spring-biased pawl (9; 109) and mounted for intermittent movement to deliver one of said portions (6) to said conduit (3), whereby said unit dose of said active compound or substance located at said portion (6) can be dispensed into said conduit (3), and a manoeuvering means (10; 110) for actuating said intermittent movement of said carrying means (5; 105); characterized in that said dosage inhalator further comprises means for disrupting the movement of said manoeuvering means (10; 110) directly or indirectly upon exhaustion of said active compound or substance from said storage means (4), said manoeuvering means (10; 110) includes a lever (11; 111) that is reciprocally displaceable between two distinct positions, and operation of said ratchet mechanism is limited by said displacement of said lever (11; 111).

2. A dosage inhalator according to claim 1, wherein said means for disrupting the movement of said manoeuvering means (10) places said lever (11) in a locked state upon exhaustion of said active compound or substance from said storage means (4).

3. A dosage inhalator according to claim 1, wherein said means for disrupting the movement of said manoeuvering means (110) causes said lever (111) to be able to move freely beyond said two distinct positions upon exhaustion of said active compound or substance from said storage means (4).

4. A dosage inhalator according to any of claims 1 to 3, further comprising means for indicating the number of doses remaining in said storage means (4) or the number of doses used, said indicating means comprising a screw and nut mechanism including a screw (16; 116) and a nut (17; 117) that are moved relative to one another on

This Sheet Has Been Replaced



This is the replacement sheet

Date: 08 DEC 97

5. A dosage inhalator according to claim 4, wherein said screw and nut mechanism is provided with a quick adjustment feature allowing a realtive translational movement between said screw (16; 116) and said nut (17; 117) which produces a corresponding movement of said indicating means to a position indicating a predetermined number of doses present in said storage means (4).

6. A dosage inhalator according to claim 5, wherein said relative translational movement is achieved automatically by the means used for filling said dosage inhalator in response to the number of doses actually being filled.

7. A dosage inhalator according to claim 6, wherein said translational movement is achieved by means of pins of different length acting directly or indirectly upon said screw and nut mechanism by pushing one of said screw (16; 116) or said nut (17; 117) thereof to a position corresponding to the length of the pin in question.

8. A dosage inhalator according to any of claims 5 to 7, wherein the threads on said screw (16; 116) and said nut (17; 117) can be disengaged from each other in order to allow said translational movement.

9. A dosage inhalator according to claim 8, wherein said nut (17; 117) is a resilient biased projection which engages the threads on said screw (16; 116), one of the flanks of said projection being more obliquely oriented relative to the longitudinal axis of said screw (16; 116) than the other flank in order to allow said projection to slide easily over the threads on said screw (16; 116) in one longitudinal direction but not in the opposite longitudinal direction in the manner of a ratchet mechanism.

10. A dosage inhalator according to claim 9, wherein the flanks of the threads on said screw (16; 116) which engage said obliquely oriented flank on said projection slope

This Sheet Has Been Replaced



This is the replacement sheet

Date: 08 DEC 1997

11. A dosage inhalator according to claim 9 or 10, wherein said projection is located on a resilient arm (20; 120).

12. A dosage inhalator according to any of claims 9 to 11, wherein said nut (17; 117) includes a plurality of projections.

This Sheet Has Been Replaced

This is the replacement sheet

Date: 08 DEC 1997

ABSTRACT

The invention relates to a dosage inhalator for dispensing to a patient a pharmacologically active compound or substance suspended in a fluid comprising a nozzle (2), a conduit (3) connected to said nozzle, a storage means (4) adjacent said conduit (3) containing multiple doses of said active compound to be dispensed, a carrying means (5) having portions (6) for carrying predetermined and reproducible unit doses of said active compound, said carrying means being mounted for movement between said conduit (3) and said storage means (4) to position one of said portions (6) in said conduit (3) whereby said unit dose of said active compound located at said portion (6) can be dispensed into the conduit, said carrying means being actuated by means of a maneuvering means (10, 110). The inhalator further comprises means (20,) for disrupting the movement of said maneuvering means (10, 110) directly or indirectly upon exhaustion of said active compound in said storage means (4).

Fig 1.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 0 8 DEC 1997

FIG 1


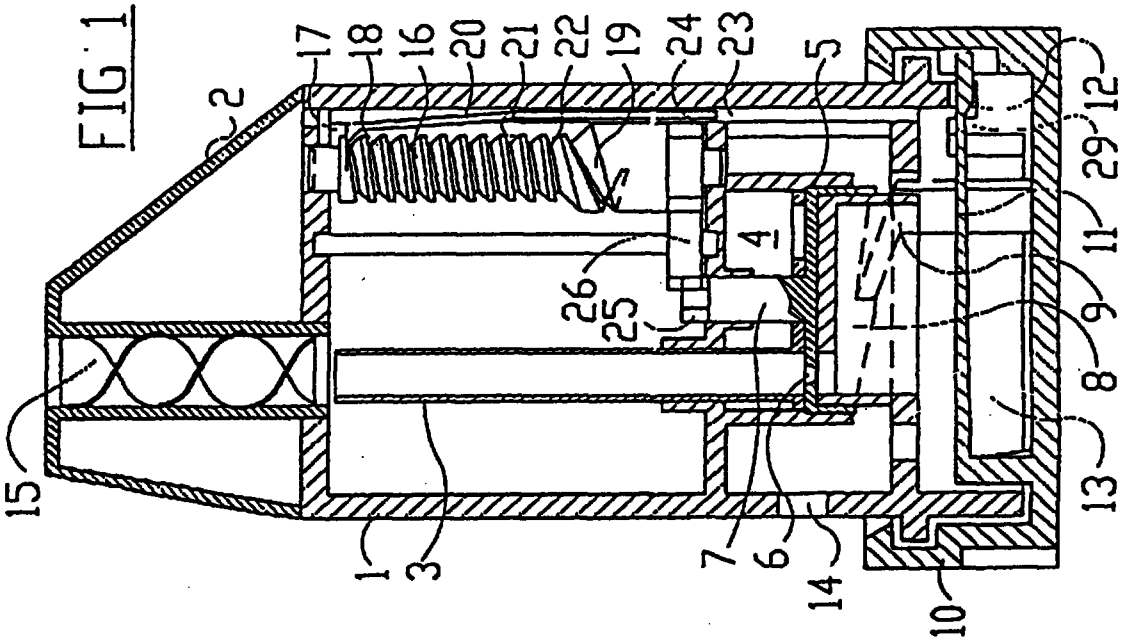


FIG 2

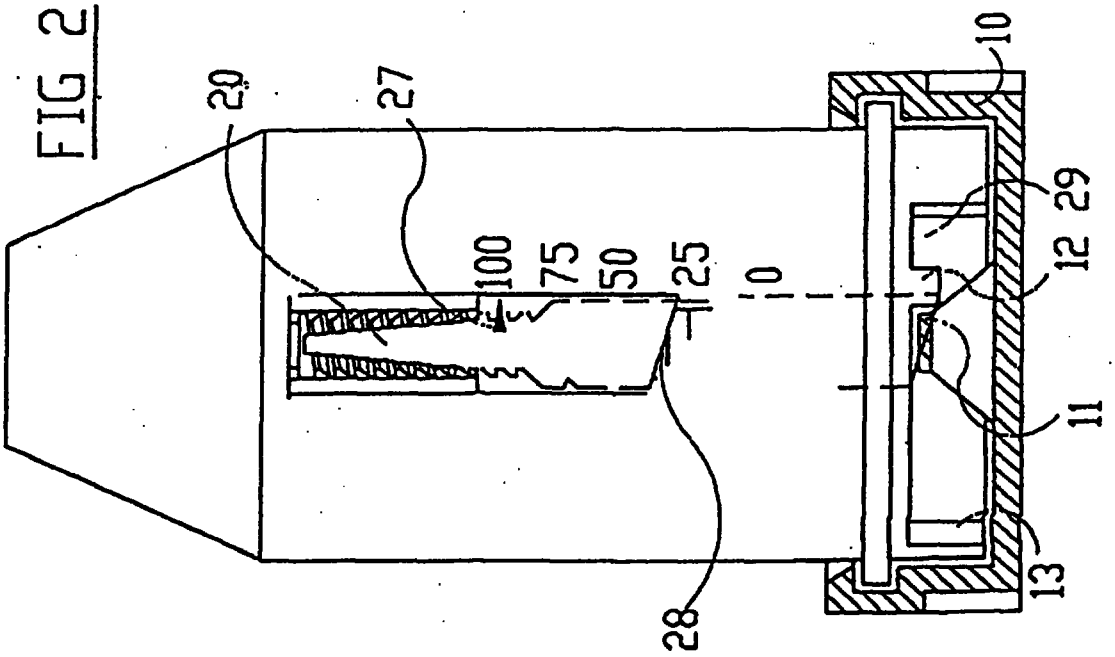


This Sheet Has Been Replaced

This is the replacement sheet

Date: 08 DEC 1987

FIG 4

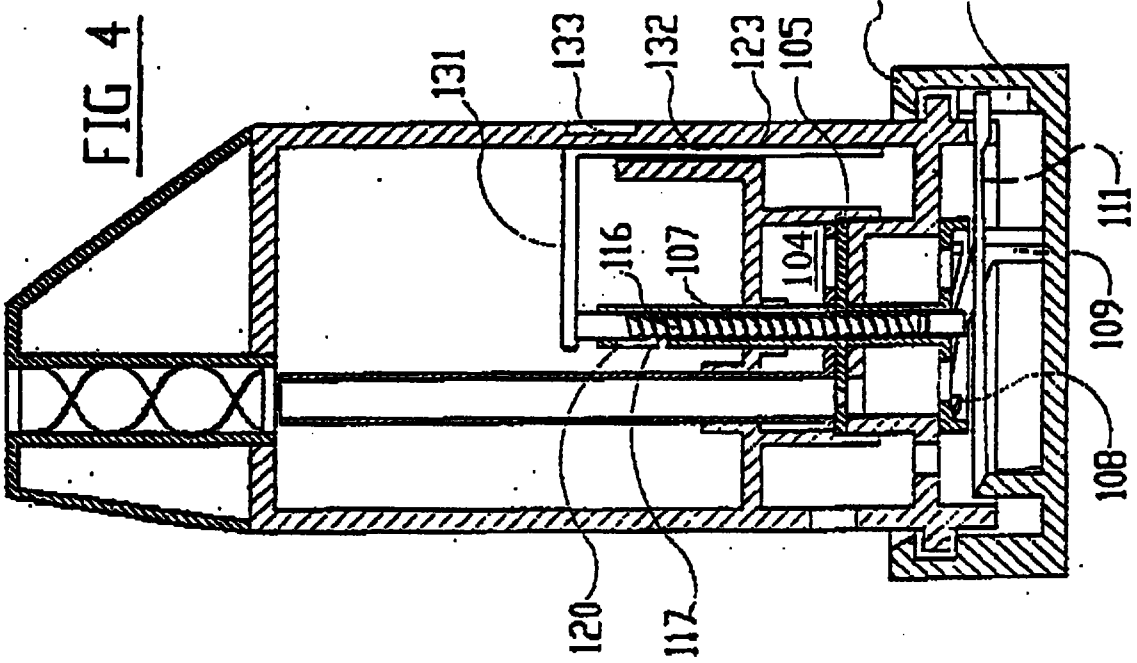

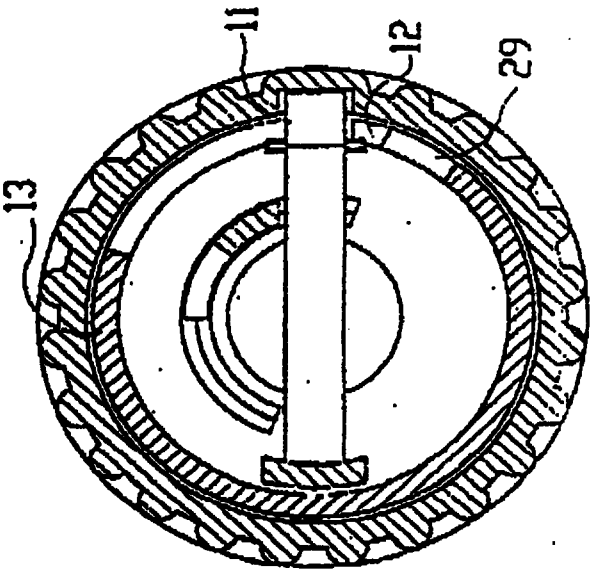


FIG 3

This Sheet Has Been Replaced



This is the replacement sheet

Date: 0 8 DEC 1997

Dosage inhalators of this general kind are disclosed for instance in US-A-4524769, which is directed towards a dosing means in a dosage inhalator, and US-A-4668218. which is directed towards an indicating means for indicating the number of doses used or remaining in a dosage inhalator. In some cases, it may. however. be advantageous for a patient additionally to be given a clear and unambiguous indication that the supply of active compound or substance is exhausted. It further is desirable to provide a dosage inhalator with an indicating means having a design which is simple and cheap to manufacture and which can be set automatically to correspond to the actual number of doses filled into the dosage inhalator.

Accordingly. the present invention provides a dosage inhalator for dispensing to a patient a pharmacologically active compound or substance suspended in a fluid. comprising a nozzle. a conduit connected to said nozzle, storage means adjacent said conduit for storing a plurality of doses of said active compound or substance to be dispensed, carrying means having portions for carrying predetermined and reproducible unit doses of said active compound or substance from said storage means to said conduit. said carrying means being actuated by means of a ratchet mechanism including a spring-biased pawl and mounted for intermittent movement to deliver one of said portions to said conduit. whereby said unit dose of said active compound or substance located at said portion can be dispensed into said conduit, and manoeuvering means for actuating said intermittent movement of said carrying means: characterized in that said dosage inhalator further comprises disrupting means for disrupting, in the sense to cause to break down, the normal movement of said manoeuvering means upon exhaustion of said active compound or substance from said storage means, said manoeuvering means including a lever which in the normal movement is reciprocally displaceable between two distinct positions, and operation of said ratchet mechanism is limited by said displacement of said lever.

This is the replacement sheet

Date: 19 FEB 1999

exhausted.

In one embodiment said disrupting means for disrupting the normal movement of said manoeuvering means places said lever in a locked state upon exhaustion of said active compound or substance from said storage means.

In another embodiment said disrupting means for disrupting the normal movement of said manoeuvering means causes said lever to be able to move freely beyond said two distinct positions upon exhaustion of said active compound or substance from said storage means.

Preferably, said dosage inhalator further comprises indicating means for indicating the number of doses remaining in said storage means or the number of doses used, said indicating means comprising a screw and nut mechanism including a screw and a nut that are moved relative to one another on intermittent movement of said carrying means, the relative movement of said screw and said nut being used to actuate said disrupting means for disrupting the normal movement of said manoeuvering means after a predetermined number of said intermittent movements.

More preferably, said screw and nut mechanism is provided with a quick adjustment feature allowing a relative translational movement between said screw and said nut which produces a corresponding movement of said indicating means to a position indicating a predetermined number of doses present in said storage means.

Still more preferably, said relative translational movement is achieved automatically by the means used for filling said dosage inhalator in response to the number of doses actually being filled.

Yet more preferably, said translational movement is achieved by means of pins of different length acting directly or indirectly upon said screw and nut mechanism by pushing one of

This is the replacement sheet
19 FEB 1999
Date:

order to allow said translational movement.

More preferably, said nut is a resilient biased projection which engages the threads on said screw, one of the flanks of said projection being more obliquely oriented relative to the longitudinal axis of said screw than the other flank in order to allow said projection to slide easily over the threads on said screw in one longitudinal direction but not in the opposite longitudinal direction in the manner of a ratchet mechanism.

Still more preferably, the flanks of the threads on said screw which engage said obliquely oriented flank on said projection slope conically in order to facilitate said sliding movement of said projection in said one longitudinal direction.

Preferably, said projection is located on a resilient arm.

Preferably, said nut includes a plurality of projections.

Preferred embodiments of the present invention will now be described hereinbelow by way of example only with reference to the accompanying drawings, in which:

Figure 1 illustrates a longitudinal section through a dosage inhalator in accordance with a first embodiment of the present invention,

Figure 2 illustrates a part-sectional longitudinal view of the dosage inhalator of Figure 1.

Figure 3 illustrates a diametric section through a lower part of the dosage inhalator of Figure 1. and

Figure 4 illustrates a longitudinal section through a dosage inhalator in accordance with a second embodiment of the present invention.

This is the replacement sheet
Date: 19 FEB 1999

understood that in this specification the expressions "upper", "lower", etc are used only with reference to the orientation of the dosage inhalators as illustrated and are not to be construed as limiting.

As illustrated in Figures 1 to 3, a dosage inhalator in accordance with a first embodiment of the present invention comprises a housing 1, a nozzle 2 attached to one end of the housing 1 and a rotatable manoeuvering wheel 10 journalled to the other end of the housing 1.

The housing 1 includes a conduit 3 for conducting ambient air therethrough to the nozzle 2 as a patient inhales. a storage chamber 4 for storing active compound or substance and a rotatable disc 5 for transferring the active compound or substance to the conduit 3 from the storage chamber 4. The disc 5 may be in the form of a membrane and includes one or more tapered holes 6. The disc 5 is mounted to a shaft 7 which is journalled in the housing 1 and is provided with cogs 25 at the upper end thereof. The under side of the disc 5 is provided with a ratchet wheel 8 which cooperates with a pawl 9 attached to the manoeuvering wheel 10. Movement of the manoeuvering wheel 10 relative to the housing 1 is limited by means of a lever 11 which is attached to the manoeuvering wheel 10, and first and second projections 12, 13 which act as stops that extend downwards from the wall of the housing 1. When the manouvering wheel 10 is rotated in one sense so as to move the lever 11 from the first projection 12 to the second projection 13, the ratchet wheel 8, and hence the disc 5, are rotated through an angular distance which corresponds to the angular distance between the projections 12, 13. When the manoeuvering wheel 10 is rotated back in the opposite sense so as to move the lever 11 from the second projection 13 to the first projection 12 the ratchet wheel 8. and hence the disc 5, remain stationary. The holes 6 are arranged in the disc 5 such that one or more holes 6 are located (and consequently filled) at the storage chamber 4 at the same time as one or more filled holes 6 are located at the conduit 3. Accordingly, movement of the manoeuvering wheel 10 from one stop to the other and back ensures that one or more filled holes 6 are located at the conduit 3. When a patient inhales through the nozzle 2, air will be sucked through an air intake 14, and through the one or

This is the replacement sheet

Date: 19 FEB 1999

In this embodiment the nozzle 2 includes a deaggregating means 15 for deaggregating any agglomerates, particularly those which form when the active compound or substance is filled into the one or more holes 6.

The dosage inhalator further comprises an indicating means for indicating the number of doses remaining in the storage chamber 4 comprising a screw 16 and a nut 17. The screw 16 comprises an upper threaded part 18 and a lower threaded part 19. The upper threaded part 18 of the screw 16 is generally clylindrical, whereas the lower threaded part 19 of the screw 16 is conical. In addition, the pitch of the threads on the upper threaded part 18 of the screw 16 is much finer than the pitch of the threads on the lower threaded part 19 of the screw 16. The upper flanks 21 of the threads on the screw 16 form an oblique angle with the longitudinal axis of the screw 16, whereas the lower flanks 22 of the threads on the screw 16 are more or less perpendicularly oriented relative to the longitudinal axis of the screw 16. In this embodiment the nut 17 is a projection that extends from a resilient arm 20 that is slideably supported in a guide 23 at the inner wall of the housing 1. Before use of the dosage inhalator, a major part of the arm 20 is located outside of the guide 23 and an upper part of the arm 20 is bent inwards tending to bias the nut 17 towards the threads on the screw 16. With use of the dosage inhalator, as the arm 20 moves downwards, an increasing length of the arm 20 is located in the guide 23 and consequently bent outwards and fixed against the wall of the housing 1, entailing that the arm 20 becomes increasingly less resilient, with the consequence that the nut 17 is held more and more fixedly relative to the screw 16. The under side of the nut 17 is oriented to be generally parallel to the upper flanks of the threads on the screw 16 and the upper side of the nut 17 is oriented to be generally parallel to the lower flanks of the threads on the screw 16. Thus, the nut 17 can be slid over the screw 16 in the manner of a ratchet mechanism to any desired position along the upper threaded part 18 of the screw 16. With use of the dosage inhalator, the nut 17 moves downwards on rotation of the screw 16 from any such position.

This is the replacement sheet
19 FEB 1999
Date:

27 which is visible through a window in the housing 1 and the housing 1 is provided with a scale. With use of the dosage inhalator, the arm 20 and hence the pointer 27 is moved relative to the scale and the number of doses remaining is indicated.

A visual indication that the supply of active compound or substance is close to exhaustion can be obtained in that the window has a length which is sufficient to allow the screw 16 to be seen above the arm 20 when the arm 20 is near a lower end position. In this embodiment the screw 16 is made of brightly coloured material to indicate near exhaustion of avaliable doses.

In use, the arm 20 moves downwards at a constant rate on rotation of the disc 5 when the nut 17 is located on the upper threaded part 18 of the screw 16. However, when the nut 17 reaches the lower threaded part 19 of the screw 16, at which point the storage chamber 4 is nearly exhausted of active compound or substance, the arm 20 moves increasingly rapidly downwardly owing to the much coarser pitch of the threads on that part of the screw 16.

In the manufacture of the dosage inhalator. the nut 17 is located above the threaded parts 18, 19 of the screw 16. In this way the function of the disc 5 and the associated components can be tested before filling the storage chamber 4. After the storage chamber 4 has been filled. the nut 17 is pushed into engagement with the upper threaded part 18 of the screw 16. If the storage chamber 4 is completely filled with active compound or substance. the nut 17 is merely pushed downwards into engagement with the uppermost thread of the upper threaded part 18 of the screw 16 and the maximum number of available doses will be indicated. If, however. the storage chamber 4 is filled with a lesser amount of active compound or substance (i.e., a fewer number of doses). the nut 17 is slid further downwards over the upper threaded part 18 of the screw 16. a lesser number of available doses then being indicated. This movement of the nut 17 can be performed automatically by inserting pins of different length through a hole in the upper wall of the housing 1

This is the replacement sheet

Date: 19 FEB 1999

manoeuvering wheel 10 upon exhaustion of active compound or substance from the storage chamber 4. In this embodiment disruption of the manoeuvering wheel 10 is provided by the lever 11 which is acted upon by the arm 20 to locate the lever 11 immovably in a cut-out portion 29. The cut-out portion 29, which has a width corresponding to the width of the lever 11. is located in the lower edge of the wall of the housing 1 adjacent but rotationally beyond the first projection 12. As mentioned hereinabove. when the storage chamber 4 is nearly exhausted of active compound or substance. the nut 17 is located on the lower threaded part 19 of the screw 16 and the arm 20 moves rapidly downwardly on rotation of the screw 16. At this point the lower end 28 of the arm 20 moves into the path of the lever 11: the guide 23 being located rotationally immediately before the first projection 12. At the lowest position (corresponding to near exhaustion of the storage chamber 4). the lower end 28 of the arm 20, which is oriented obliquely relative to the longitudinal axis of the dosage inhalator. functions as a slideway for the resilient lever 11. The slideway provided by the lower end 28 of the arm 20 causes the lever 11 to be lifted over the first projection 12 and the lever 11 snaps down into the cut-out portion 29 beyond the first projection 12. It will be understood that the lever 11 can be locked either on loading or dispensing depending upon whether the cut-out portion 29 is located adjacent the first projection 12. as in this embodiment. or the second projection 13. In this way the maneuvering wheel 10 becomes locked upon exhaustion of active compound or substance. giving a clear indication that the dosage inhalator cannot be used further.

A dosage inhalator in accordance with a second embodiment of the present invention is illustrated in Figure 4. In order to avoid unnecessary duplication of description. the reference signs of the parts of the dosage inhalator of this embodiment which are the same or similar to those in the above-described embodiment will be numbered correspondingly but from 100 upwards. and only the differences in the two embodiments will be described.

In this embodiment the shaft 107 to which the rotatable disc 105 is mounted is formed as a hollow sleeve which receives the screw 116. The threads on the screw 116 have the same

This is the replacement sheet

Date: 19 FEB 1999

In this embodiment the arm 120 is a resilient tongue formed longitudinally in the wall of the shaft 107, with the free end of the tongue facing downwards and including a projection which faces radially inwardly and defines the nut 117. The nut 117 has the same general shape as the nut 17 in the above-described embodiment but is also inverted relative thereto. The pitch of the threads on the screw 116 is chosen such that the screw 116 will move downwards when the disc 105 is rotated by means of the ratchet mechanism provided by the ratchet wheel 108 and the pawl 109. In addition, in a similar manner to the above-described embodiment, the screw 116 can be pushed down into the shaft 107 to any desired position corresponding to a predetermined number of doses. Once set, the screw 116 will then move downwards from that position as the disc 105 is rotated.

In this embodiment the indicating means comprises a bar 132 which includes a scale that indicates the number of doses remaining and is slideable in a longitudinal guide 123 arranged on the inside of the wall of the housing 101. As in the above-described embodiment the housing 101 includes a window through which the scale is visible. The bar 132 is rigidly connected to the screw 116 by an interconnecting element 131 and is moved downwardly on rotation of the disc 105.

As described hereinabove, the screw 116 moves downwards with each rotational movement of the disc 105. When the storage chamber 104 is nearly exhausted of active compound or substance, the lower end of the screw 116 engages the resilient lever 111 and causes the lever 111 to be bent downwards. Since the screw 116 engages the lever 111 near to the attachment point thereof, a relatively small movement of the screw 116 moves the free end of the lever 111 a comparatively large distance. In the end position of the screw 116, corresponding to near exhaustion of active compound or substance from the storage chamber 104, the free end of the lever 111 is pushed down into an inner circumferential groove 130 formed in a wall portion of the maneuvering wheel 110, thereby allowing the maneuvering wheel 110 to be rotated freely without actuating the disc

This is the replacement sheet
19 FEB 1999
Date:

easily be set to show different numbers of doses of active compound or substance and which on the other hand gives a clear and unambigous indication that the active compound or substance in the dosage inhalator is exhausted and that the dosage inhalator consequently cannot be used further. Furhermore, this dosage inhalator is relatively simple and cheap to manufacture.

Finally, it will be understood that the present invention is not limited to the described embodiments. but can be modified in many different ways within the scope of the appended claims.

For instance, although the manoeuvering wheel 10, 110 and the disc 5, 105 in the above-described embodiments are separate parts. it is envisaged that the manoeuvering wheel 10, 110 and the disc 5, 105 could be formed as a single component. For example. the manoeuvering wheel 10, 110 could be provided as a knurled portion of the disc 5, 105 which extends through a circumferential slot in the housing 1, 101.

Furthermore, it is envisaged that the scale could be included on either the housing 1, 101 or one of the arm 20 and the bar 132, with the pointer on the other of the housing 1, 101 or one of the arm 20 and the bar 132.

Another possible modification of the above-described embodiments is to arrange the threads on the screw 16, 116 and the nut 17, 117 to allow those parts to be disengaged from each other in order to permit translational movement.

This is the replacement sheet

Date: 19 FEB 1999

of said active compound or substance to be dispensed, carrying means (5; 105) having portions (6) for carrying predetermined and reproducible unit doses of said active compound or substance from said storage means (4) to said conduit (3), said carrying means (5; 105) being actuated by means of a ratchet mechanism including a spring-biased pawl (9; 109) and mounted for intermittent movement to deliver one of said portions (6) to said conduit (3), whereby said unit dose of said active compound or substance located at said portion (6) can be dispensed into said conduit (3), and manoeuvering means (10; 110) for actuating said intermittent movement of said carrying means (5; 105); characterized in that said dosage inhalator further comprises means for disrupting, in the sense to cause to breakdown, the normal movement of said manoeuvering means (10; 110) upon exhaustion of said active compound or substance from said storage means (4), said manoeuvering means (10; 110) includes a lever (11; 111) which in the normal movement is reciprocally displaceable between two distinct positions, and operation of said ratchet mechanism is limited by said displacement of said lever (11; 111).

2. A dosage inhalator according to claim 1, wherein said disrupting means for disrupting the normal movement of said manoeuvering means (10) places said lever (11) in a locked state upon exhaustion of said active compound or substance from said storage means (4).

3. A dosage inhalator according to claim 1, wherein said disrupting means for disrupting the normal movement of said manoeuvering means (110) causes said lever (111) to be able to move freely beyond said two distinct positions upon exhaustion of said active compound or substance from said storage means (4).

4. A dosage inhalator according to any of claims 1 to 3, further comprising indicating means for indicating the number of doses remaining in said storage means (4) or the number of doses used, said indicating means comprising a screw and nut mechanism including a screw (16; 116) and a nut (17; 117) that are moved relative to one another on

This is the replacement sheet

Date: 19 FEB 1998

5. A dosage inhalator according to claim 4, wherein said screw and nut mechanism is provided with a quick adjustment feature allowing a relative translational movement between said screw (16; 116) and said nut (17; 117) which produces a corresponding movement of said indicating means to a position indicating a predetermined number of doses present in said storage means (4).

6. A dosage inhalator according to claim 5, wherein said relative translational movement is achieved automatically by the means used for filling said dosage inhalator in response to the number of doses actually being filled.

7. A dosage inhalator according to claim 6, wherein said translational movement is achieved by means of pins of different length acting directly or indirectly upon said screw and nut mechanism by pushing one of said screw (16; 116) or said nut (17; 117) thereof to a position corresponding to the length of the pin in question.

8. A dosage inhalator according to any of claims 5 to 7, wherein the threads on said screw (16; 116) and said nut (17; 117) can be disengaged from each other in order to allow said translational movement.

9. A dosage inhalator according to claim 8, wherein said nut (17; 117) is a resilient biased projection which engages the threads on said screw (16; 116), one of the flanks of said projection being more obliquely oriented relative to the longitudinal axis of said screw (16; 116) than the other flank in order to allow said projection to slide easily over the threads on said screw (16: 116) in one longitudinal direction but not in the opposite longitudinal direction in the manner of a ratchet mechanism.

10. A dosage inhalator according to claim 9, wherein the flanks of the threads on said screw (16; 116) which engage said obliquely oriented flank on said projection slope

This is the replacement sheet

Date: 19 FEB 1999

11. A dosage inhalator according to claim 9 or 10, wherein said projection is located on a resilient arm (20; 120).

12. A dosage inhalator according to any of claims 9 to 11, wherein said nut (17; 117) includes a plurality of projections.

This is the replacement sheet

Date: 19 FEB 1999

ABSTRACT

The invention relates to a dosage inhalator for dispensing to a patient a pharmacologically active compound or substance suspended in a fluid comprising a nozzle (2), a conduit (3) connected to said nozzle, a storage means (4) adjacent said conduit (3) containing multiple doses of said active compound to be dispensed, a carrying means (5) having portions (6) for carrying predetermined and reproducible unit doses of said active compound, said carrying means being mounted for movement between said conduit (3) and said storage means (4) to position one of said portions (6) in said conduit (3) whereby said unit dose of said active compound located at said portion (6) can be dispensed into the conduit, said carrying means being actuated by means of a maneuvering means (10, 110). The inhalator further comprises means (20,) for disrupting the movement of said maneuvering means (10, 110) directly or indirectly upon exhaustion of said active compound in said storage means (4).

Fig 1.

This is the replacement sheet

Date: 19 FEB 1999

FIG 1


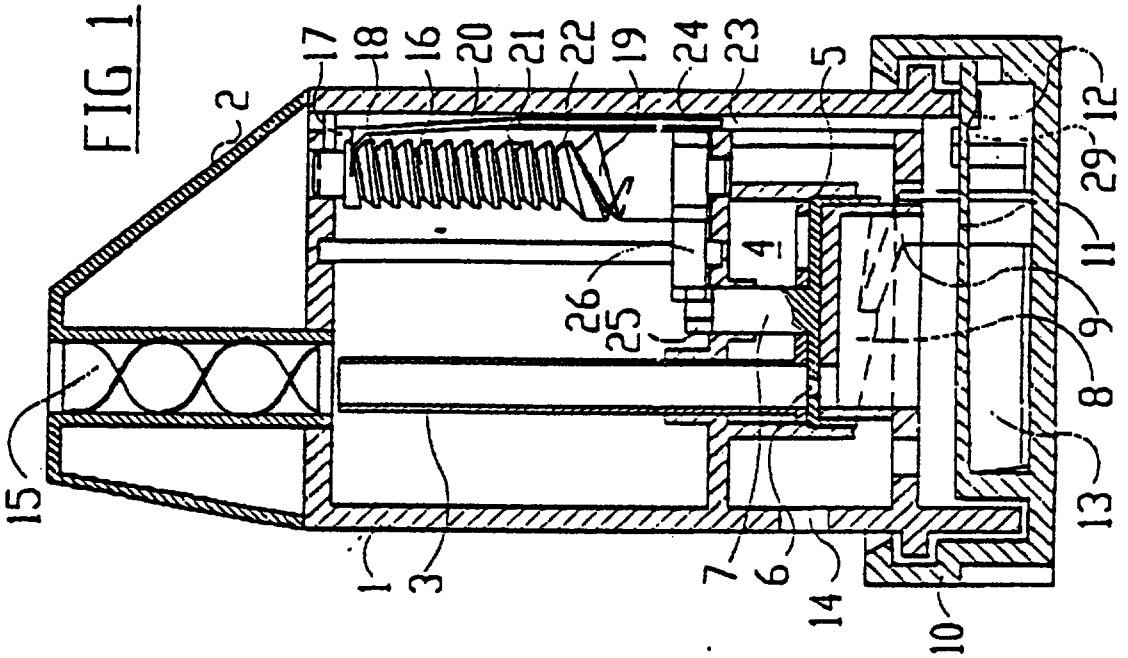


FIG 2

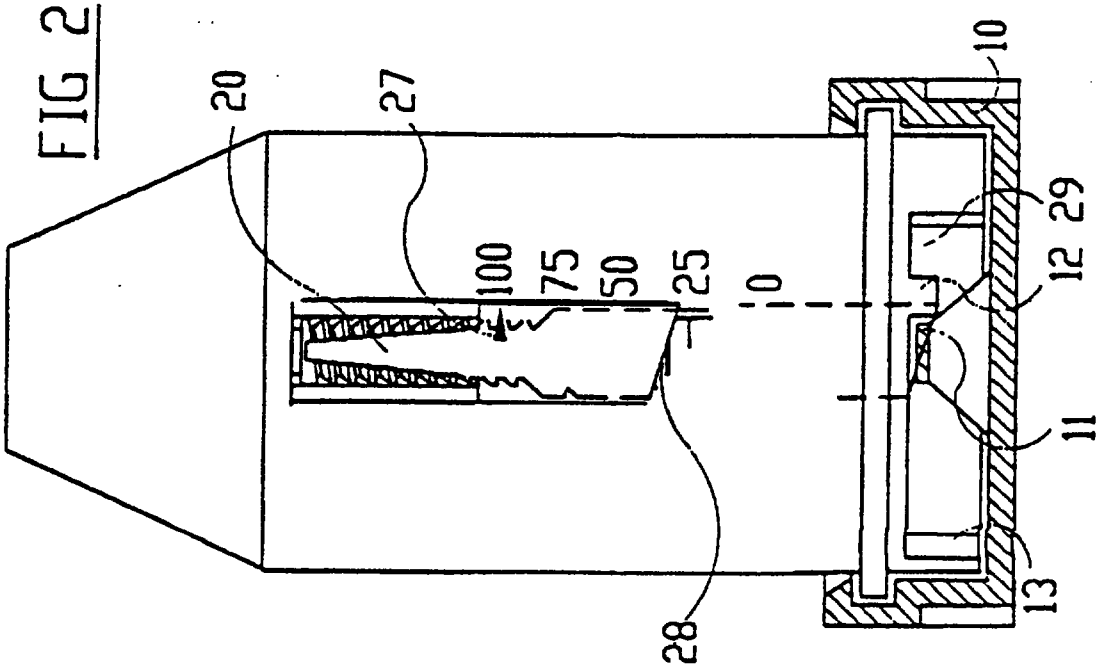

This is the replacement sheet

Date: 19 FEB 1999

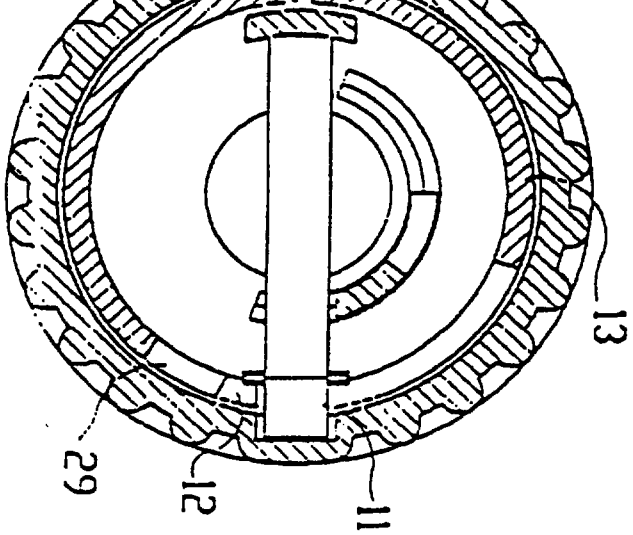


FIG 3

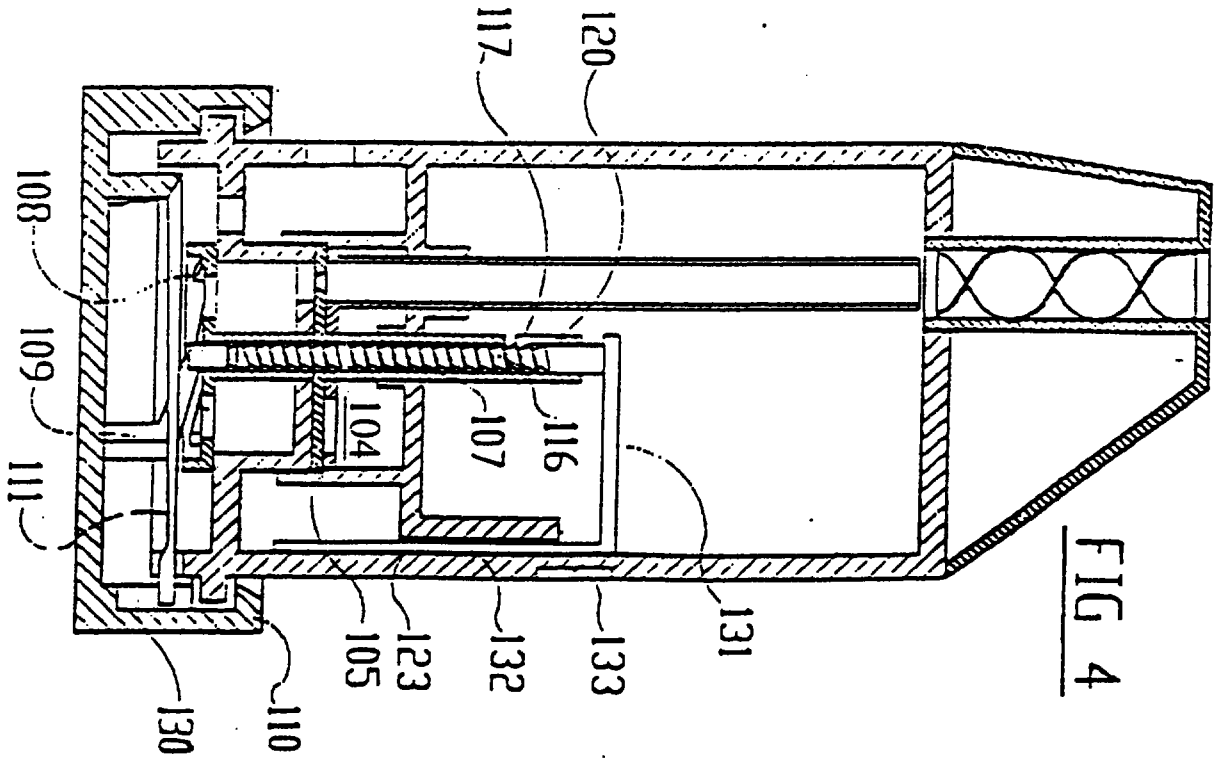


FIG 4

This is the replacement sheet

Date: 19 FEB 1999