

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 May 2004 (06.05.2004)

PCT

(10) International Publication Number  
**WO 2004/038760 A3**

(51) International Patent Classification<sup>7</sup>: **B32B 1/08**, B29D  
22/00, 23/00, B65D 85/48, 43/12, 43/20, G11B 15/68

(74) Agents: **CHRISTENSEN, Douglas, J.** et al.; Patterson,  
Thunte, Skaar & Christensen, P.A., 4800 IDS Center, 80  
South Eighth Street, Minneapolis, MN 55402-2100 (US).

(21) International Application Number:

PCT/US2003/027562

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:

3 September 2003 (03.09.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/407,749

3 September 2002 (03.09.2002)

US

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **ENTE-  
GRIS, INC.** [US/US]; 3500 Lyman Boulevard, Chaska,  
MN 55318 (US).

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): **EXTRAD, Charles,  
W.** [US/US]; 408 East Minnehaha Parkway, Minneapolis,  
MN 55419 (US).

Published:

— with international search report

[Continued on next page]

(54) Title: HIGH TEMPERATURE, HIGH STRENGTH, COLORABLE MATERIALS FOR USE WITH ELECTRONICS PRO-  
CESSING APPLICATIONS

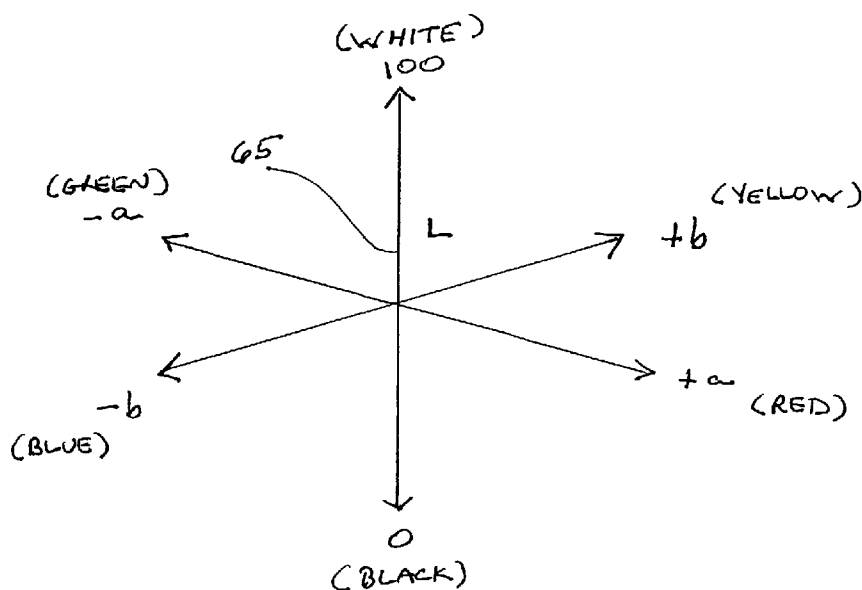

(57) Abstract: Certain embodiments include an electrostatic-discharge safe tray (100) for receiving and/or storing electronic components, e.g., read/write heads. Such trays (100) may be made from a mixture of at least one high temperature, high strength polymer, at least one metal oxide, and at least one pigment. The use of the metal oxides as conductive materials advantageously allows for light-colored electrostatic-discharge safe materials to be made, so that such materials may be colored with pigments without compromise of material performance specifications.

WO 2004/038760 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**

23 December 2004