

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 November 2005 (17.11.2005)

PCT

(10) International Publication Number
WO 2005/108804 A1

(51) International Patent Classification⁷: **F16B 21/06**,
21/10, 3/00, 1/00, B64C 27/20

(74) Agent: **ELLA CHEONG SPRUSON & FERGUSON**
(SINGAPORE) PTE LTD; Robinson Road Post Office,
P.O. Box 1531, Singapore 903031 (SG).

(21) International Application Number:
PCT/SG2004/000126

(22) International Filing Date: 7 May 2004 (07.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **SINGAPORE TECHNOLOGIES AEROSPACE LTD** [SG/SG];
540 Airport Road, Paya Lebar, Singapore 539938 (SG).

(72) Inventor; and


(75) Inventor/Applicant (for US only): **LIU, Yong, Wee**
[SG/SG]; Apt Blk 666, #09-93, Jalan Damai, Singapore
410666 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: A CONNECTOR ASSEMBLY

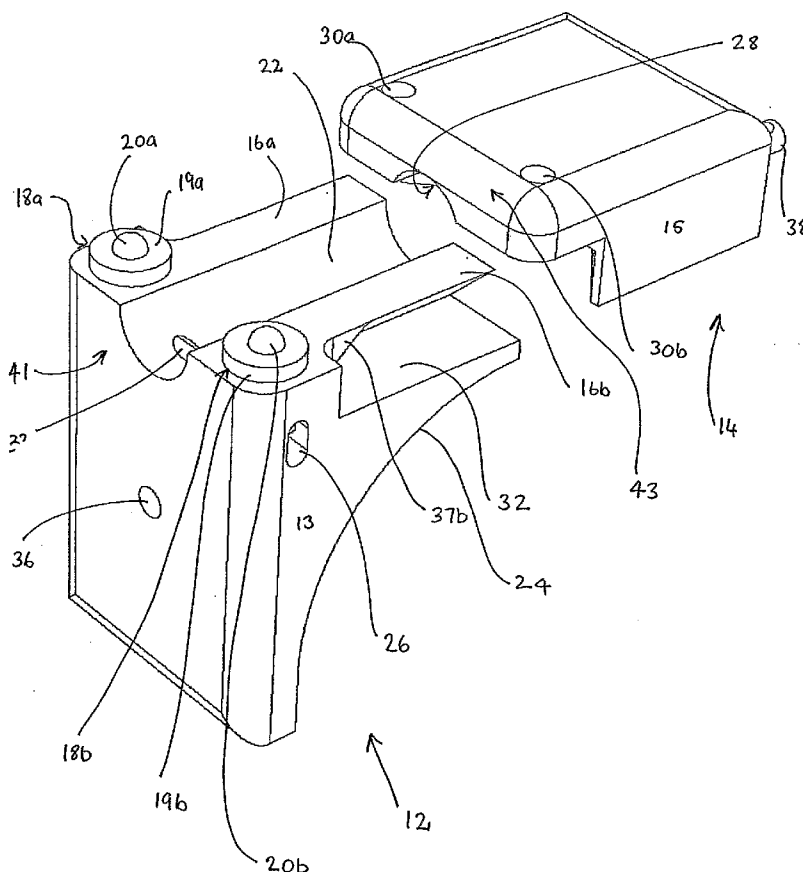

(57) Abstract: A connector for connecting a supporting shaft to a member, comprising a male connector (12) provided with a male engagement element (16a, 16b) and a female connector (14) comprising a female engagement opening for engaging the male engagement element (16a, 16b) therein. The male (12) or female connector (14) being connectable to the member in use. The connector also comprises a receiver (28, 41) provided on at least one of the male (12) or female connectors (14) for receiving the shaft on use. A spring biased lock mechanism (18a, 18b) is also provided on the male connector (12) or the female connector (14) for locking the male (12) and female connectors (14) together when the male engagement element (16a, 16b) engages the female engagement opening.



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*