

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
28 October 2021 (28.10.2021)



(10) International Publication Number
WO 2021/215924 A1

(51) International Patent Classification:
E04B 1/94 (2006.01) *E04B 1/80* (2006.01)

(21) International Application Number:
PCT/NL2021/050265

(22) International Filing Date:
22 April 2021 (22.04.2021)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1043636 23 April 2020 (23.04.2020) NL

(71) Applicant: **COMFORTHOME B.V.** [NL/NL]; Achtersloot 35b, 3401 NS IJsselsteijn (NL).

(72) Inventor: **BERLEE, Anthonie Bernardus**; Dennenweg 20, 3735 MT Bosch en Duin (NL).


(74) Agent: **NEDERLANDSCH OCTROOIBUREAU**; P.O.Box 29720, 2502 LS The Hague (NL).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: MELTING-FUSE DESCRIPTION

Fig. 4

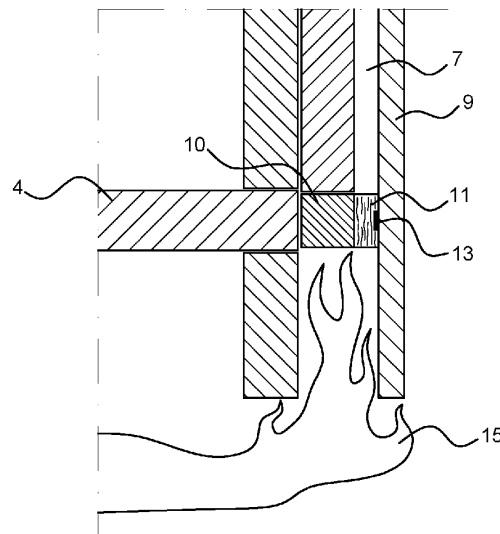

(57) Abstract: The melting-fuse may be a non-stable container that contains compressed or vacuumed mineral wool, such as stone wool, that is attached to the fixation details between building components that must be air-permeable that must then provide sufficient fire resistance. The application includes melting-fuses. The fuse works in two parts, first it holds the compressed or vacuumed mineral wool in the desired location, without this prematurely expanding and thus interrupting the necessary air flow. The second form of the fuse is designed for the fact that this melts first in the event of fire, after which the compressed or vacuumed mineral wool expands and seals the cavity. Through the melting of the fuse and the subsequent sealing of the detail / opening where the application is installed, the further spread of the fire through the air flow is prevented.

[Continued on next page]

WO 2021/215924 A1

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))