



(43) International Publication Date
30 May 2013 (30.05.2013)

- (51) International Patent Classification:
E06B 5/16 (2006.01) *E06B 3/76* (2006.01)
- (21) International Application Number:
PCT/NO2012/050234
- (22) International Filing Date:
22 November 2012 (22.11.2012)
- (25) Filing Language: Norwegian
- (26) Publication Language: English
- (30) Priority Data:
20111608 22 November 2011 (22.11.2011) NO
- (71) Applicant: BOCON HOLDING AS [NO/NO]; Tollbugt.
9/11, N-8001 Bodø (NO).
- (72) Inventor: DOBAKK, Espen; Hokkåsveien 15, N-8028
Bodø (NO).
- (74) Agent: ACAPO AS; P.O. Box 1880 Nordnes, N-5817
Bergen (NO).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FIRE DOOR LEAF FOR CERTIFIED USE

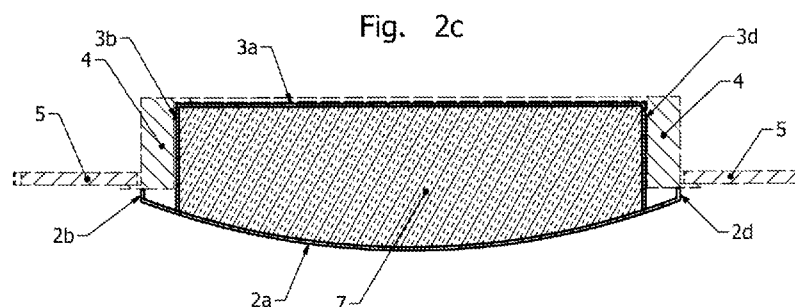

(57) **Abstract:** Fire door leaf for industrial use in relation to openings in structures such as buildings, vessels and/or land and sea-based oil and gas installations, where the fire door with said fire door leaf contributes to providing a passage between different compartments in said structures. The fire door leaf is constructed to work as an element in a certified barrier against the spreading of fire, smoke and/or pressure. The leaf comprises two leaf elements where each leaf element comprises a main surface, and where the leaf elements assembled is suitable to forming a volume between themselves without stiffening elements within the volume. At least one main surface comprises a single-curved surface.