

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/105301 A1

(51) International Patent Classification⁷: **H02G 5/00**

(21) International Application Number: PCT/IT03/00325

(22) International Filing Date: 27 May 2003 (27.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
BS2002A000054 5 June 2002 (05.06.2002) IT

(71) Applicant (for all designated States except US): **BBI ELECTRIC S.p.A.** [IT/IT]; Via Einaudi, I-25030 Torbole Casaglia (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GHIDINELLI, Paolo** [IT/IT]; Via Einaudi, I-25030 Torbole Casaglia (IT).
PETRONE, Libero [IT/IT]; Via Einaudi, I-25030 Torbole Casaglia (IT).

(74) Agent: **SANGIACOMO, Fulvia**; Biesse S.R.L., C.SO Matteotti, 42, I-25122 Brescia (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR WRAPPING BUS-BARS FOR PREFABRICATED ELECTRIC DUCTS

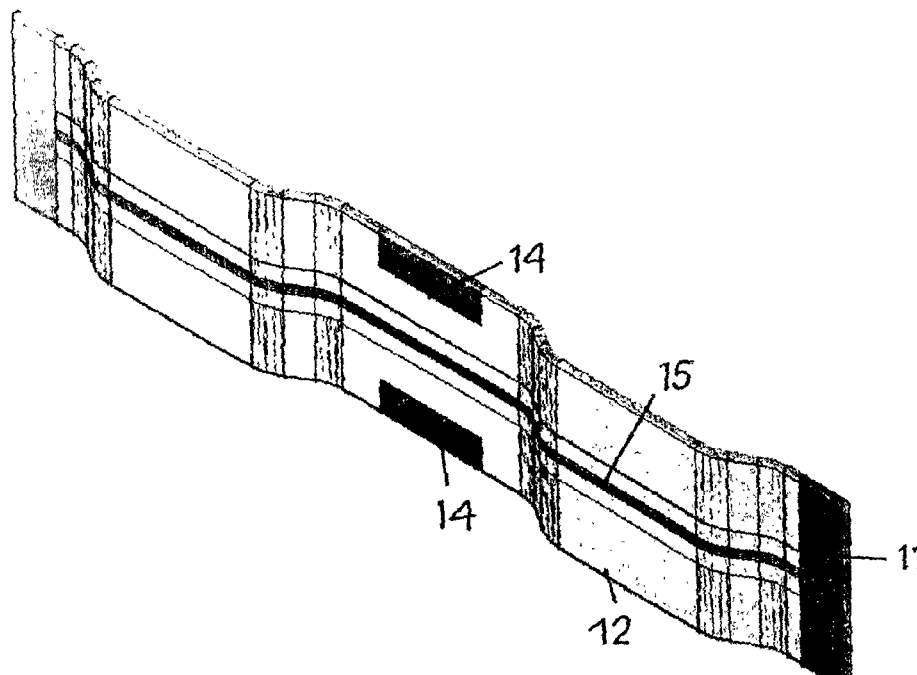

(57) Abstract: The invention concerns a method of wrapping bus-bars for prefabricated electric ducts. An insulating sheath is prepared having the shape and dimensions of the bar to be covered, the insulating sheath is cut at some preset intervals; a bus-bar is housed in the shaped insulating sheath; the overlapping edges of the insulating sheath are sealed lengthwise using ultrasound welding or a glue; and the bar-sheath assembly is bent at preset intervals along its length. The invention concerns also the bus-bar achieved using this method.



WO 03/105301 A1