




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04R 9/06	A1	(11) International Publication Number: WO 98/31188 (43) International Publication Date: 16 July 1998 (16.07.98)
(21) International Application Number: PCT/GB98/00014 (22) International Filing Date: 5 January 1998 (05.01.98) (30) Priority Data: 9700363.6 9 January 1997 (09.01.97) GB 9711593.5 6 June 1997 (06.06.97) GB 9718730.6 4 September 1997 (04.09.97) GB (71) Applicant (for all designated States except US): NEW TRANS- DUCERS LIMITED (GB/GB); Stonehill, Huntingdon, Cam- bridgeshire PE18 6ED (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): AZIMA, Henry [CA/GB]; 3 Southacre Close, Chaucer Road, Cambridge CB2 2TT (GB); COLLOMS, Martin [GB/GB]; 22 Burgess Hill, Lon- don NW2 2DA (GB); ROBERTS, Martin [GB/GB]; 17 Home Farm Lane, Bury St. Edmunds, Suffolk IP3 2QI (GB); BANK, Graham [GB/GB]; 1 Boartree Way, Hunt- ington, Cambridgeshire PE18 6GL (GB); HARRIS, Neil [GB/GB]; 9 Davey Crescent, Great Shelford, Cambridge CB2 5JF (GB); DIAHANSOUZI, Bijan [GB/GB]; 101 Pier House, Cheyne Walk, London SW3 5HN (GB).		(74) Agent: MAGUIRE, BOSS; 5 Crown Street, St. Ives, Cam- bridgeshire PE17 4EB (GB). (81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: LOUDSPEAKERS

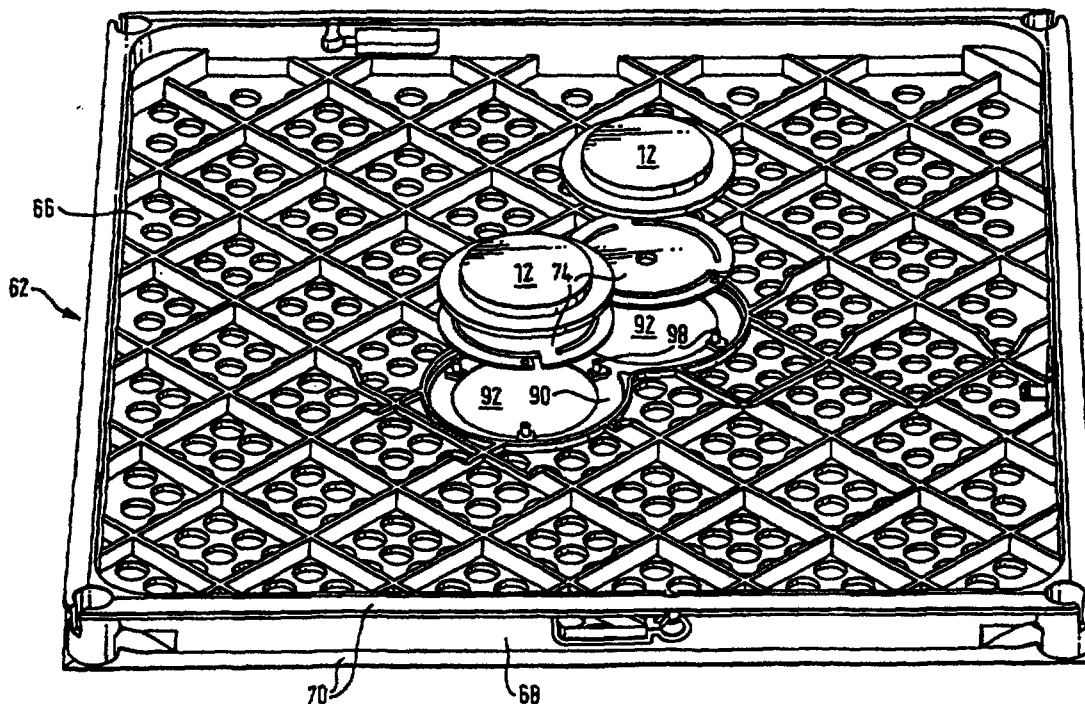

(57) Abstract

A loudspeaker drive unit comprising a resonant acoustic radiator, an exciter on the radiator to apply bending wave energy to the radiator to cause it to resonate, a support for the loudspeaker drive unit, and means resiliently coupling the exciter to the support.