

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 November 2003 (27.11.2003)

PCT

(10) International Publication Number
WO 03/097326 A1

(51) International Patent Classification⁷: **B29C 45/72**

(21) International Application Number: PCT/CA03/00414

(22) International Filing Date: 24 March 2003 (24.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/147,360 17 May 2002 (17.05.2002) US

(71) Applicant: **HUSKY INJECTION MOLDING SYSTEMS LTD.** [CA/CA]; AMC/IP Group, 500 Queen Street South, Bolton, Ontario L7E 5S5 (CA).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(72) Inventors: **UNTERLANDER, Richard, M.**; 37 Witherspoon Way, Nobleton, Ontario L0G 1N0 (CA). **NETER, Witold**; 62 Shadow Lake Trail, Newnan, GA 30265 (US). **ROMANSKI, Zbigniew**; 1018 Franconia Drive, Mississauga, Ontario L4Y 2L7 (CA). **ARNOTT, Robin, A.**; #7688, RR #3, Alliston, Ontario L9R 1V3 (CA).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR POST MOLD COOLING OF PLASTIC PIECES

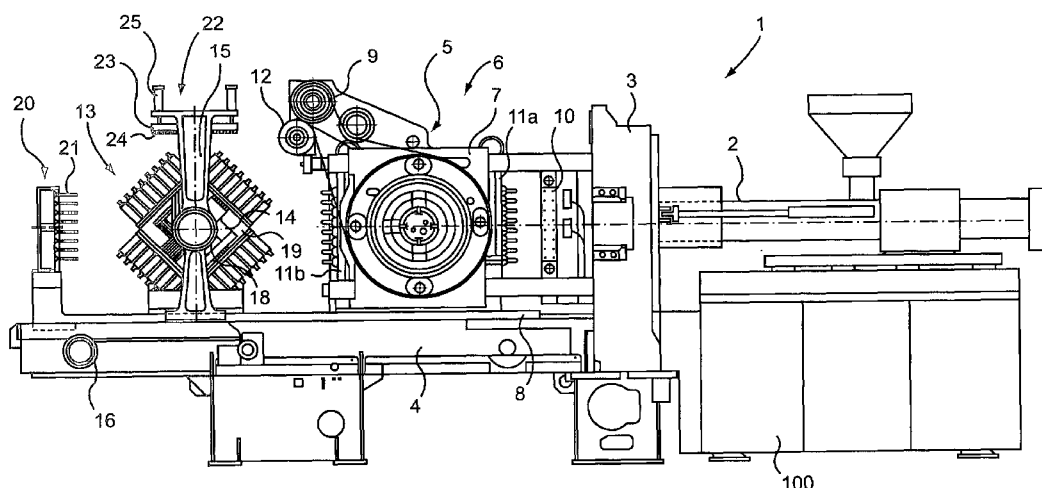

(57) Abstract: Method and apparatus for cooling molded plastic pieces preferably includes a take out structure/step (13) configured to hold the plurality of plastic parts oriented such that closed ends thereof are disposed toward an inside of the take out structure (13) and open ends thereof are disposed toward an outside of the take out structure. A movement structure/step is configured to cause relative movement between the take out structure (13) and at least one of a first cooling station and a second cooling station. The first cooling station (20) includes a first cooling structure/step configured to provide a cooling fluid to an inside of the plurality of plastic parts through the open ends thereof. The second cooling station (22) includes a second cooling structure/step configured to provide a cooling fluid to an inside of the plurality of plastic parts through the open ends thereof.

WO 03/097326 A1