14/04/03

200302243

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162

(43) International Publication Date
6 June 2002 (06.06.2002)

PCT

(10) International Publication Number
WO 02/044520 A3

(51) International Patent Classification[7]: E21B 41/00, 17/10, 33/03, 33/04

(21) International Application Number: PCT/US01/43765

(22) International Filing Date:
14 November 2001 (14.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/726,008 29 November 2000 (29.11.2000) US

(71) Applicant: COOPER CAMERON CORPORATION [US/US]; Suite 1200, 515 Post Oak Boulevard, Houston, TX 77027 (US).

(72) Inventor: ALLEN, Timothy, J.; Route 2, Box 224A, Hempstead, TX 77445 (US).


(74) Agent: HARTMANN, Michael, P.; Cooper Cameron Corp., Patent Services, P.O. Box 1212, Houston, TX 77251-1212 (US).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SPOOL FOR INJECTING A FLUID BETWEEN CASINGS

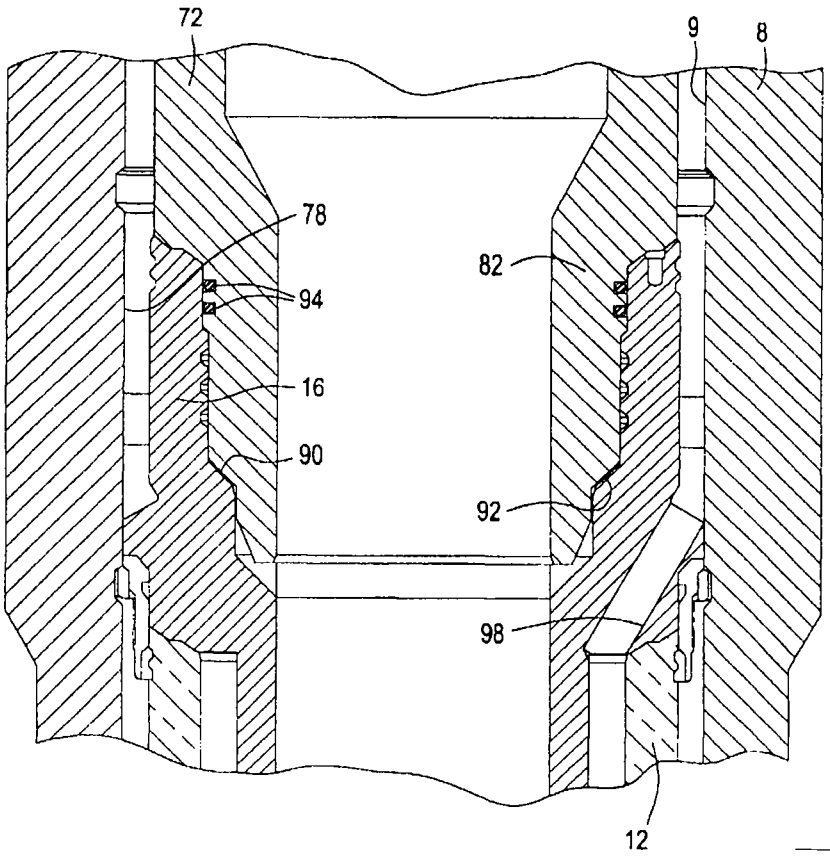

(57) Abstract: An injection spool (40) for injecting a fluid, for example a slurry of drilling cuttings, into a subsea wellhead has an outer housing which has a first end for connection to a wellhead such that the central bore of the housing is aligned with the central bore of the wellhead. A inner housing, for example an isolation sleeve (72), having a central bore therethrough is disposed within the outer housing, whereby a cavity is formed between the inner and the outer housing. An injection (60) port in the outer housing has an opening into the cavity (76). The inner housing (72) extends from within the outer housing beyong the first end of the outer housing for forming a cavity (76). This cavity (76) connects the cavity (78) in the injection spool with an annular cavity (20) defined by adjacent casings (14, 18) present. A fluid injected into the injection spool (40) through the port (60) in the housing flows into an annulus between two casings.

WO 02/044520 A3

ACTION

Published:
— *with international search report*

(88) Date of publication of the international search report:
29 August 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.