

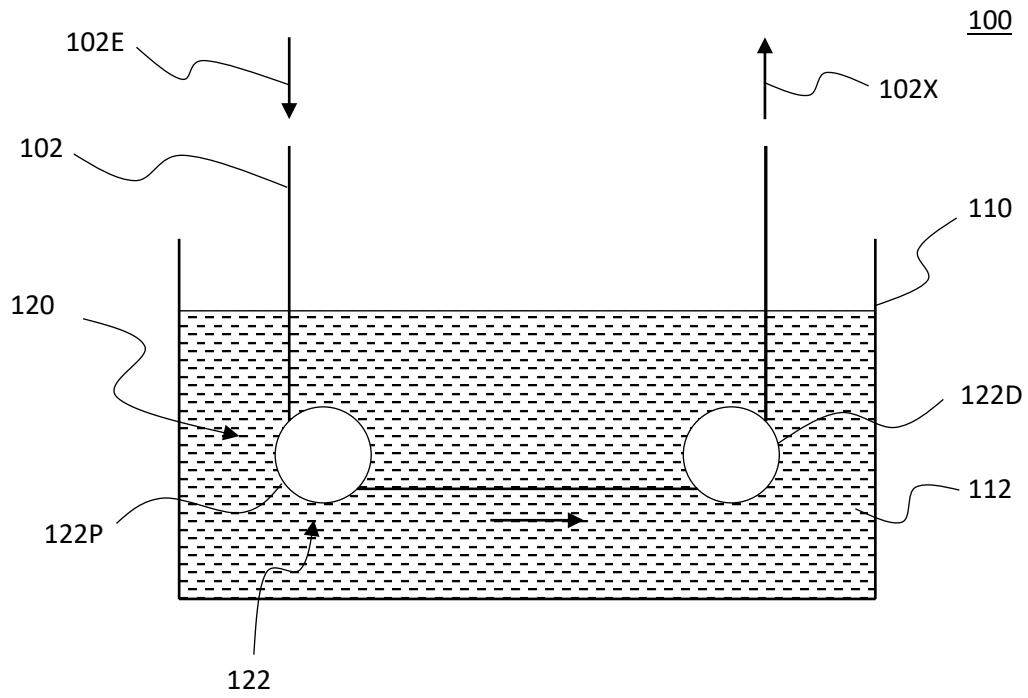


Fig. 1

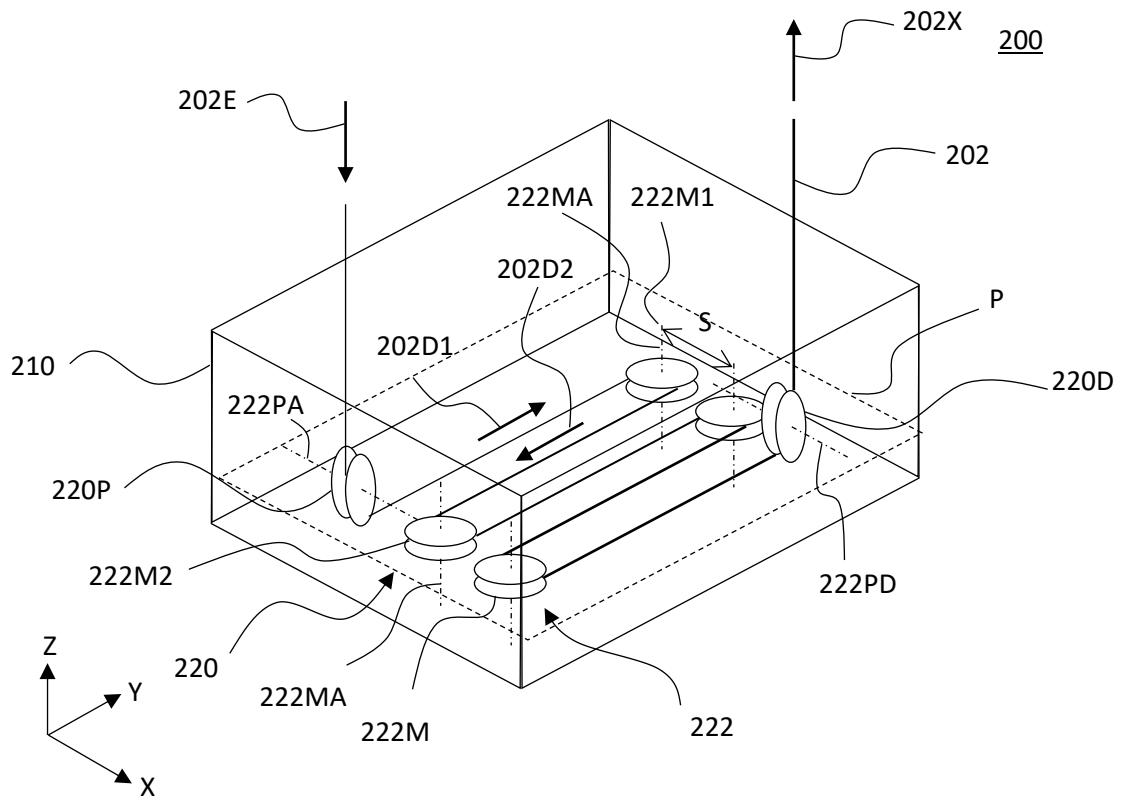


Fig. 2

conveying the wire into and out of a tank containing a precursor solution comprising polysilazane using a plurality of conveying elements, wherein each of the plurality of conveying elements is adapted to receive the wire in one direction and convey the wire to another direction, wherein the one direction is different from the another direction.

Fig. 3

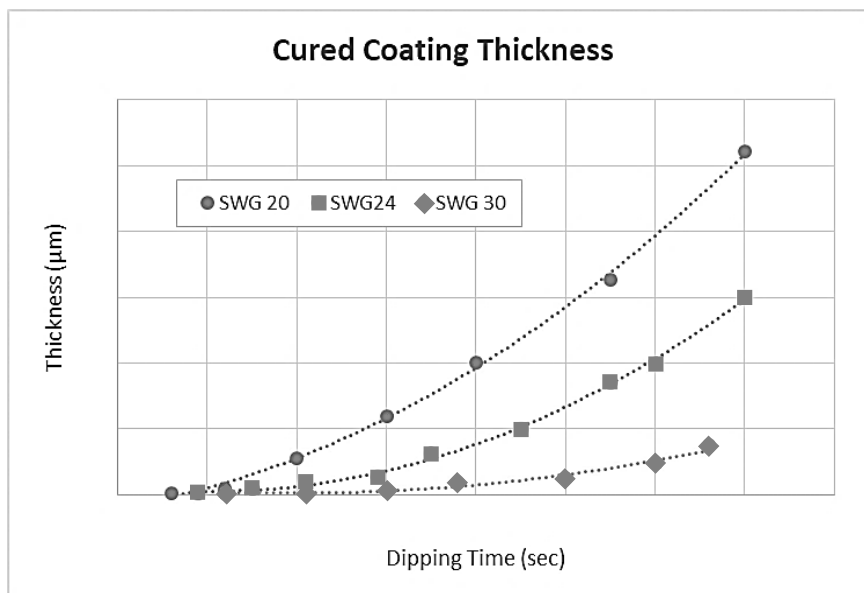


Fig. 4