



- (51) **International Patent Classification:**  
*F16L 37/098* (2006.01) *A61M 39/10* (2006.01)
- (21) **International Application Number:**  
PCT/IB2014/061817
- (22) **International Filing Date:**  
29 May 2014 (29.05.2014)
- (25) **Filing Language:** Italian
- (26) **Publication Language:** English
- (30) **Priority Data:**  
TO2013A000433 29 May 2013 (29.05.2013) IT
- (71) **Applicant:** INDUSTRIE BORLA S.P.A. [IT/IT]; Via G. Di Vittorio, 7bis, I-10024 Moncalieri (Torino) (IT).
- (72) **Inventor:** GUALA, Gianni; Strada Villa Zanetti, 28/18, I-10133 Torino (IT).
- (74) **Agent:** BUZZI, Franco; Buzzi, Notaro & Antonielli d'Oulx S.r.l., Via Maria Vittoria, 18, I-10123 Torino (IT).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) **Title:** CONNECTOR FOR MEDICAL LINES

FIG. 3

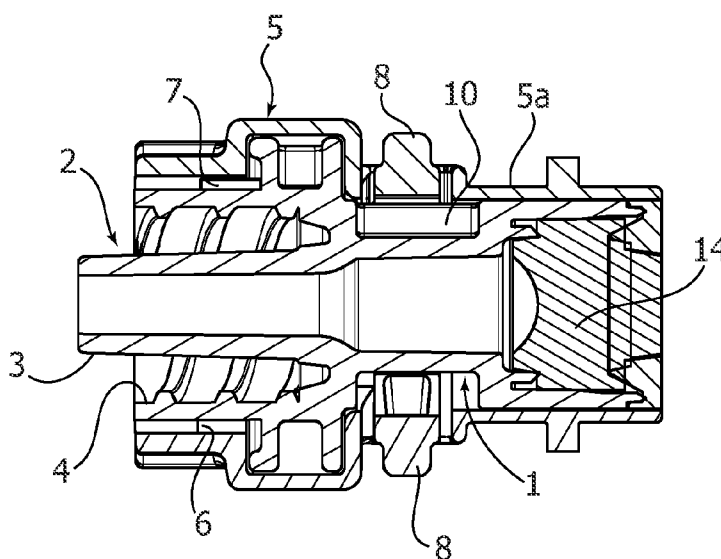

(57) **Abstract:** A connector for medical lines, comprising a tubular body (1) having a male luer-lock fitting (2) at one end, intended to be screw-coupled with a complementary female fitting. An outer jacket (5) is coupled in unidirectional rotation with the tubular body (1) in the direction corresponding to the screwing of the male fitting (2) and freely rotatable in the opposite direction. For selectively coupling the outer jacket (5) with the tubular body (1) in the direction corresponding to the unscrewing of the male fitting (2) at least one side push-button (8) carried by said outer jacket (5) is provided.