

FIG. 1

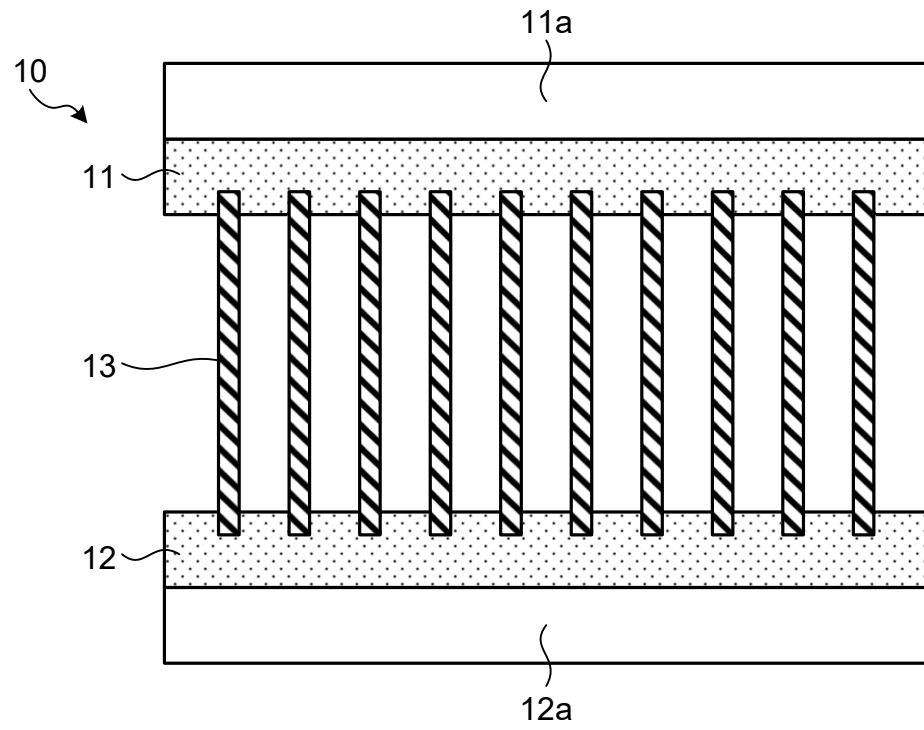


FIG.2

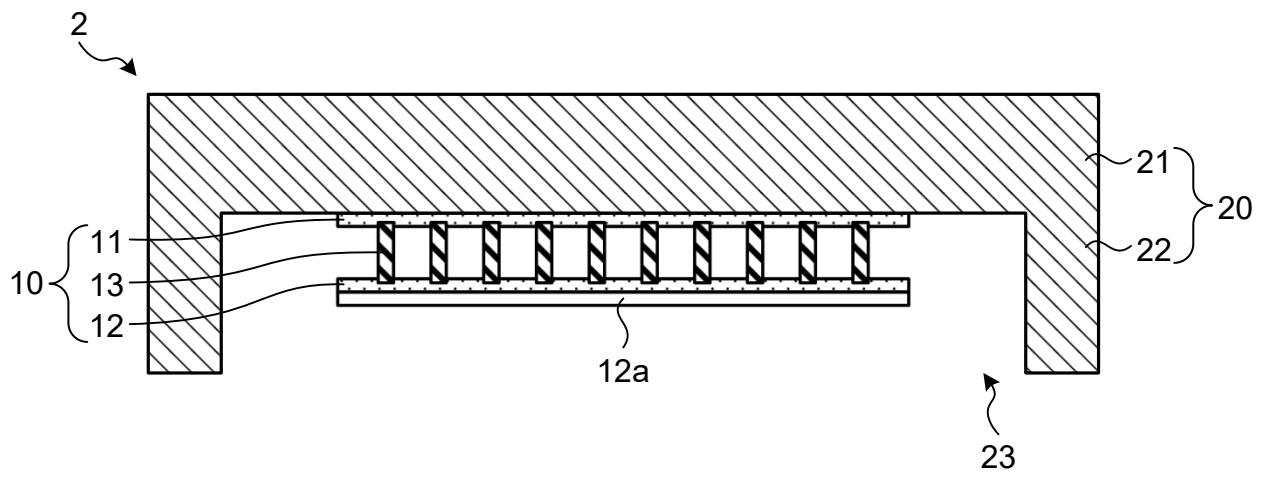


FIG.3

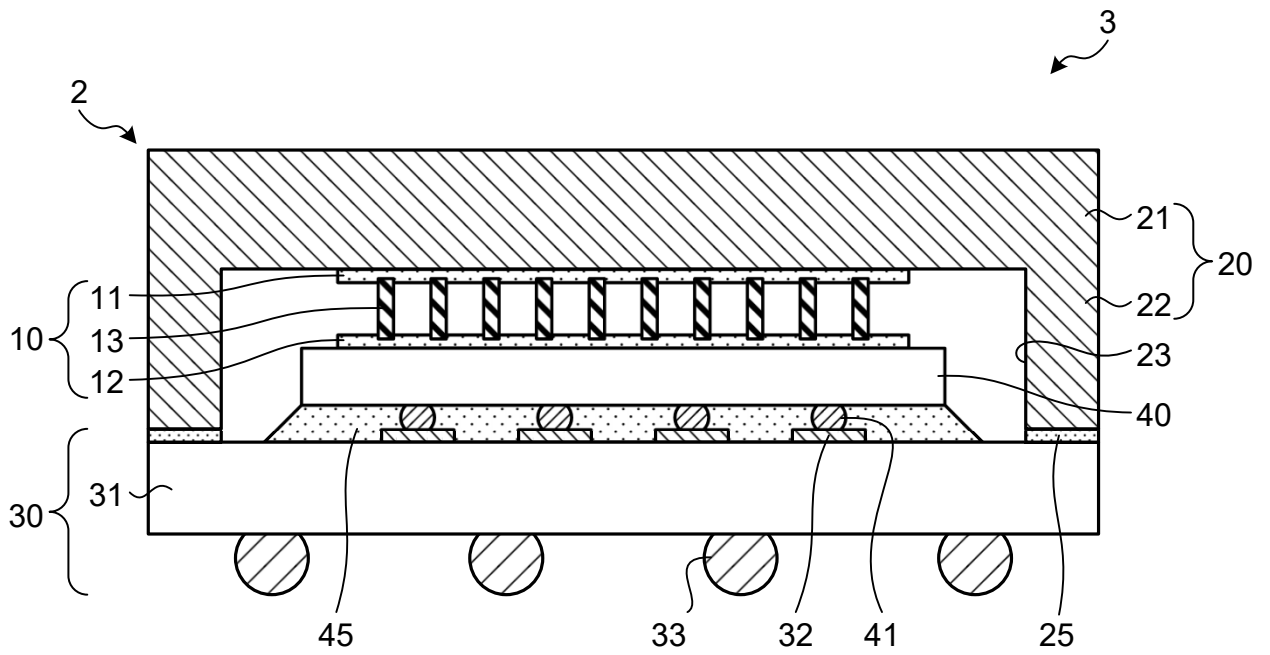


FIG.4

COMPONENT	PRODUCT NAME	USE AMOUNT (PARTS)								
		EXAMPLE	COMPARATIVE EXAMPLE 1	COMPARATIVE EXAMPLE 2	COMPARATIVE EXAMPLE 3	COMPARATIVE EXAMPLE 4	COMPARATIVE EXAMPLE 5	COMPARATIVE EXAMPLE 6	COMPARATIVE EXAMPLE 7	
(A) EPOXT RESIN	ZX-1059	15	15	15	PPE	30	30	30	30	
(B) THERMOPLASTIC RESIN (Tg≥50°C)	YX7200B35	5	5	-		7.5	7.5	7.5	7.5	
(C) THERMOPLASTIC RESIN (Tg<50°C)	YX7180BH40	15	-	15		-	-	-	-	
(D) CURING AGENT	2E4MZ	0.2	0.2	0.2		-	-	-	-	
	Ail-01	-	-	-		1	1	1	1	
	U-CAT 3512T	0.5	0.5	0.5		0.5	0.5	0.5	0.5	
(E) CURING ACCELERATOR	SALICYLIC ACID	0.05	0.05	0.05		-	-	-	-	
(F) INORGANIC FILLER	SO-C2	-	-	-		10	5	-	-	
(G) COUPLING AGENT	KBM-573	-	-	-		0.1	0.05	-	0.1	
REMARKS	-	-	-	FAILED TO FORM SHEET	-	-	-	-		

FIG.5

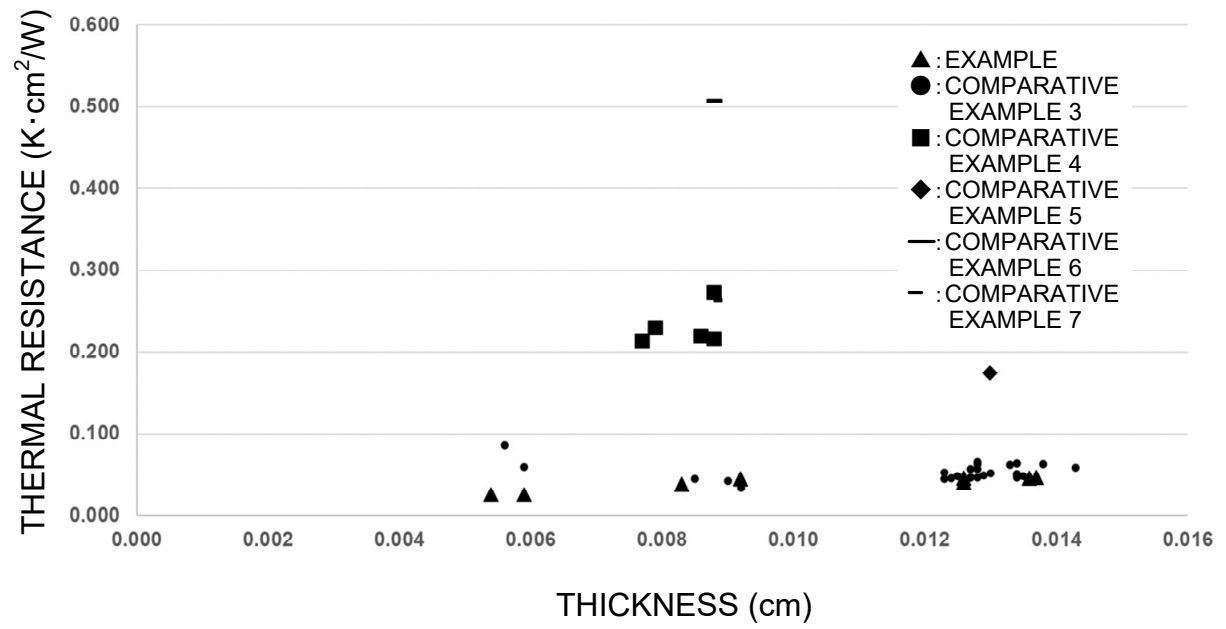


FIG.6

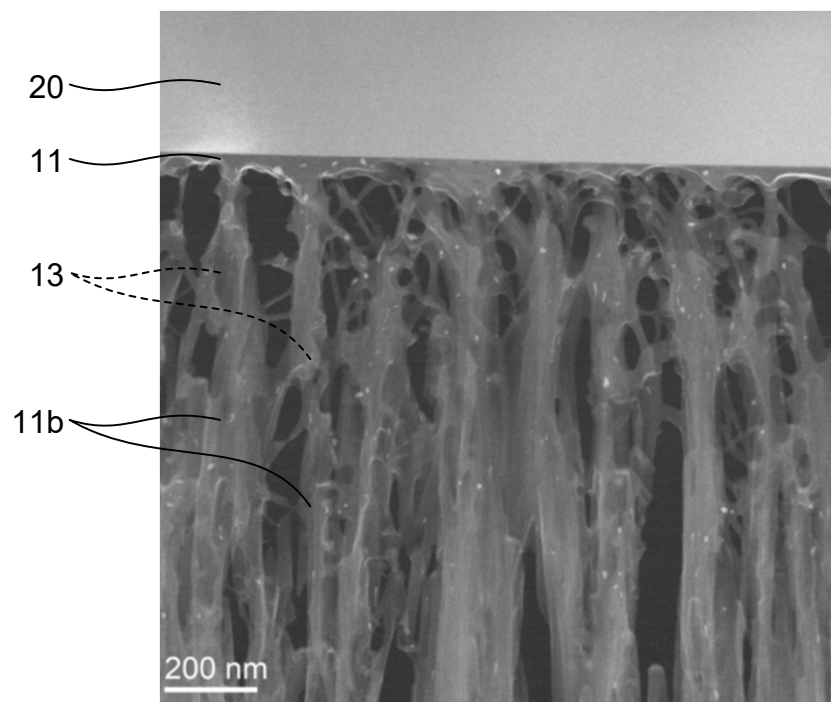


FIG.7

	SHEAR STRENGTH (MPa)
COMPARATIVE EXAMPLE 3	0.4
EXAMPLE	3.1