



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:F25B 19/00, F17C 7/02, 9/02, 13/00,
C22C 38/08

A1

(11) International Publication Number:

WO 99/32837

(43) International Publication Date:

1 July 1999 (01.07.99)

(21) International Application Number: PCT/US98/12725

(22) International Filing Date: 18 June 1998 (18.06.98)

(30) Priority Data:

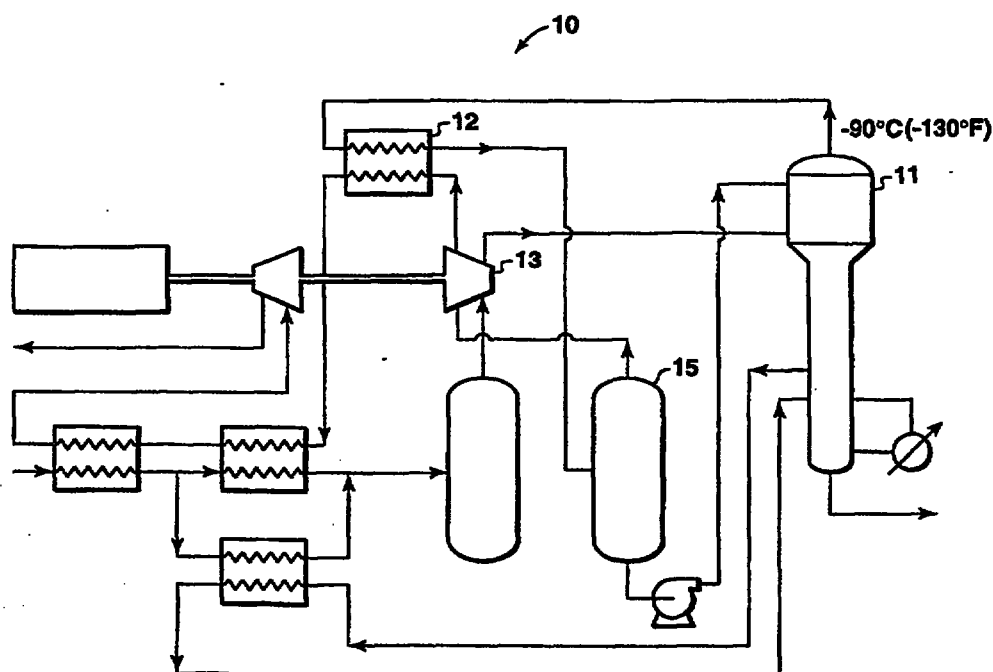
60/068,208

19 December 1997 (19.12.97) US

(71) Applicant: EXXON PRODUCTION RESEARCH COMPANY
[US/US]; 3120 Buffalo Speedway, P.O. Box 2189, Houston,
TX 77252-2189 (US).(72) Inventors: MINTA, Moses; 39 Sterling Street, Sugar Land,
TX 77479 (US). KELLEY, Lonny, R.; 12710 Kingside
Lane, Houston, TX 77024 (US). KELLEY, Bruce, T.; 5619
Rocky Brook, Kingwood, TX 77345 (US). KIMBLE, E.,
Lawrence; 4814 Rebel Ridge Drive, Sugar Land, TX 77478
(US). RIGBY, James, R.; 3834 Echo Mountain Drive,
Kingwood, TX 77345 (US). STEELE, Robert, E.; 1102
Sandpiper Drive, Seabrook, TX 77586 (US).(74) Agents: CASAMASSIMA, Salvatore, J. et al.; Exxon Pro-
duction Research Company, P.O. Box 2189, Houston, TX
77252-2189 (US).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,
GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW,
MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ,
TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent
(GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT,
LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI,
CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: PROCESS COMPONENTS, CONTAINERS, AND PIPES SUITABLE FOR CONTAINING AND TRANSPORTING
CRYOGENIC TEMPERATURE FLUIDS

(57) Abstract

Process components (12), containers (15, 11), and pipes are provided that are constructed from ultra-high strength, low alloy steels containing less than 9 wt.% mickel and having tensile strengths greater than 830 MPa (120 ksi) and DBTTs lower than about -73 °C (-100 °F).