

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(43) 国际公布日
2012 年 4 月 5 日 (05.04.2012)

PCT


(10) 国际公布号
WO 2012/041199 A1

- (51) 国际专利分类号:
G06K 19/07 (2006.01)
- (21) 国际申请号: PCT/CN2011/080168
- (22) 国际申请日: 2011 年 9 月 26 日 (26.09.2011)
- (25) 申请语言: 中文
- (26) 公布语言: 中文
- (30) 优先权:
201010295763.5 2010 年 9 月 28 日 (28.09.2010) CN
- (71) 申请人 (对除美国外的所有指定国): 北京握奇数据系统有限公司 (BEIJING WATCH DATA SYSTEM CO., LTD.) [CN/CN]; 中国北京市朝阳区首都机场路万红西街 2 号燕东商务花园, Beijing 100015 (CN)。
- (72) 发明人: 及
- (75) 发明人/申请人 (仅对美国): 尚建强 (SHANG, Jian-qiang) [CN/CN]; 中国北京市朝阳区首都机场路万红西街 2 号燕东商务花园, Beijing 100015 (CN)。贾振波 (JIA, Zhenbo) [CN/CN]; 中国北京市朝阳区首都机场路万红西街 2 号燕东商务花园, Beijing 100015 (CN)。李明 (LI, Ming) [CN/CN]; 中国北京市朝阳区首都机场路万红西街 2 号燕东商务花园, Beijing 100015 (CN)。
- (74) 代理人: 北京中博世达专利商标代理有限公司 (BEIJING ZBSD PATENT&TRADEMARK AGENT LTD.); 中国北京市海淀区大柳树路 17 号富海大厦 B 座 501 室, Beijing 100081 (CN)。
- (81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。
- (84) 指定国 (除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)。

[见续页]

(54) Title: MENU ASSEMBLY METHOD, MENU ASSEMBLY SYSTEM AND TERMINAL

(54) 发明名称: 菜单拼装方法、菜单拼装系统和终端

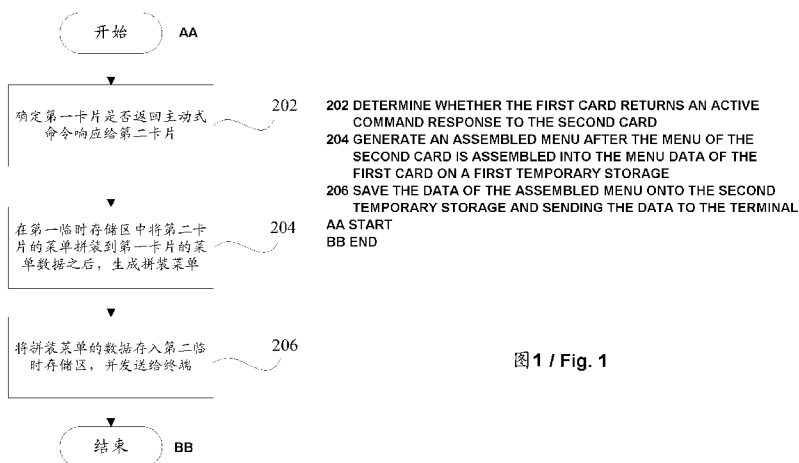

(57) Abstract: Provided is a method of assembling menu, comprising: determine whether a first card returns a proactive command response to a second card; generate an assembled menu after the menu of the second card is assembled into the menu data of the first card on a first temporary storage; also save the data of the assembled menu onto a second temporary storage and send the data to a terminal. Also provided is a menu assembly system, comprising: a first determination module for determining whether the first card returns an active command response to the second card; a menu assembly module for generating the assembled menu after the menu of the second card is assembled into the menu data of the first card on the first temporary storage; a second temporary storage for saving the data of the assembled menu and sending the data to the terminal. Also provided is a terminal, comprising the aforementioned system. The technical scheme of the present application achieves the assembling of the menus from two different chips, generating and displaying the assembled menu.

[见续页]