

REPLACED SHEETS		SG
☒	Description : paged ...1... to paged ...12...	
☒	Claim(s) : paged ...1... to paged ...17...	
☒	Drawing(s) : paged ...1/4... to paged ...1/4...	
☒	Abstract : paged ...1/1... to paged ...1/1...	
DATE OF RECEIPT		

REESTABLISHMENT OF CALL AFTER DISCONNECT

Field of the Invention




The present invention relates to any communication system and in particular to mobile radio communication systems. The present invention provides to a generic call reestablishment procedure when a connection is unwillfully lost or when the quality of the call is bad. The present invention also provides for associated apparatus.

Background of the Invention

10 In cellular mobile radio systems, it is not unusual for a radio connection to be lost. The radio connection can be lost for a variety of reasons including fading when the mobile station is standing still, radio shadow from large buildings or tunnels, a handoff to a radio channel which can not support
 15 the new connection or when a base station breaks down or for some emergency must be switched off. As a result, a reestablishment routine is used in cellular systems to reconnect the lost connection.

Figure 1 illustrates a prior art system for reestablishing a
 20 call in a cellular radio system. In this example, a standard telephone 109 communicates via a public switched telephone network PSTN (not shown) and a cellular radio communication system with a mobile radio station 104. The cellular radio communication system includes two radio base stations 101 and
 25 102, which are both connected to the same mobile services switching center 103 by connections 107 and 108, respectively. In Figure 1, the mobile station 104 is communicating with telephone 109 through base station 101. When the mobile station is moving toward the base station 102, it may become
 30 necessary to handoff the mobile station 104 from base station



101 to base station 102. However, if the mobile station 104 is disconnected from the base station 101 before receiving a handoff order to the new base station 102, the mobile station may initiate a reestablishment routine.

- 5 In this known reestablishment routine, the mobile station 104 scans the signal strengths of the surrounding base stations and selects the base station with the highest or next highest signal strength. The mobile station 104 then accesses the selected base station, base station 102 in this example, and
10 requests to be reconnected. The selected base station reports the request for reconnection to the mobile services switching center 103. The mobile services switching center 103 then orders the selected base station to assign a traffic channel to the mobile station 104, and the mobile services switching
15 center 103 then connects the mobile station to the remaining segment of the call which has been parked in the mobile services switching center 103.

- In the European cellular mobile radio system (GSM), a call reestablishment procedure has been standardized which
20 provides for call reestablishment within the same mobile services switching center. According to this standard, the mobile station accesses the best or next best base station and requests a reconnection which is provided if the accessed base station is connected to the same mobile services switching
25 center as the original base station. However, this reestablishment routine is problematic in the sense that if the accessed base station is not connected to the same mobile services switching center, the reconnection can not be provided. For example, a subscriber with a hand held mobile
30 station may enter or leave a building, thereby losing contact with its base station and enter an overlay network with another mobile services switching center. As a result, if the mobile station loses its connection with the base station, the call can not be reestablished. Furthermore, in non-cellular

systems, an unwillful disconnection of a call associated with a wire-bound terminal in a PABX or in the public switched telephone network PSTN, can only be reconnected by redialing. A faster method for reestablishing a call which does not
5 require the user going on hook and redialing the number would therefore be welcome.

Summary of the Disclosure

It is an object of the present invention to provide a method for reestablishing a call after a call has been disconnected
10 in a communication system, wherein a communication path is established by a service node which selects a meeting point at which the parties of a call are connected together. In the reestablishment routine disclosed in one embodiment of the present invention, after a radio mobile terminal has been
15 disconnected, the radio mobile terminal scans the signal strength of surrounding base stations and selects the base station with the highest signal strength. The radio mobile terminal then accesses the selected base station and initiates a call back to the meeting point. The base station then
20 assigns a traffic channel to the radio mobile terminal and the network reconnects the radio mobile terminal to the meeting point, thereby reestablishing the call.

Another embodiment of the present invention provides the option of reestablishing a call within a certain period of
25 time after a call is willfully or unwillfully disconnected involving a wirebound terminal. The reconnection can be requested by pressing a predetermined key or keys on the keyset of the wirebound terminal after which the wirebound network reestablishes the involved half of the connection to
30 the meeting point using a meeting point identity stored in either the terminal or in the system.



Another embodiment of the present invention provides handoff in personal communication systems (PCS) which traditionally do not provide for handoffs, by using reestablishment to a meeting point in a similar way as described above.

5 Brief Description of the Drawings


The present invention will now be described in more detail with reference to the preferred embodiments of the invention, given only by way of example, and illustrated in the accompanying drawings, in which:

- 10 Figure 1 illustrates a prior art method for reestablishing a call;
- Figure 2 illustrates one embodiment of the present invention;
- Figure 3 illustrates another embodiment of the present invention;
- 15 Figure 4 illustrates a flow chart describing the steps of the reestablishment routine disclosed in the present invention;
- Figure 5 illustrates a mobile radio station according to one embodiment of the present invention;
- Figure 6 illustrates another embodiment of the present
- 20 invention; and
- Figure 7 illustrates a flow chart describing the steps of one embodiment of the present invention.

Detailed Description of the Preferred Embodiments


- While the following description is in the context of cellular
- 25 communication systems involving portable or mobile radio telephones and/or personal communication networks, it will be understood by those skilled in the art that the present invention may be applied to other communications applications.

This Sheet Has Been Replaced



In the present invention, the parties of a call are connected to a meeting point, according to the meeting principle disclosed in U.S. Patent Application No. 08/018,223, entitled "Method of Organizing Communication" and U.S. Patent Application No. 08/018,268, entitled "Method of Establishing Cooperation with a Functionality" which are commonly assigned and are incorporated herein by reference. Briefly, according to the meeting principle, a call is set up as two different connections to a meeting point in the network. As a result, the parties of a call are connected to each other at the meeting point. A meeting organizer or service node selects the meeting point and transmits interaction numbers to each party of the call, wherein the interaction number identifies the meeting point. The interaction numbers are stored in the respective terminal or in the respective switch nearest to the subscriber and used for call reestablishment, if required, by calling the meeting point again. In this embodiment of the present invention, the interaction numbers are maintained active for the whole duration of the call and are not cancelled after the call setup since they must be used during call reestablishment. In addition, the interaction numbers remain active after the termination of the call for a predetermined period of time. The predetermined period of time can vary depending on the situation, for example, the terminal being the calling or called terminal, the disconnection being caused by going on-hook or not, etc.

Figure 2 illustrates one embodiment of the present invention. In this embodiment, a standard telephone 212 communicates via a public switched telephone network PSTN and a cellular radio communication system with a mobile radio station 204 through a service node 207 at a meeting point. The cellular radio communication system includes two mobile services switching centers 209 and 203, respectively, and two base stations 201 and 202. In this embodiment, while the first base station 201 is connected to the mobile services switching center 209 and



the second base station is connected to the mobile services switching center 203, the present invention is not limited thereto and the two base stations could also be connected to the same mobile services switching center.

5 In Figure 2, the mobile station 204 is communicating with telephone 212 through base station 201. However, in this example, the mobile station is moving toward base station 202 and it may become necessary to handoff the mobile station 204 from base station 201 to base station 202. However, if the
10 mobile station 204 is disconnected from the base station 201 before receiving a handoff order to the new base station 202, the mobile station initiates the following reestablishment routine which is illustrated in Figure 4. In this reestablishment routine, the mobile station 204 scans the signal
15 strength of surrounding base stations in step 401 and selects the base station with the highest signal strength in step 403. The mobile station then accesses the selected base station in step 405 and initiates a new call back to the service node 207 (which in this case is assumed to be identical to the meeting
20 point) using in step 407 an interaction number stored at call setup in the mobile station 204. The selected base station then assigns a traffic channel to the mobile station 204 according to a known call setup procedure in step 409 and the service node 207 reconnects the mobile station 204 to the
25 remaining segment of the call at the meeting point in step 411.

Figure 3 illustrates another embodiment of the present invention for radio in the local loop (RLL) or telepoint systems. Telepoint and RLL systems are characterized by the
30 fact that they do not include mobile services switching centers and that the base stations are connected directly to the public switched telephone network PSTN. In these systems, handoffs are not provided since the system does not include mobile services switching centers. According to this em-



bodiment of the present invention, call reestablishment may be used whenever a call has been lost or if the call has poor quality, thereby providing a substitute for the lacking handoff function.

- 5 In Figure 3, the cellular radio system includes two base stations 301 and 302 which are connected to a service node 307 via the public switched telephone network. When a mobile station 304 is accidentally disconnected or when the user of the mobile station considers the quality of the call to be
- 10 unsatisfactory, the mobile station 304 scans surrounding base stations and selects the base station with the highest signal strength. The mobile station 304 then accesses the selected base station and initiates a call back to the service node 307 using an interaction number stored in the mobile station 304.
- 15 The selected base station then assigns a traffic channel to the mobile station 304 according to a known call setup procedure and the service node 307 reconnects the mobile station 304 to the remaining segment of the call which is parked in service node 307.
- 20 In one embodiment of the present invention, reestablishment may be initiated automatically when the quality of the connection has been below a predetermined level for a predetermined period of time. The need for handoff may be due to the subscriber moving or to a disturbance on the radio channel
- 25 which is used for the connection. In addition, the reestablishment routine may be manually initiated by the user of the mobile station when the user considers the quality of the connection to be unacceptable by depressing at least one key on a keyset on the radio mobile terminal. The quality of the
- 30 connection may be measured as the bit error rate BER and can be measured at either the mobile station or the base station. Furthermore, initiating reestablishment may be performed by going on hook and off hook and then setting up a new call to the service node 207 by entering as an interaction number the



service node's secret telephone number which may have been prestored in the short number memory of the terminal.

Going on-hook and then off-hook again within a certain period of time also introduces a new "repenting function" in the network wherein if a subscriber repents after going on-hook, he may go off-hook again within the predetermined period of time and reestablish the call by pressing a predetermined key on the keyset, provided the other participant is still off-hook. It should be understood that the interaction number may be specific for each call, or if an "electronic secretary" is used as a meeting point, a fixed secret number. This is explained in the U.S. patent applications which have been included herein by reference.

Figure 5 illustrates a mobile radio station according to one embodiment of the present invention. The mobile station 500 has an antenna 510. A transmitter 520 is connected to the antenna 510 and is controlled by a transmitter control unit 552. The transmitter is also connected to a signal processing unit 540. The receiver 530 is also connected to the antenna and is used in time multiplexing together with the transmitter. The receiver 530 is also connected to the signal processing unit 540. The radio equipment for modulating and equalizing purposes is included in blocks 520 and 530. The signal processing unit 540 includes equipment for channel coding, channel decoding, and signal processing of incoming and outgoing speech. The signal processing unit 540 is also connected to a microphone and speaker 541 and to control logic 550. In turn, the control logic 550 is connected to the transmitter control unit 552 and to IO 553 which adapts the signals from the keyboard and to a display window 560.

The invention is implemented in the form of a program sequence in the control logic 550 and has been designated 551, "re-establishing logic". The control logic 550 monitors the

connection according to methods well known in the art and when it detects that the connection has been lost the control logic initiates a call to a telephone number stored in the re-establishing logic 551. This telephone number may be the
5 predetermined "secret" number of the service node or electronic secretary which may have been entered into block 551 via the keyset of the mobile radio terminal or in some other manner. The telephone number may have alternatively been entered into block 551 from the network when setting up the
10 call, e.g., by a message on the FACCH giving the IA number of the meeting point relating to the established call. In addition to the automatic reestablishment described above, a call may be reestablished manually by the subscriber pressing a predetermined sequence of keys causing the reestablishment
15 to be activated in spite of the fact that supervising logic of block 550 does not consider the connection to be broken. As a result, a subscriber can activate the reestablishment routine when the subscriber believes that the present connection has unsatisfactory quality.

20 Figures 6 and 7 illustrate one embodiment of the present invention wherein the reestablishment routine can be manually initiated after a normal termination of a wirebound terminal. In Figure 6, two wirebound telephone terminals 601 and 641 are currently communicating with each other via their respective
25 local switches 610 and 630 and via a service node and meeting point 620. At the meeting point, the two halves of the call, identified by their respective interaction numbers, are connected together as indicated by the link 621. The local switches 610 and 630 have subscriber interface circuits 611
30 and 631, switches 612 and 632, and processing systems 613 and 633 with associated call memories 614 and 634, wherein the respective interaction numbers are stored during the call and for a predetermined period of time after the call has been terminated.

This Sheet Has Been Replaced




Figure 7 is a flow chart illustrating the events that occur when the call in progress experiences an unwanted disconnection in step 701, i.e., if a child depresses the on-hook contact while the user is speaking on the phone. After the
5 unwanted disconnection, the user depresses a predefined key or sequence of keys or uses the on-hook contact followed by some keys, for example, "on-hook contact, #, 7", which indicates a request for reestablishment of the call. The associated local switch reacts to this request in step 703 by
10 looking up in the memory 614 for terminal 601 or in the memory 634 for terminal 641 whether the subscriber in question has an active call record with an interaction number. If the answer is yes, the call to the meeting point 620 is reestablished in step 704 by the respective local switch 610 or 630. If the
15 answer is no, an acoustical signal is given to the subscriber in step 705 to indicate that the connection can not be reestablished. It is also possible for the subscriber who did not cause the interruption to request reestablishment. This leads to the same sequence of events describe above, since the
20 local exchange can not distinguish which half of the call needs to be reconnected.

While a particular embodiment of the present invention has been described and illustrated, it should be understood that the invention is not limited thereto since modifications may
25 be made by persons skilled in the art. The present application contemplates any and all modifications that fall within the spirit and scope of the underlying invention disclosed and claimed herein.



WHAT IS CLAIMED IS:

1. A method for reestablishing a call after the call has been disconnected involving a radio mobile terminal in a communication system, wherein a communication path is
5 established by a service node which selects a meeting point at which the parties of the call are connected together, said method comprising the steps of:
 - scanning the signal strength of surrounding base
stations at the disconnected radio mobile terminal;
 - 10 selecting a base station based on signal strength;
 - accessing the selected base station by said radio mobile terminal;
 - initiating a new call back to said meeting point, wherein said radio mobile terminal initiates said call back;
 - 15 assigning a traffic channel to said radio mobile terminal by said base station; and
 - reconnecting the radio mobile terminal to said meeting point.
2. A method for reestablishing a call after a call has been
20 disconnected according to claim 1, wherein said radio mobile terminal initiates the call back to said meeting point by using an interaction number.
3. A method for reestablishing a call after the call has been disconnected according to claim 2, wherein said interac-
25 tion number is sent to said radio mobile terminal during call setup and is stored in said radio mobile terminal.
4. A method for reestablishing a call after the call has been disconnected according to claim 2, wherein said interac-
tion number is inserted semi-permanently via a key set on said
30 radio mobile terminal.

This Sheet Has Been Replaced



5. A method for reestablishing a call after the call has been disconnected according to claim 1, wherein said new call is initiated automatically after the call has been disconnected.
- 5 6. A method for reestablishing a call after the call has been disconnected according to claim 1, wherein said new call is initiated after the call has been disconnected and a subscriber depresses at least one key on a keyset on said radio mobile terminal.
- 10 7. An apparatus for reestablishing a call after the call has been disconnected in a communication system wherein a communication path is established by a service node which selects a meeting point at which the parties of a call are connected together, comprising:
- 15 means for scanning signal strength of surrounding base stations in a radio mobile terminal;
means for selecting the base station with the highest signal strength;
means for accessing the selected base station by said
20 radio mobile terminal;
means for initiating a new call back to said meeting point, wherein the radio mobile terminal initiates the call back;
means for assigning a traffic channel to said radio
25 mobile terminal; and
means for reconnecting the radio mobile terminal to said call.
8. An apparatus for reestablishing a call after the call has been disconnected according to claim 7, wherein said radio
30 mobile terminal initiates the call back to the meeting point by using an interaction number.





9. An apparatus for reestablishing a call after the call has been disconnected according to claim 8, wherein said interaction number is sent to said radio mobile terminal during call setup and is stored in said radio mobile terminal.
- 5 10. An apparatus for reestablishing a call after the call has been disconnected according to claim 8, wherein said interaction number is inserted semi-permanently via a key set on said radio mobile terminal.
11. An apparatus for reestablishing a call after the call has
10 been disconnected according to claim 7, wherein said new call is initiated automatically after the call has been disconnected.
12. An apparatus for reestablishing a call after the call has been disconnected according to claim 7, wherein said new call
15 is initiated manually after the call has been disconnected and a subscriber depresses at least one key on the keyset on the radio mobile terminal.
13. A method for reestablishing a call which has bad quality involving a radio mobile terminal in a communication system,
20 wherein a communication path is established by a service node which selects a meeting point at which the parties of the call are connected together, said method comprising the steps of:
- determining whether the quality of the call has fallen below a predetermined level for a predetermined period of
25 time;
- scanning the signal strength of surrounding base stations at the radio mobile terminal when it is determined that the quality of the call has fallen below the predetermined level for the predetermined period of time;
- 30 selecting a base station based on signal strength;
- accessing the selected base station by said radio mobile terminal;





initiating a new call back to said meeting point, wherein said radio mobile terminal initiates said call back;

assigning a traffic channel to said radio mobile terminal by said base station; and

5 reconnecting the radio mobile terminal to said meeting point.

14. A method for reestablishing a call which has bad quality according to claim 13, wherein said radio mobile terminal initiates the call back to said meeting point by using an
10 interaction number.


15. A method for reestablishing a call which has bad quality according to claim 14, wherein said interaction number is sent to said radio mobile terminal during call setup and is stored in said radio mobile terminal.

15 16. A method for reestablishing a call which has bad quality according to claim 14, wherein said interaction number is inserted semi-permanently via a key set on said radio mobile terminal.

17. A method for reestablishing a call which has bad quality
20 according to claim 13, wherein said new call is initiated after the quality of the call has fallen below the predetermined level for a predetermined period of time and a subscriber depresses at least one key on a keyset on said radio mobile terminal.

25 18. An apparatus for reestablishing a call which has bad quality in a communication system wherein a communication path is established by a service node which selects a meeting point at which the parties of a call are connected together, comprising:

This Sheet Has Been Replaced





means for determining whether the quality of the call has fallen below a predetermined level for a predetermined period of time;

5 means for scanning signal strength of surrounding base stations in a radio mobile terminal after it has been determined that the quality of the call has fallen below the predetermined level for a predetermined period of time;

means for selecting the base station with the highest signal strength;

10 means for accessing the selected base station by said radio mobile terminal;

means for initiating a new call back to said meeting point, wherein the radio mobile terminal initiates the call back;

15 means for assigning a traffic channel to said radio mobile terminal; and

means for reconnecting the radio mobile terminal to said call.

19. An apparatus for reestablishing a call which has bad
20 quality according to claim 18, wherein said radio mobile terminal initiates the call back to the meeting point by using an interaction number.

20. An apparatus for reestablishing a call which has bad
25 quality according to claim 19, wherein said interaction number is sent to said radio mobile terminal during call setup and is stored in said radio mobile terminal.

21. An apparatus for reestablishing a call which has bad
quality according to claim 19, wherein said interaction number
is inserted semi-permanently via a key set on said radio
30 mobile terminal.

22. An apparatus for reestablishing a call which has bad
quality according to claim 18, wherein said new call is



initiated manually after the quality of the call has fallen below the predetermined level for the predetermined period of time and a subscriber depresses at least one key on the keyboard on the radio mobile terminal.

- 5 23. A method for reestablishing a call after a normal termination involving a wirebound terminal in a communication system wherein a communication path is established by a service node which selects a meeting point at which the parties of the call are connected together, said method
10 comprising the steps of:

depressing a predetermined key or sequence of keys on a keyset on said wirebound terminal after the call has been terminated;

- determining whether the wirebound terminal has an active
15 call record with an interaction number; and

reconnecting said wirebound terminal to said meeting point.

24. A method for reestablishing a call after a normal termination according to claim 23, wherein said call record
20 remains active after the termination for a predetermined period of time.

25. A method for reestablishing a call after a normal termination according to claim 23, wherein either party can initiate the reestablishment method.

- 25 26. A method for reestablishing a call after a normal termination according to claim 23, wherein said wirebound terminal generates an acoustic signal when the call can not be reestablished.

27. An apparatus for reestablishing a call after a normal
30 termination involving a wirebound terminal in a communication system wherein a communication path is established by a



service node which selects a meeting point at which the parties of the call are connected together, comprising:

means on said wirebound terminal for initiating the reestablishment procedure after the call has been terminated;

5 means for determining whether the wirebound terminal has an active call record with an interaction number; and

means for reconnecting said wirebound terminal to said meeting point.


28. An apparatus for reestablishing a call after a normal
10 termination according to claim 27, wherein said call record remains active after the termination for a predetermined period of time.

29. An apparatus for reestablishing a call after a normal
15 termination according to claim 27, wherein either party can initiate the reestablishment procedure.

30. An apparatus for reestablishing a call after a normal termination according to claim 27, wherein said wirebound terminal generates an acoustical signal when said call can not be reconnected.

20 31. An apparatus for reestablishing a call after a normal termination according to claim 27, wherein the reestablishment procedure is initiated by depressing at least one predetermined key on a keyset on said wirebound terminal.

This Sheet Has Been Replaced



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ :

H04Q 7/04

A1

(11) International Publication Number:

WO 94/28689

(43) International Publication Date:

8 December 1994 (08.12.94)

(21) International Application Number: PCT/SE94/00474

(22) International Filing Date: 20 May 1994 (20.05.94)

(30) Priority Data:

08/063,976

20 May 1993 (20.05.93)

US

(81) Designated States: AU, CA, CN, FI, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON
[SE/SE]; S-126 25 Stockholm (SE).


(72) Inventors: GHISLER, Walter; Båtsmansvägen 21, S-194 41
Upplands Väsby (SE). JONSSON, Björn, Erik, Rutger;
Dimvägen 36, S-175 38 Järfälla (SE).

(74) Agents: LÖVGREN, Tage et al.; Telefonaktiebolaget LM
Ericsson, S-126 25 Stockholm (SE).

(54) Title: REESTABLISHMENT OF CALL AFTER DISCONNECT

(57) Abstract

A method and apparatus for reestablishing a call after a call has been disconnected or after the quality of the call has become bad is disclosed. A disconnected mobile station scans the signal strength of surrounding base stations and accesses the base station with the highest signal strength. The mobile station then initiates a new call back to a service node. The base station then assigns the mobile station a traffic channel and the service node reconnects the call. In addition, a method for reestablishing a call in any communication network after the call has been terminated in a normal fashion is disclosed.

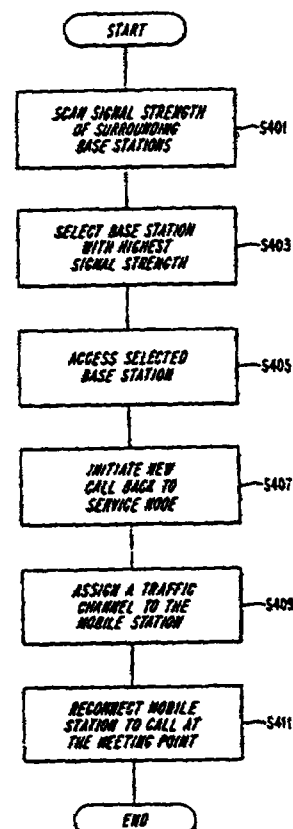


This Sheet Has Been Replaced



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				



1 / 4

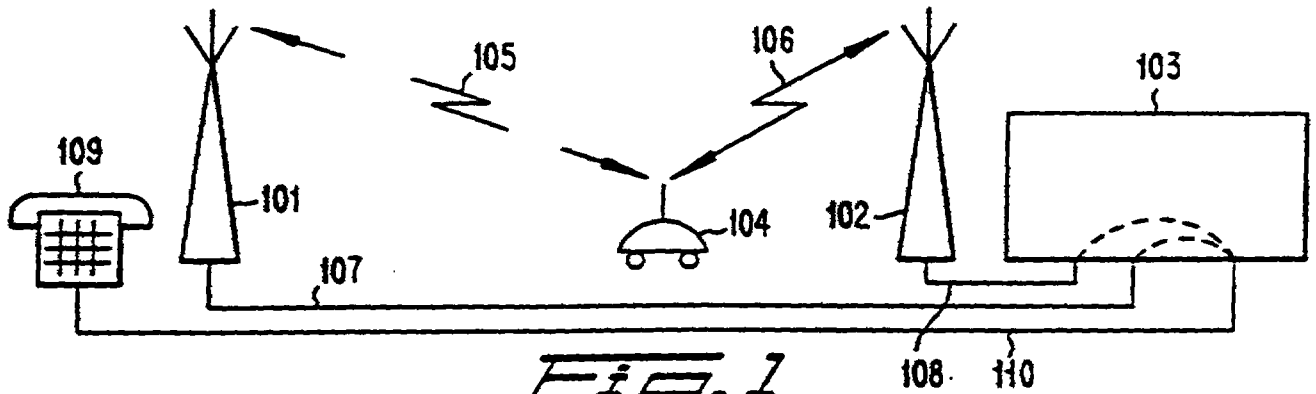


FIG. 1
(PRIOR ART)

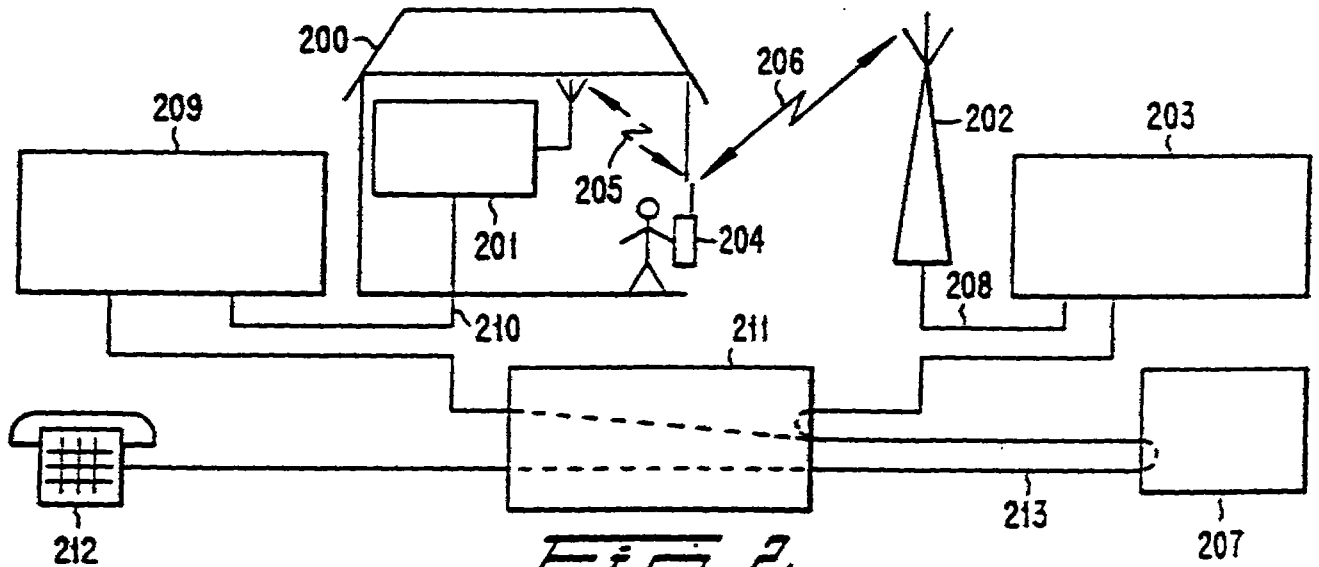


FIG. 2

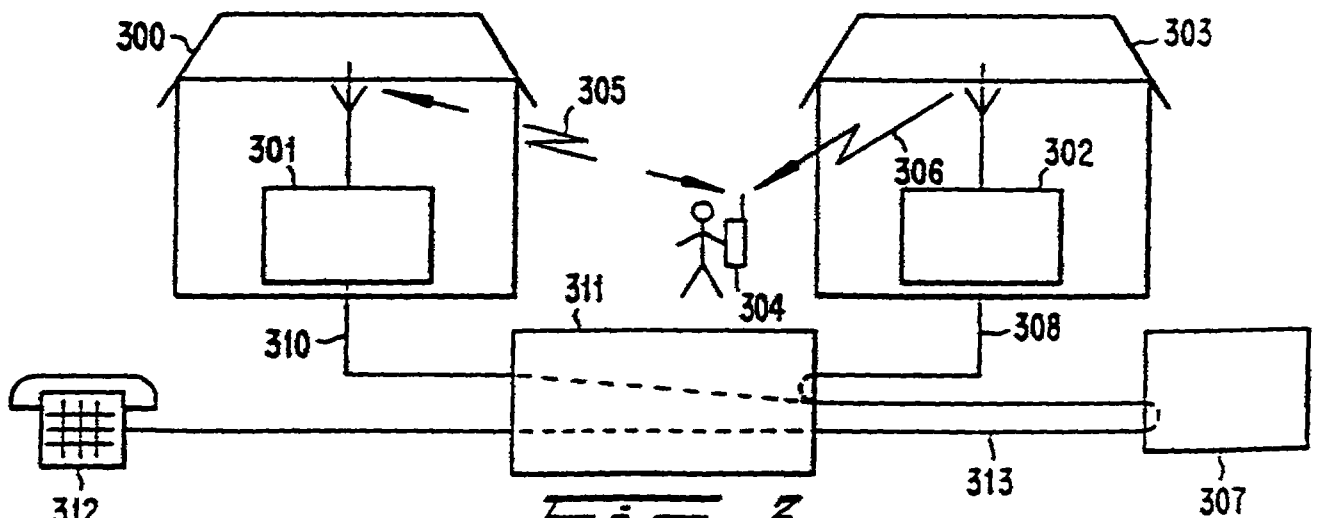
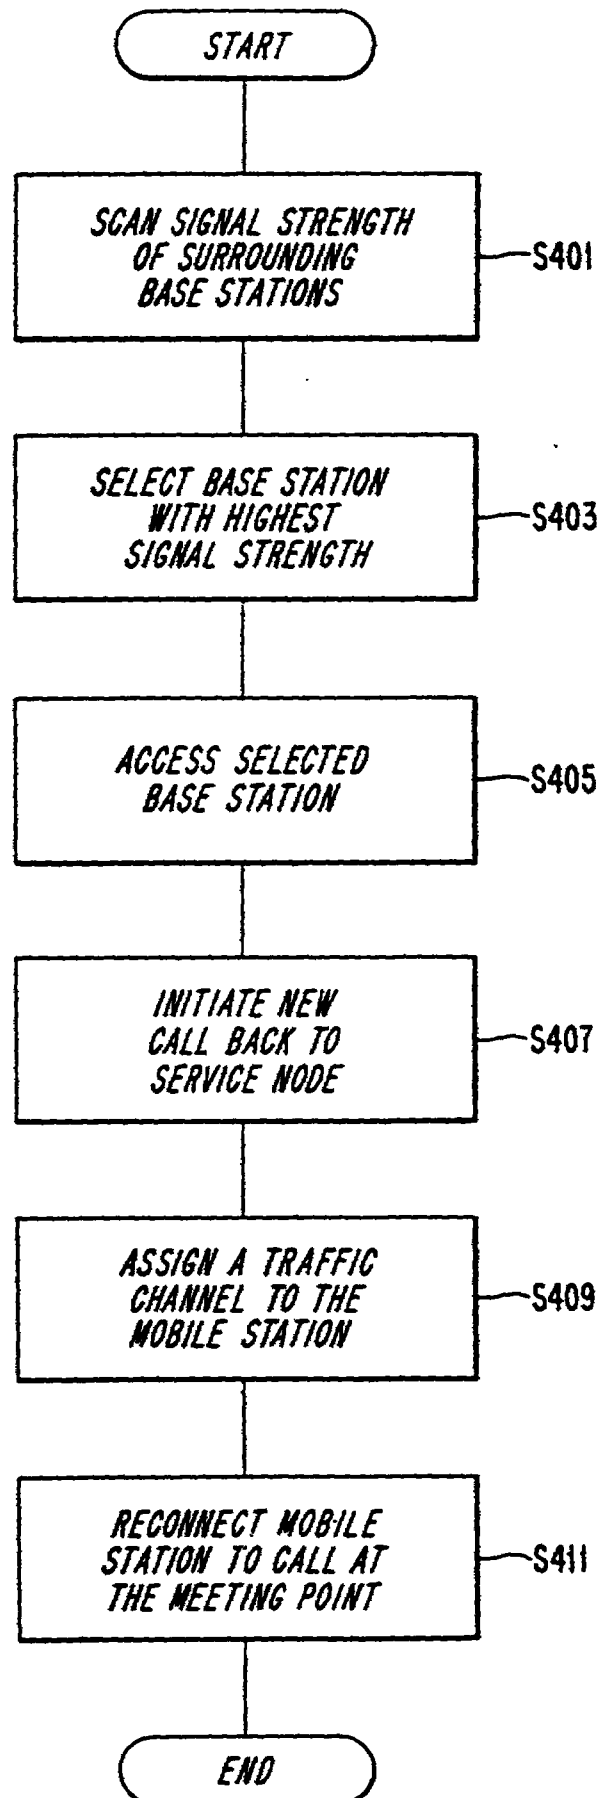



FIG. 3

2 / 4

FIG. 4

This Sheet Has Been Replaced

**SUBSTITUTE SHEET**

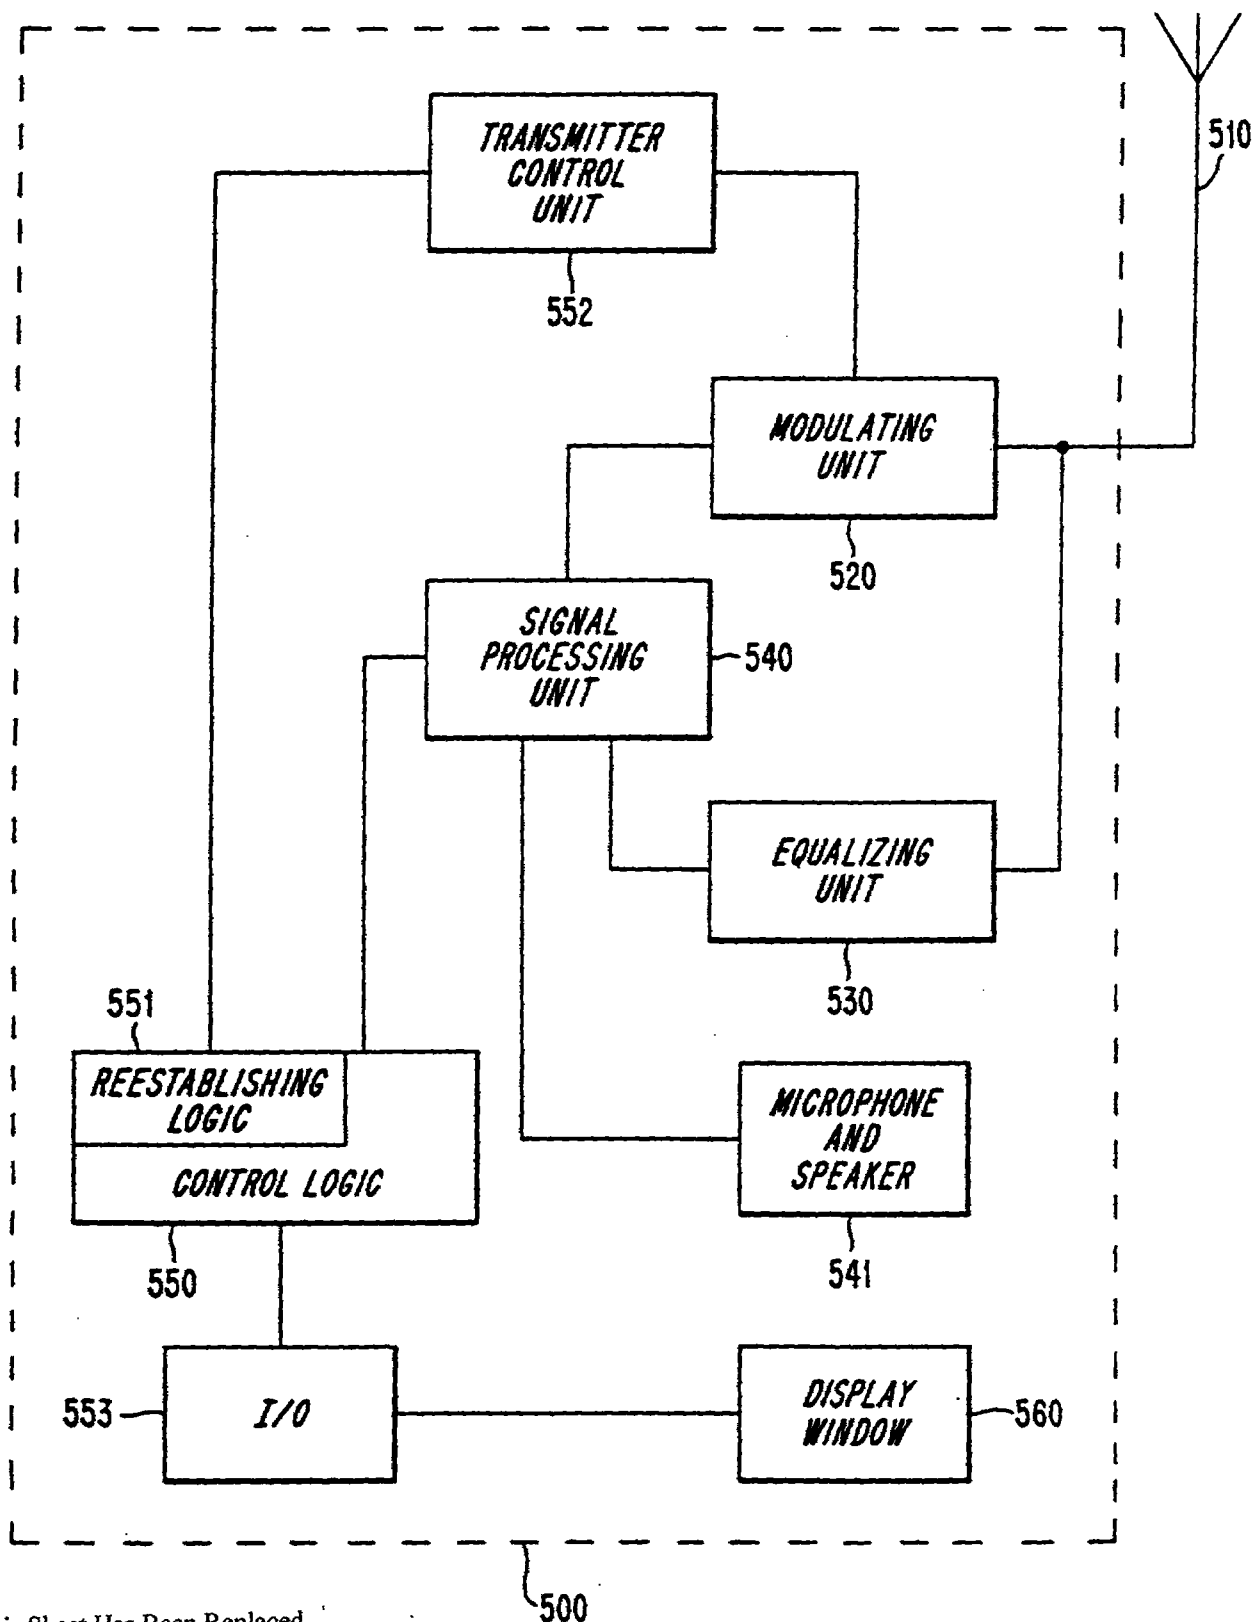Fig. 5

This Sheet Has Been Replaced

**SUBSTITUTE SHEET**

4 / 4

Fig. 6


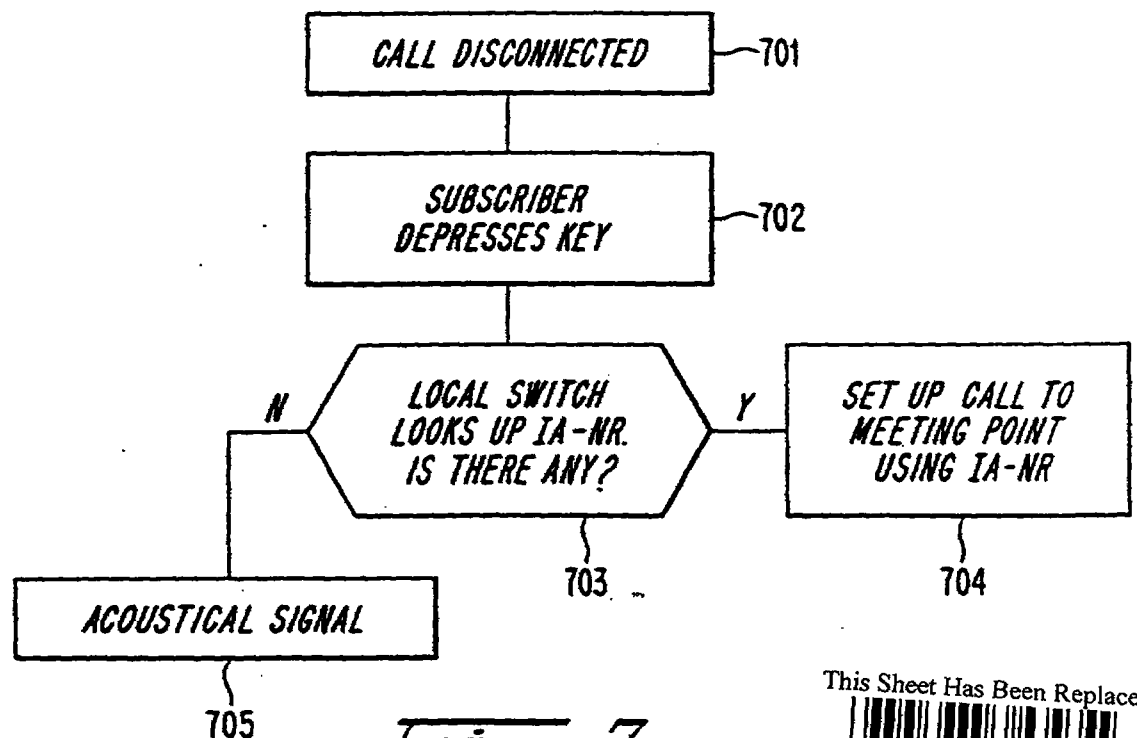


Fig. 7

This Sheet Has Been Replaced

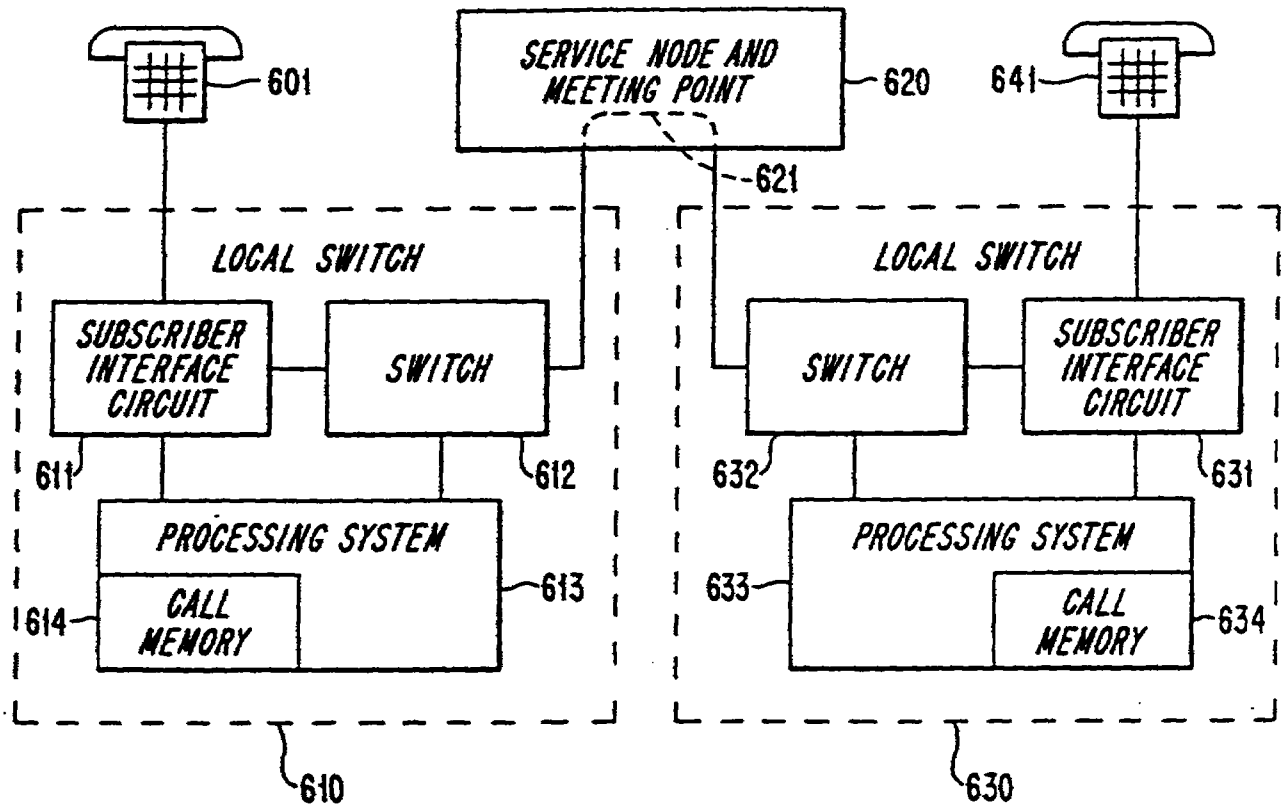

REPLACEMENT SHEETS
☒ Description : paged ... to paged ...
☒ Claim(s) : paged ... to paged ...
☒ Drawing(s) : paged ... to paged ...
☒ Abstract : paged ... to paged ...

DATE OF RECEIPT 25/2/97

1

REESTABLISHMENT OF CALL AFTER DISCONNECT

REPLACEMENT SHEET

25 FEB 1997

Field of the Invention

The present invention relates to any communication system and in particular to mobile radio communication systems. The present invention provides to a generic call reestablishment procedure when a connection is unwillfully lost or when the quality of the call is bad. The present invention also provides for associated apparatus.

Background of the Invention


10 In cellular mobile radio systems, it is not unusual for a radio connection to be lost. The radio connection can be lost for a variety of reasons including fading when the mobile station is standing still, radio shadow from large buildings or tunnels, a handoff to a radio channel which can not support
15 the new connection or when a base station breaks down or for some emergency must be switched off. As a result, a reestablishment routine is used in cellular systems to reconnect the lost connection.

Figure 1 illustrates a prior art system for reestablishing a
20 call in a cellular radio system. In this example, a standard telephone 109 communicates via a public switched telephone network PSTN (not shown) and a cellular radio communication system with a mobile radio station 104. The cellular radio communication system includes two radio base stations 101 and
25 102, which are both connected to the same mobile services switching center 103 by connections 107 and 108, respectively. In Figure 1, the mobile station 104 is communicating with telephone 109 through base station 101. When the mobile station is moving toward the base station 102, it may become
30 necessary to handoff the mobile station 104 from base station

REPLACED SHEETS SG

☐ Description : paged to paged
☒ Claim(s) : paged ... to paged ...
☐ Drawing(s) : paged to paged
☒ Abstract : paged ... to paged ...

DATE OF RECEIPT

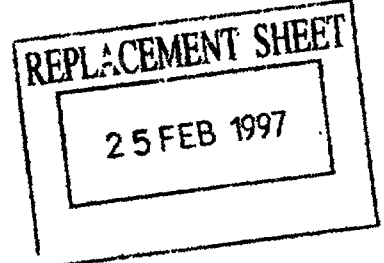

101 to base station 102. However, if the mobile station 104 is disconnected from the base station 101 before receiving a handoff order to the new base station 102, the mobile station may initiate a reestablishment routine.

5 In this known reestablishment routine, the mobile station 104 scans the signal strengths of the surrounding base stations and selects the base station with the highest or next highest signal strength. The mobile station 104 then accesses the selected base station, base station 102 in this example, and
10 requests to be reconnected. The selected base station reports the request for reconnection to the mobile services switching center 103. The mobile services switching center 103 then orders the selected base station to assign a traffic channel to the mobile station 104, and the mobile services switching
15 center 103 then connects the mobile station to the remaining segment of the call which has been parked in the mobile services switching center 103.

In the European cellular mobile radio system (GSM), a call reestablishment procedure has been standardized which
20 provides for call reestablishment within the same mobile services switching center. According to this standard, the mobile station accesses the best or next best base station and requests a reconnection which is provided if the accessed base station is connected to the same mobile services switching
25 center as the original base station. However, this reestablishment routine is problematic in the sense that if the accessed base station is not connected to the same mobile services switching center, the reconnection can not be provided. For example, a subscriber with a hand held mobile
30 station may enter or leave a building, thereby losing contact with its base station and enter an overlay network with another mobile services switching center. As a result, if the mobile station loses its connection with the base station, the call can not be reestablished. Furthermore, in non-cellular

systems, an unwillful disconnection of a call associated with a wire-bound terminal in a PABX or in the public switched telephone network PSTN, can only be reconnected by redialing. A faster method for reestablishing a call which does not
5 require the user going on hook and redialing the number would therefore be welcome.

Summary of the Disclosure

It is an object of the present invention to provide a method for reestablishing a call after a call has been disconnected
10 in a communication system, wherein a communication path is established by a service node which selects a meeting point at which the parties of a call are connected together. In the reestablishment routine disclosed in one embodiment of the present invention, after a radio mobile terminal has been
15 disconnected, the radio mobile terminal scans the signal strength of surrounding base stations and selects the base station with the highest signal strength. The radio mobile terminal then accesses the selected base station and initiates a call back to the meeting point. The base station then
20 assigns a traffic channel to the radio mobile terminal and the network reconnects the radio mobile terminal to the meeting point, thereby reestablishing the call.

Another embodiment of the present invention provides the option of reestablishing a call within a certain period of
25 time after a call is willfully or unwillfully disconnected involving a wirebound terminal. The reconnection can be requested by pressing a predetermined key or keys on the keypad of the wirebound terminal after which the wirebound network reestablishes the involved half of the connection to
30 the meeting point using a meeting point identity stored in either the terminal or in the system.

Another embodiment of the present invention provides handoff in personal communication systems (PCS) which traditionally do not provide for handoffs, by using reestablishment to a meeting point in a similar way as described above.

5 Brief Description of the Drawings

The present invention will now be described in more detail with reference to the preferred embodiments of the invention, given only by way of example, and illustrated in the accompanying drawings, in which:


- 10 Figure 1 illustrates a prior art method for reestablishing a call;
- Figure 2 illustrates one embodiment of the present invention;
- Figure 3 illustrates another embodiment of the present invention;
- 15 Figure 4 illustrates a flow chart describing the steps of the reestablishment routine disclosed in the present invention;
- Figure 5 illustrates a mobile radio station according to one embodiment of the present invention;
- Figure 6 illustrates another embodiment of the present
- 20 invention; and
- Figure 7 illustrates a flow chart describing the steps of one embodiment of the present invention.

Detailed Description of the Preferred Embodiments

- While the following description is in the context of cellular
- 25 communication systems involving portable or mobile radio telephones and/or personal communication networks, it will be understood by those skilled in the art that the present invention may be applied to other communications applications.

In the present invention, the parties of a call are connected to a meeting point, according to the meeting principle disclosed in U.S. Patent Application No. 08/018,223, entitled "Method of Organizing Communication" and U.S. Patent Application No. 08/018,268, entitled "Method of Establishing Cooperation with a Functionality" which are commonly assigned and are incorporated herein by reference. Briefly, according to the meeting principle, a call is set up as two different connections to a meeting point in the network. As a result, the parties of a call are connected to each other at the meeting point. A meeting organizer or service node selects the meeting point and transmits interaction numbers to each party of the call, wherein the interaction number identifies the meeting point. The interaction numbers are stored in the respective terminal or in the respective switch nearest to the subscriber and used for call reestablishment, if required, by calling the meeting point again. In this embodiment of the present invention, the interaction numbers are maintained active for the whole duration of the call and are not cancelled after the call setup since they must be used during call reestablishment. In addition, the interaction numbers remain active after the termination of the call for a predetermined period of time. The predetermined period of time can vary depending on the situation, for example, the terminal being the calling or called terminal, the disconnection being caused by going on-hook or not, etc.

Figure 2 illustrates one embodiment of the present invention. In this embodiment, a standard telephone 212 communicates via a public switched telephone network PSTN and a cellular radio communication system with a mobile radio station 204 through a service node 207 at a meeting point. The cellular radio communication system includes two mobile services switching centers 209 and 203, respectively, and two base stations 201 and 202. In this embodiment, while the first base station 201 is connected to the mobile services switching center 209 and

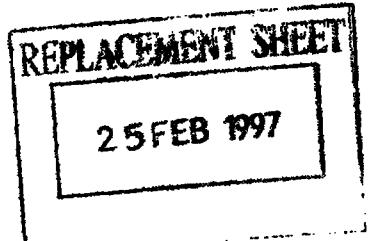


the second base station is connected to the mobile services switching center 203, the present invention is not limited thereto and the two base stations could also be connected to the same mobile services switching center.

5 In Figure 2, the mobile station 204 is communicating with telephone 212 through base station 201. However, in this example, the mobile station is moving toward base station 202 and it may become necessary to handoff the mobile station 204 from base station 201 to base station 202. However, if the
10 mobile station 204 is disconnected from the base station 201 before receiving a handoff order to the new base station 202, the mobile station initiates the following reestablishment routine which is illustrated in Figure 4. In this reestablishment routine, the mobile station 204 scans the signal
15 strength of surrounding base stations in step 401 and selects the base station with the highest signal strength in step 403. The mobile station then accesses the selected base station in step 405 and initiates a new call back to the service node 207 (which in this case is assumed to be identical to the meeting
20 point) using in step 407 an interaction number stored at call setup in the mobile station 204. The selected base station then assigns a traffic channel to the mobile station 204 according to a known call setup procedure in step 409 and the service node 207 reconnects the mobile station 204 to the
25 remaining segment of the call at the meeting point in step 411.

Figure 3 illustrates another embodiment of the present invention for radio in the local loop (RLL) or telepoint systems. Telepoint and RLL systems are characterized by the
30 fact that they do not include mobile services switching centers and that the base stations are connected directly to the public switched telephone network PSTN. In these systems, handoffs are not provided since the system does not include mobile services switching centers. According to this em-

bodiment of the present invention, call reestablishment may be used whenever a call has been lost or if the call has poor quality, thereby providing a substitute for the lacking handoff function.

- 5 In Figure 3, the cellular radio system includes two base stations 301 and 302 which are connected to a service node 307 via the public switched telephone network. When a mobile station 304 is accidentally disconnected or when the user of the mobile station considers the quality of the call to be
- 10 unsatisfactory, the mobile station 304 scans surrounding base stations and selects the base station with the highest signal strength. The mobile station 304 then accesses the selected base station and initiates a call back to the service node 307 using an interaction number stored in the mobile station 304.
- 15 The selected base station then assigns a traffic channel to the mobile station 304 according to a known call setup procedure and the service node 307 reconnects the mobile station 304 to the remaining segment of the call which is parked in service node 307.
- 20 In one embodiment of the present invention, reestablishment may be initiated automatically when the quality of the connection has been below a predetermined level for a predetermined period of time. The need for handoff may be due to the subscriber moving or to a disturbance on the radio channel
- 25 which is used for the connection. In addition, the reestablishment routine may be manually initiated by the user of the mobile station when the user considers the quality of the connection to be unacceptable by depressing at least one key on a keyset on the radio mobile terminal. The quality of the
- 30 connection may be measured as the bit error rate BER and can be measured at either the mobile station or the base station. Furthermore, initiating reestablishment may be performed by going on hook and off hook and then setting up a new call to the service node 207 by entering as an interaction number the

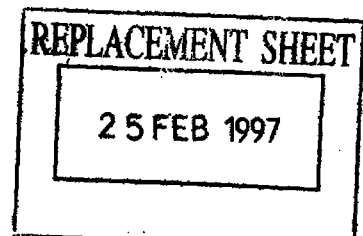

25 FEB 1997

service node's secret telephone number which may have been prestored in the short number memory of the terminal.

Going on-hook and then off-hook again within a certain period of time also introduces a new "repenting function" in the network wherein if a subscriber repents after going on-hook, he may go off-hook again within the predetermined period of time and reestablish the call by pressing a predetermined key on the keyset, provided the other participant is still off-hook. It should be understood that the interaction number may be specific for each call, or if an "electronic secretary" is used as a meeting point, a fixed secret number. This is explained in the U.S. patent applications which have been included herein by reference.

Figure 5 illustrates a mobile radio station according to one embodiment of the present invention. The mobile station 500 has an antenna 510. A transmitter 520 is connected to the antenna 510 and is controlled by a transmitter control unit 552. The transmitter is also connected to a signal processing unit 540. The receiver 530 is also connected to the antenna and is used in time multiplexing together with the transmitter. The receiver 530 is also connected to the signal processing unit 540. The radio equipment for modulating and equalizing purposes is included in blocks 520 and 530. The signal processing unit 540 includes equipment for channel coding, channel decoding, and signal processing of incoming and outgoing speech. The signal processing unit 540 is also connected to a microphone and speaker 541 and to control logic 550. In turn, the control logic 550 is connected to the transmitter control unit 552 and to IO 553 which adapts the signals from the keyboard and to a display window 560.


The invention is implemented in the form of a program sequence in the control logic 550 and has been designated 551, "re-establishing logic". The control logic 550 monitors the

connection according to methods well known in the art and when it detects that the connection has been lost the control logic initiates a call to a telephone number stored in the re-establishing logic 551. This telephone number may be the predetermined "secret" number of the service node or electronic secretary which may have been entered into block 551 via the keyset of the mobile radio terminal or in some other manner. The telephone number may have alternatively been entered into block 551 from the network when setting up the call, e.g., by a message on the FACCH giving the IA number of the meeting point relating to the established call. In addition to the automatic reestablishment described above, a call may be reestablished manually by the subscriber pressing a predetermined sequence of keys causing the reestablishment to be activated in spite of the fact that supervising logic of block 550 does not consider the connection to be broken. As a result, a subscriber can activate the reestablishment routine when the subscriber believes that the present connection has unsatisfactory quality.

Figures 6 and 7 illustrate one embodiment of the present invention wherein the reestablishment routine can be manually initiated after a normal termination of a wirebound terminal. In Figure 6, two wirebound telephone terminals 601 and 641 are currently communicating with each other via their respective local switches 610 and 630 and via a service node and meeting point 620. At the meeting point, the two halves of the call, identified by their respective interaction numbers, are connected together as indicated by the link 621. The local switches 610 and 630 have subscriber interface circuits 611 and 631, switches 612 and 632, and processing systems 613 and 633 with associated call memories 614 and 634, wherein the respective interaction numbers are stored during the call and for a predetermined period of time after the call has been terminated.

Figure 7 is a flow chart illustrating the events that occur when the call in progress experiences an unwanted disconnection in step 701, i.e., if a child depresses the on-hook contact while the user is speaking on the phone. After the unwanted disconnection, the user depresses a predefined key or sequence of keys or uses the on-hook contact followed by some keys, for example, "on-hook contact, #, 7", which indicates a request for reestablishment of the call. The associated local switch reacts to this request in step 703 by looking up in the memory 614 for terminal 601 or in the memory 634 for terminal 641 whether the subscriber in question has an active call record with an interaction number. If the answer is yes, the call to the meeting point 620 is reestablished in step 704 by the respective local switch 610 or 630. If the answer is no, an acoustical signal is given to the subscriber in step 705 to indicate that the connection can not be reestablished. It is also possible for the subscriber who did not cause the interruption to request reestablishment. This leads to the same sequence of events describe above, since the local exchange can not distinguish which half of the call needs to be reconnected.


While a particular embodiment of the present invention has been described and illustrated, it should be understood that the invention is not limited thereto since modifications may be made by persons skilled in the art. The present application contemplates any and all modifications that fall within the spirit and scope of the underlying invention disclosed and claimed herein.

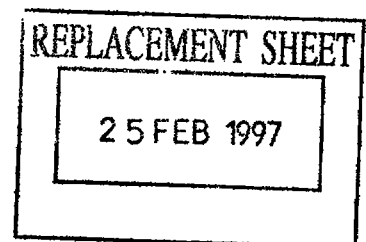



WHAT IS CLAIMED IS:

1. A method for reestablishing a call after the call has been disconnected involving a radio mobile terminal in a communication system, wherein a communication path is established by a service node which selects a meeting point at which the parties of the call are connected together, said method comprising the steps of:
 - scanning the signal strength of surrounding base stations at the disconnected radio mobile terminal;
 - 10 selecting a base station based on signal strength;
 - accessing the selected base station by said radio mobile terminal;
 - initiating a new call back to said meeting point, wherein said radio mobile terminal initiates said call back;
 - 15 assigning a traffic channel to said radio mobile terminal by said base station; and
 - reconnecting the radio mobile terminal to said meeting point.
2. A method for reestablishing a call after a call has been disconnected according to claim 1, wherein said radio mobile terminal initiates the call back to said meeting point by using an interaction number.
3. A method for reestablishing a call after the call has been disconnected according to claim 2, wherein said interaction number is sent to said radio mobile terminal during call setup and is stored in said radio mobile terminal.
4. A method for reestablishing a call after the call has been disconnected according to claim 2, wherein said interaction number is inserted semi-permanently via a key set on said radio mobile terminal.




This Sheet Has Been Replaced





5. A method for reestablishing a call after the call has been disconnected according to claim 1, wherein said new call is initiated automatically after the call has been disconnected.
- 5 6. A method for reestablishing a call after the call has been disconnected according to claim 1, wherein said new call is initiated after the call has been disconnected and a subscriber depresses at least one key on a keyset on said radio mobile terminal.
- 10 7. An apparatus for reestablishing a call after the call has been disconnected in a communication system wherein a communication path is established by a service node which selects a meeting point at which the parties of a call are connected together, comprising:
- 15 means for scanning signal strength of surrounding base stations in a radio mobile terminal;
- means for selecting the base station with the highest signal strength;
- means for accessing the selected base station by said
- 20 radio mobile terminal;
- means for initiating a new call back to said meeting point, wherein the radio mobile terminal initiates the call back;
- means for assigning a traffic channel to said radio
- 25 mobile terminal; and
- means for reconnecting the radio mobile terminal to said call.
8. An apparatus for reestablishing a call after the call has been disconnected according to claim 7, wherein said radio
- 30 mobile terminal initiates the call back to the meeting point by using an interaction number.




This Sheet Has Been Replaced





9. An apparatus for reestablishing a call after the call has been disconnected according to claim 8, wherein said interaction number is sent to said radio mobile terminal during call setup and is stored in said radio mobile terminal.
- 5 10. An apparatus for reestablishing a call after the call has been disconnected according to claim 8, wherein said interaction number is inserted semi-permanently via a key set on said radio mobile terminal.
11. An apparatus for reestablishing a call after the call has
10 been disconnected according to claim 7, wherein said new call is initiated automatically after the call has been disconnected.
12. An apparatus for reestablishing a call after the call has been disconnected according to claim 7, wherein said new call
15 is initiated manually after the call has been disconnected and a subscriber depresses at least one key on the keyset on the radio mobile terminal.
13. A method for reestablishing a call which has bad quality involving a radio mobile terminal in a communication system,
20 wherein a communication path is established by a service node which selects a meeting point at which the parties of the call are connected together, said method comprising the steps of:
- 25 determining whether the quality of the call has fallen below a predetermined level for a predetermined period of time;
- scanning the signal strength of surrounding base stations at the radio mobile terminal when it is determined that the quality of the call has fallen below the predetermined level for the predetermined period of time;
- 30 selecting a base station based on signal strength;
- accessing the selected base station by said radio mobile terminal;

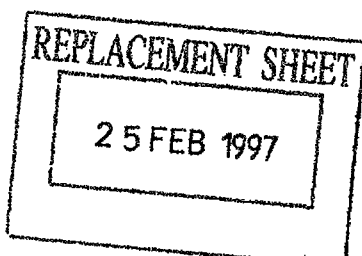

This Sheet Has Been Replaced





initiating a new call back to said meeting point, wherein said radio mobile terminal initiates said call back;

assigning a traffic channel to said radio mobile terminal by said base station; and

5 reconnecting the radio mobile terminal to said meeting point.


14. A method for reestablishing a call which has bad quality according to claim 13, wherein said radio mobile terminal initiates the call back to said meeting point by using an
10 interaction number.

15. A method for reestablishing a call which has bad quality according to claim 14, wherein said interaction number is sent to said radio mobile terminal during call setup and is stored in said radio mobile terminal.

15 16. A method for reestablishing a call which has bad quality according to claim 14, wherein said interaction number is inserted semi-permanently via a key set on said radio mobile terminal.

17. A method for reestablishing a call which has bad quality
20 according to claim 13, wherein said new call is initiated after the quality of the call has fallen below the predetermined level for a predetermined period of time and a subscriber depresses at least one key on a keyset on said radio mobile terminal.

25 18. An apparatus for reestablishing a call which has bad quality in a communication system wherein a communication path is established by a service node which selects a meeting point at which the parties of a call are connected together, comprising:

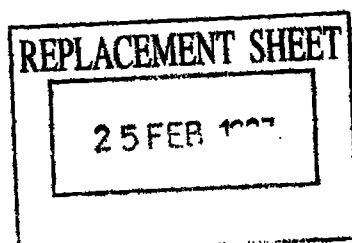



means for determining whether the quality of the call has fallen below a predetermined level for a predetermined period of time;

5 means for scanning signal strength of surrounding base stations in a radio mobile terminal after it has been determined that the quality of the call has fallen below the predetermined level for a predetermined period of time;

means for selecting the base station with the highest signal strength;

10 means for accessing the selected base station by said radio mobile terminal;

means for initiating a new call back to said meeting point, wherein the radio mobile terminal initiates the call back;

15 means for assigning a traffic channel to said radio mobile terminal; and


means for reconnecting the radio mobile terminal to said call.


19. An apparatus for reestablishing a call which has bad
20 quality according to claim 18, wherein said radio mobile terminal initiates the call back to the meeting point by using an interaction number.

20. An apparatus for reestablishing a call which has bad
25 quality according to claim 19, wherein said interaction number is sent to said radio mobile terminal during call setup and is stored in said radio mobile terminal.

21. An apparatus for reestablishing a call which has bad
30 quality according to claim 19, wherein said interaction number is inserted semi-permanently via a key set on said radio mobile terminal.

22. An apparatus for reestablishing a call which has bad quality according to claim 18, wherein said new call is

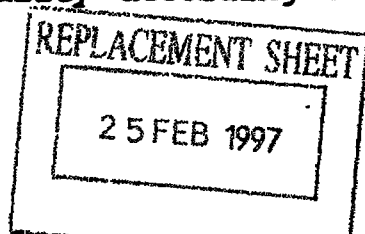

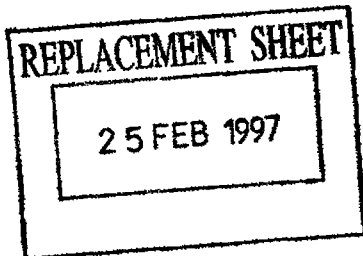

initiated manually after the quality of the call has fallen below the predetermined level for the predetermined period of time and a subscriber depresses at least one key on the keyboard on the radio mobile terminal.

- 5 23. A method for reestablishing a call after a normal termination involving a wirebound terminal in a communication system wherein a communication path is established by a service node which selects a meeting point at which the parties of the call are connected together, said method
10 comprising the steps of:

depressing a predetermined key or sequence of keys on a keyset on said wirebound terminal after the call has been terminated;

- determining whether the wirebound terminal has an active
15 call record with an interaction number; and

reconnecting said wirebound terminal to said meeting point.

24. A method for reestablishing a call after a normal termination according to claim 23, wherein said call record
20 remains active after the termination for a predetermined period of time.

25. A method for reestablishing a call after a normal termination according to claim 23, wherein either party can initiate the reestablishment method.

- 25 26. A method for reestablishing a call after a normal termination according to claim 23, wherein said wirebound terminal generates an acoustic signal when the call can not be reestablished.

27. An apparatus for reestablishing a call after a normal
30 termination involving a wirebound terminal in a communication system wherein a communication path is established by a





service node which selects a meeting point at which the parties of the call are connected together, comprising:

means on said wirebound terminal for initiating the reestablishment procedure after the call has been terminated;

5 means for determining whether the wirebound terminal has an active call record with an interaction number; and


means for reconnecting said wirebound terminal to said meeting point.

28. An apparatus for reestablishing a call after a normal
10 termination according to claim 27, wherein said call record remains active after the termination for a predetermined period of time.


29. An apparatus for reestablishing a call after a normal
15 termination according to claim 27, wherein either party can initiate the reestablishment procedure.

30. An apparatus for reestablishing a call after a normal termination according to claim 27, wherein said wirebound terminal generates an acoustical signal when said call can not be reconnected.

20 31. An apparatus for reestablishing a call after a normal termination according to claim 27, wherein the reestablishment procedure is initiated by depressing at least one predetermined key on a keyset on said wirebound terminal.

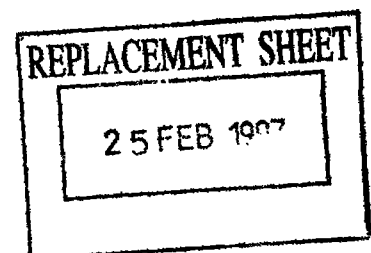

This Sheet Has Been Replaced







ABSTRACT**REESTABLISHMENT OF CALL AFTER DISCONNECT**

A method and apparatus for reestablishing a call after a call has been disconnected or after the quality of the call has become bad is disclosed. A disconnected mobile station scans the signal strength of surrounding base stations and accesses the base station with the highest signal strength. The mobile station then initiates a new call back to a service node. The base station then assigns the mobile station a traffic channel and the service node reconnects the call. In addition, a method for reestablishing a call in any communication network after the call has been terminated in a normal fashion is disclosed.

Figure 4

This Sheet Has Been Replaced

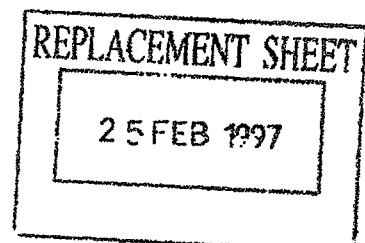

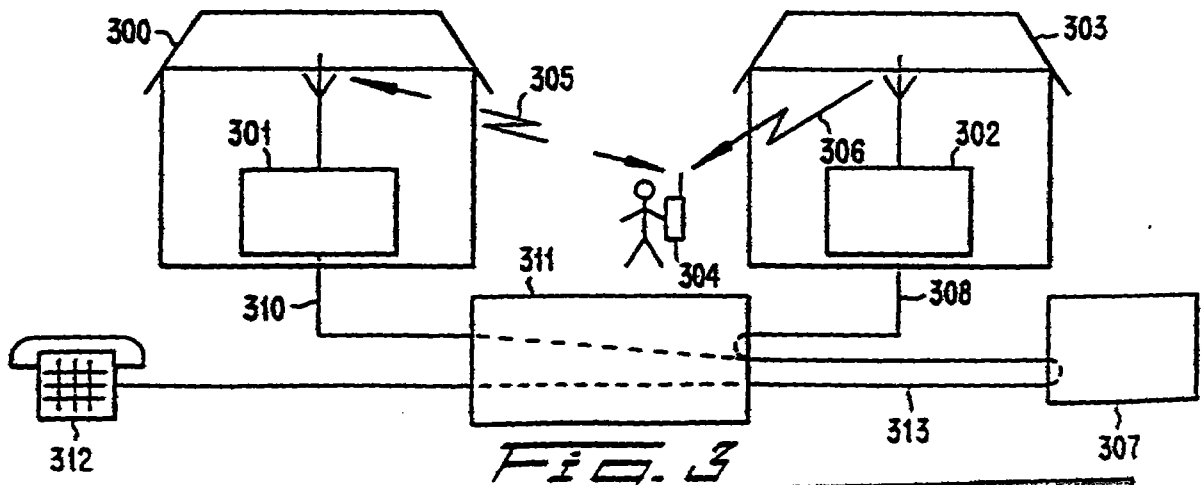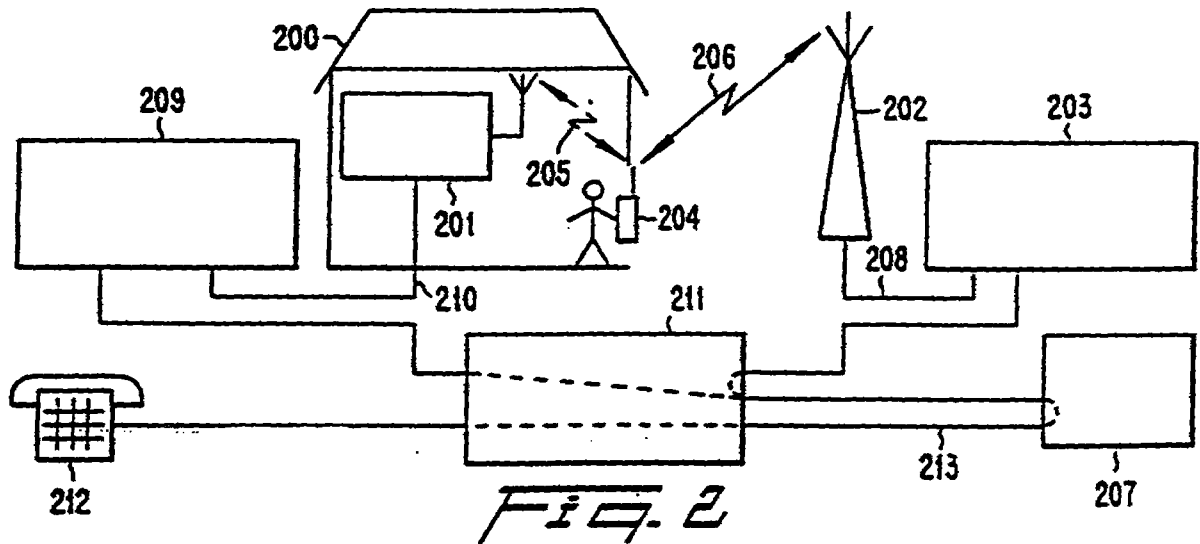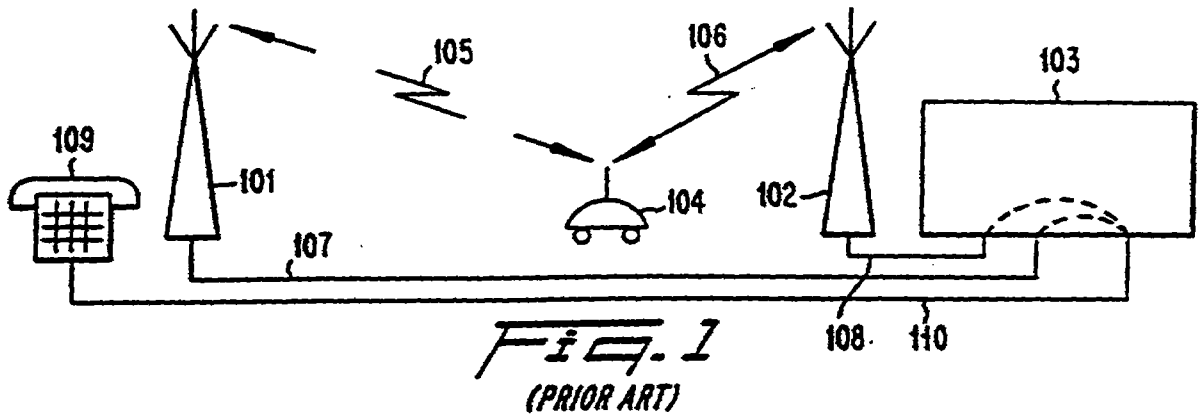

REPLACEMENT SHEET
25 FEB 1997

FIG. 4



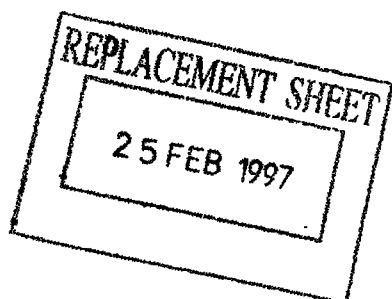


FIG. 5

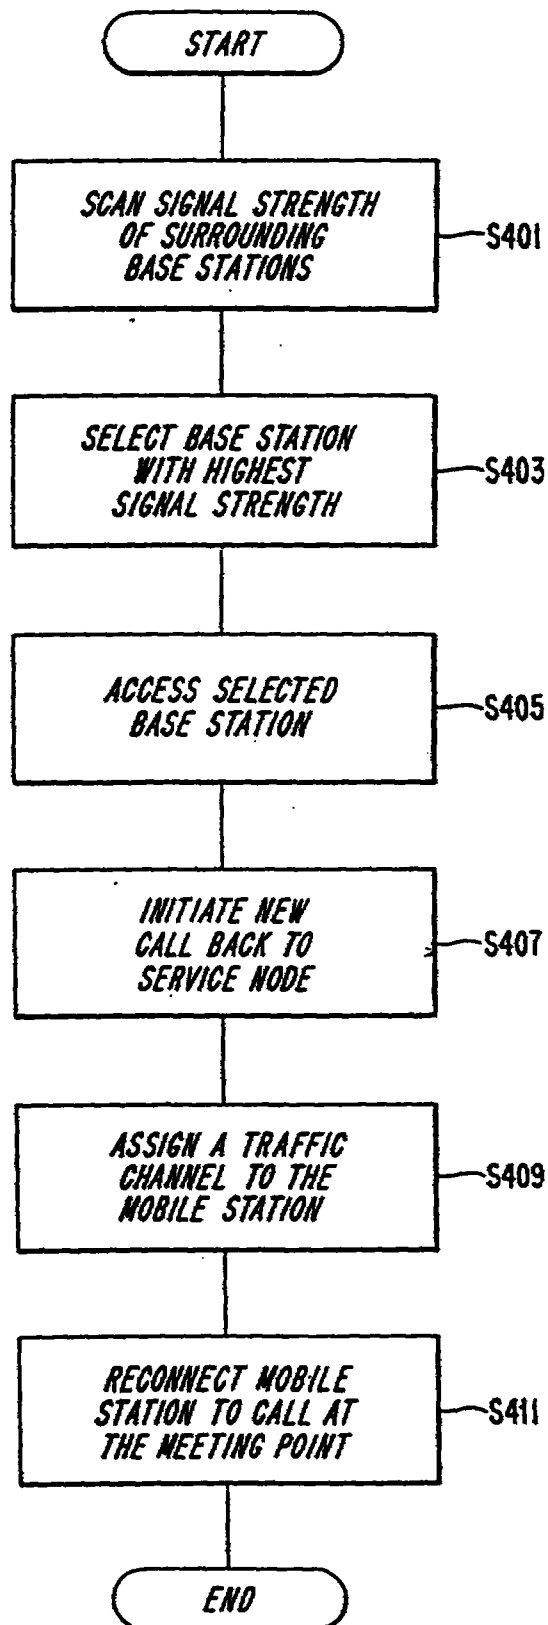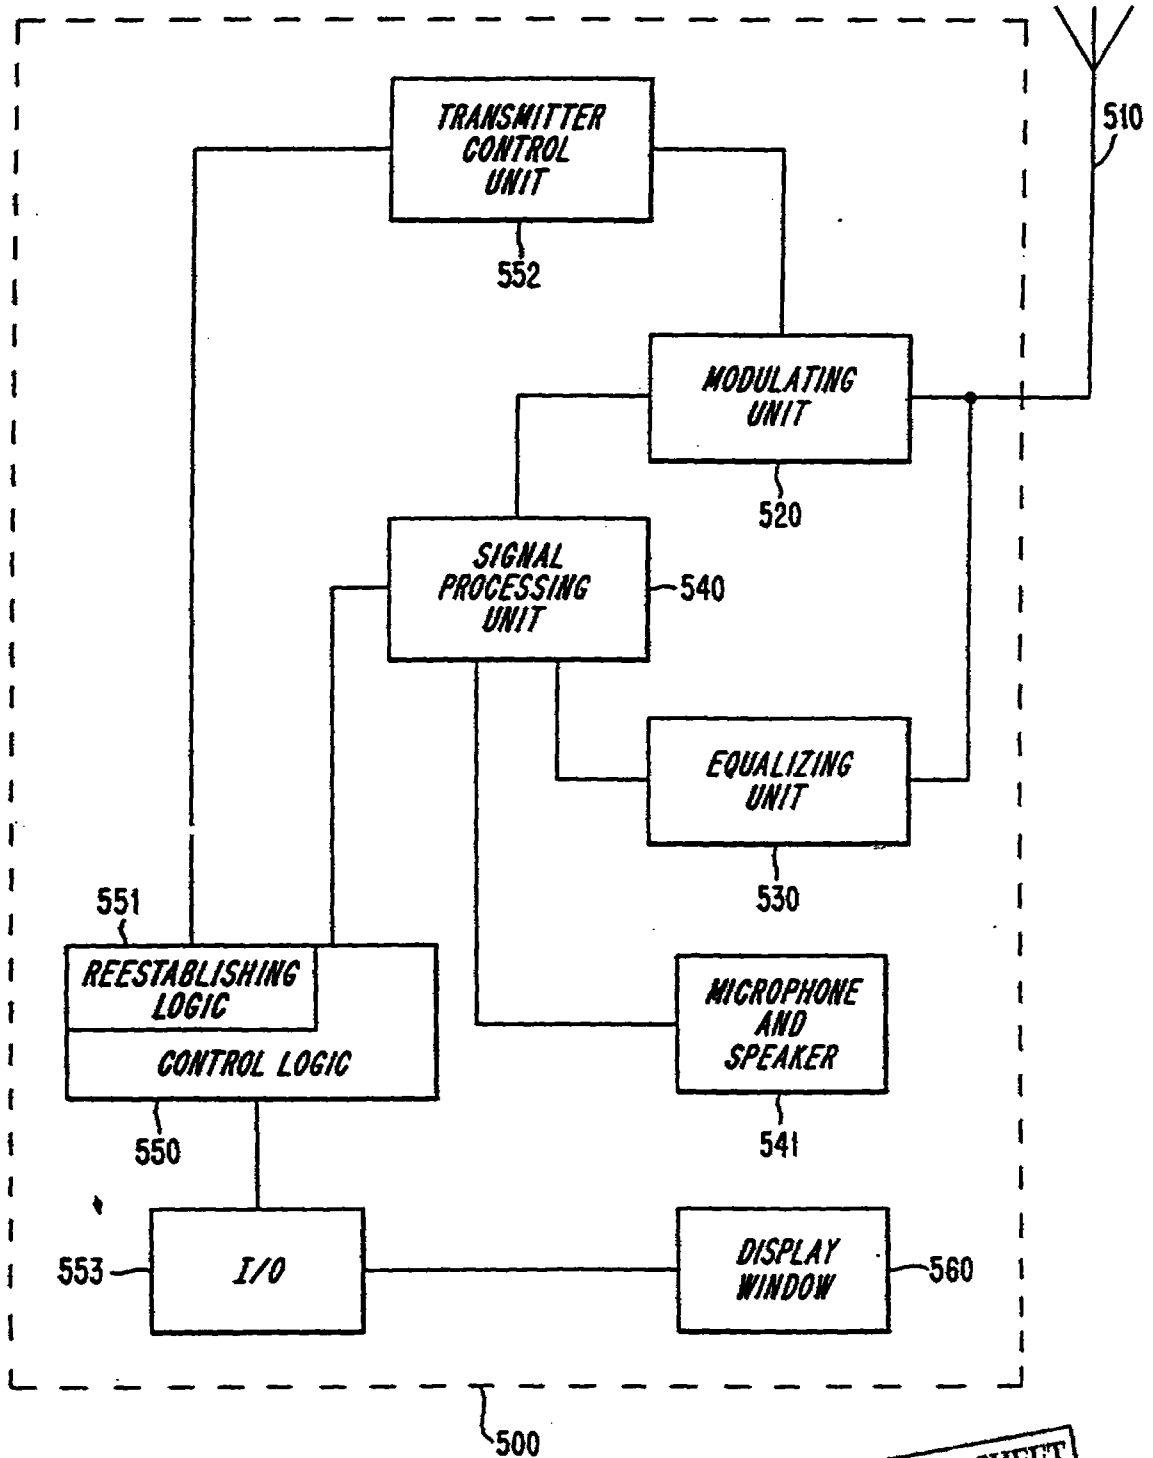

REPLACEMENT SHEET
25 FEB 1997

Fig. 6


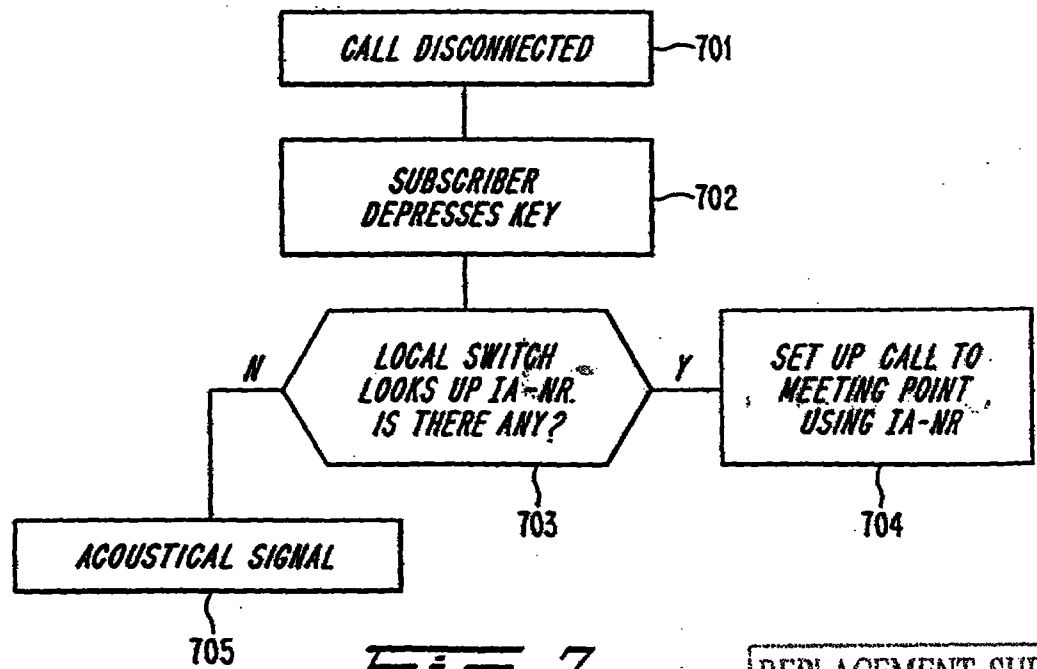


Fig. 7

REPLACEMENT SHEET

25 FEB 1997

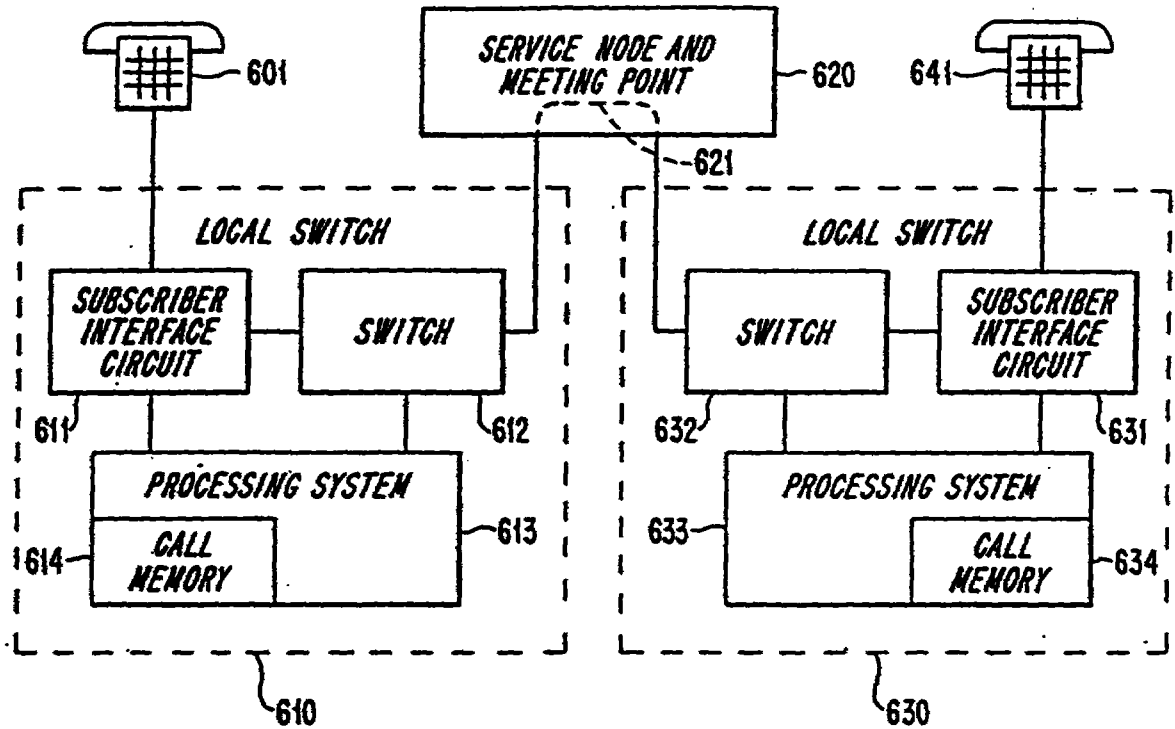

WHAT IS CLAIMED IS:

1. A method for reestablishing a call after the call has been disconnected involving a terminal (204 or 212) in a communication system, wherein a first radio communication path has been established between the terminal and a first radio station (201) before the disconnection of the call and a second radio communication path is established between the terminal and a second radio station (202) after the disconnection of the call, said method characterized by the step of:


establishing a wired communication path from the second radio station to a meeting point selected by a service node (207) common to a plurality of such communication paths, at which meeting point the parties of the call are connected together; and

initiating a new call back across said second radio communication path to said meeting point, wherein said terminal initiates said call back to said meeting point using an interaction number which is different from a called party's number and is entered and stored prior to call disconnection in said terminal or in equipment permanently connected to said terminal wherein further said meeting point, upon receiving said interaction number, reconnects the terminal to the opposite party.

2. A method for reestablishing a call after the call has been disconnected according to claim 1, wherein said interaction number is sent to said terminal during call setup.

3. A method for reestablishing a call after the call has been disconnected according to claim 1, wherein said interaction number is inserted via a key set on said terminal.


4. A method for reestablishing a call after the call has been disconnected according to claim 1, wherein said new call is initiated automatically after the call has been disconnected.

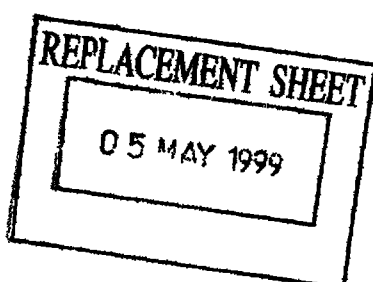

REPLACEMENT SHEETS		SG
☐	Description : paged	to paged
☒	Claim(s) : paged	to paged
☐	Drawing(s) : paged	to paged
☒	Abstract : paged	to paged
DATE OF RECEIPT 5/5/99		



5. A method for reestablishing a call after the call has been disconnected according to claim 1, wherein said new call is initiated after the call has been disconnected and a subscriber depresses at least one key on a keyset on said terminal.
6. A method for reestablishing a call after the call has been disconnected according to claim 1, wherein said terminal is a mobile radio terminal.
7. A method for reestablishing a call after the call has been disconnected according to claim 1, wherein said terminal is a wirebound terminal.
8. A method for reestablishing a call according to claim 1 wherein said call is disconnected when it is determined to have a quality level considered below an acceptable level by a subscriber participating in the call.
9. A method for reestablishing a call according to claim 8, wherein said interaction number is sent to said terminal during call setup.
10. A method for reestablishing a call according to claim 8, wherein said interaction number is inserted via a key set on said terminal.
11. A method for reestablishing a call according to claim 8, wherein said new call is initiated after the quality of the call has fallen below a predetermined level for a predetermined period of time and a subscriber depresses at least one key on a keyset on said terminal.
12. A method for reestablishing a call according to claim 8, wherein said terminal is a mobile radio terminal.
13. A method for reestablishing a call according to claim 8, wherein said terminal is a wirebound terminal.

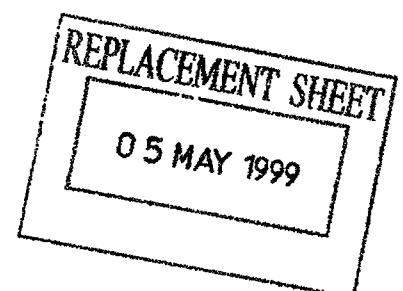



14. An apparatus for reestablishing a call from a terminal (204 or 212) after the call has been disconnected in a communication system, wherein a first radio communication path has been established between the terminal and a first radio station (201) before the disconnection of the call and a second radio communication path is established between the terminal and the second radio station (202) after the disconnection of the call, characterized by providing:

a means for establishing a wired communication path from the second radio station to a meeting point selected by a service node (207) common to a plurality of such communication paths, at which meeting point the parties of the call are connected together;

a means for initiating a new call back across said second radiocommunication path to said meeting point, wherein the terminal initiates the call back to said service node using an interaction number which is different from a called party's number and is entered and stored prior to call disconnection in said terminal or in equipment permanently connected to said terminal; and


a means for reconnecting the terminal to the opposite party upon receiving the interaction number.

15. A method for reestablishing a call after a normal termination (701) involving a terminal (204 or 212) in a communication system, said method characterized by the steps of:

establishing a wired communication path from the second radio station to a meeting point selected by a service node (207) common to a plurality of such communication paths, at which meeting point the parties of the call are connected together;

depressing (702) a predetermined key or sequence of keys on a keyset on said terminal after the call has been terminated; and

determining (703) whether the terminal has an active call record with an interaction number, said interaction number being different from a called party's number wherein said meeting point, upon receiving said interaction number reconnects (704) said terminal to the opposite party.

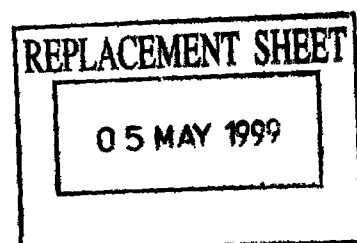



16. A method for reestablishing a call after a normal termination according to claim 15, wherein said call record remains active after the termination for a predetermined period of time.

17. A method for reestablishing a call after a normal termination according to claim 15, wherein either party can initiate the reestablishment method.

18. A method for reestablishing a call after a normal termination according to claim 15, wherein said terminal generates an acoustic signal when the call can not be reestablished.


19. A method for reestablishing a call after a normal termination according to claim 15, wherein said terminal is a wirebound terminal.

20. An apparatus for reestablishing a call after a normal termination (701) involving a terminal (204 or 212) in a communication system, characterized by providing:

a means for establishing a wired communication path from the second radio station to a meeting point selected by a service node (207) common to a plurality of communication paths, at which meeting point the parties of the call are connected together;

a means (702) on said terminal for initiating the reestablishment procedure after the call has been terminated;

a means (703) for determining whether the terminal has an active call record with an interaction number, said interaction number being different from a called party's number; and a means (704) for reconnecting said terminal to the opposite party upon receiving the interaction number.

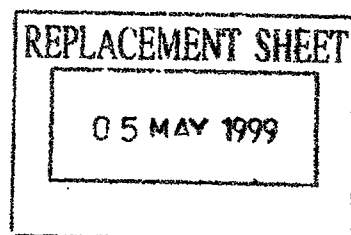

ABSTRACT

REESTABLISHMENT OF CALL AFTER DISCONNECT

A method and apparatus for reestablishing a call after a call has been disconnected or after the quality of the call has become bad is disclosed. A disconnected mobile station scans the signal strength of surrounding base stations and accesses the base station with the highest signal strength. The mobile station then initiates a new call back to a service node. The base station then assigns the mobile station a traffic channel and the service node reconnects the call. In addition, a method for reestablishing a call in any communication network after the call has been terminated in a normal fashion is disclosed.

Figure 4

