

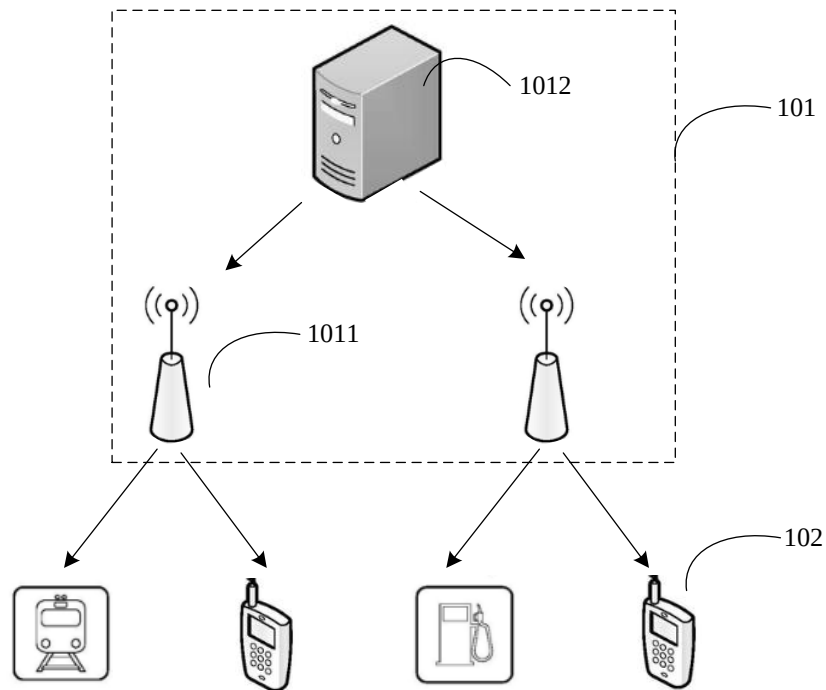


FIG. 1

sending positioning capability information to a network device, wherein the positioning capability information is configured to indicate capability information about transmitting multi-carrier-frequency positioning signals

S21

FIG. 2

receiving positioning capability information sent by a terminal device, wherein the positioning capability information is configured to indicate capability information about transmitting multi-carrier-frequency positioning signals

S31

FIG. 3




FIG. 4

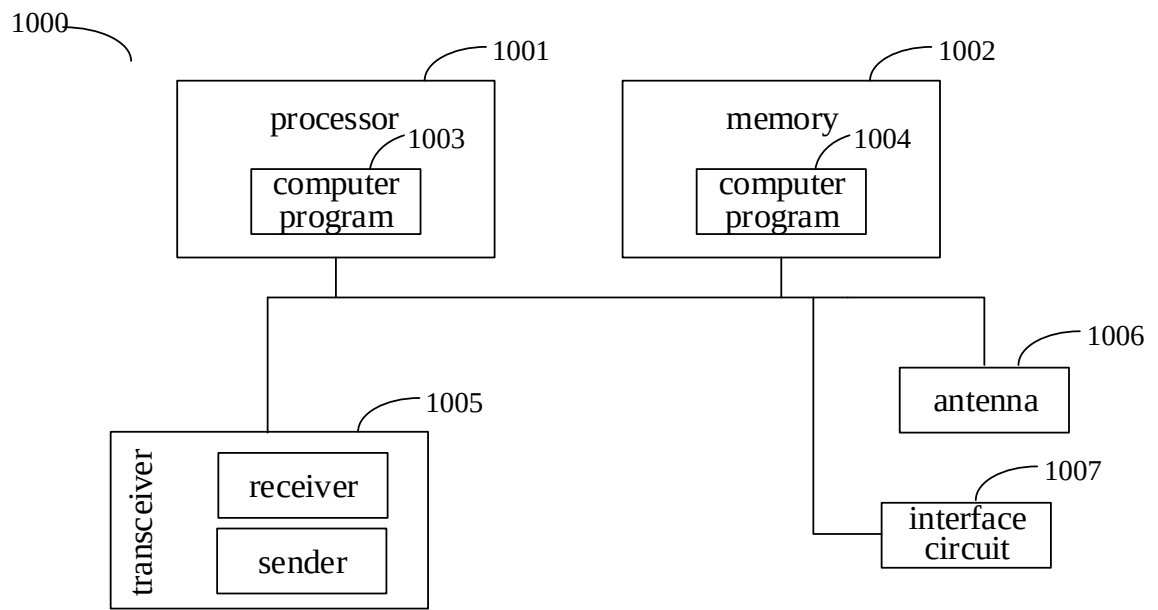


FIG. 5

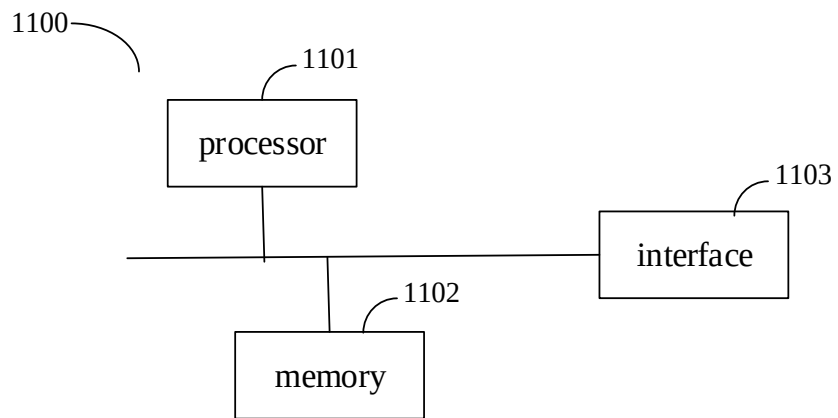


FIG. 6