



(51) International Patent Classification:

B32B 21/08 (2006.01) **E04F 15/10** (2006.01)
B27N 7/00 (2006.01) **B27N 3/04** (2006.01)
C09D 101/00 (2006.01)

(21) International Application Number:

PCT/SE2010/051472

(22) International Filing Date:

22 December 2010 (22.12.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1050037-9 15 January 2010 (15.01.2010) SE

(71) Applicant (for all designated States except US): **CER-ALOC INNOVATION BELGIUM BVBA** [BE/BE]; IT Tower, Avenue Louise 480, B-1050 Brussels (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZIEGLER, Göran** [SE/SE]; Hästhovsvägen 11, S-260 40 Viken (SE). **LINDGREN, Kent** [SE/SE]; Alvägen 41, S-284 32 Perstorp (SE).

(74) Agent: **ENGSTRAND, Ola**; Prästavägen 513, S-263 65 Viken (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: BRIGHT COLORED SURFACE LAYER

Fig. 1

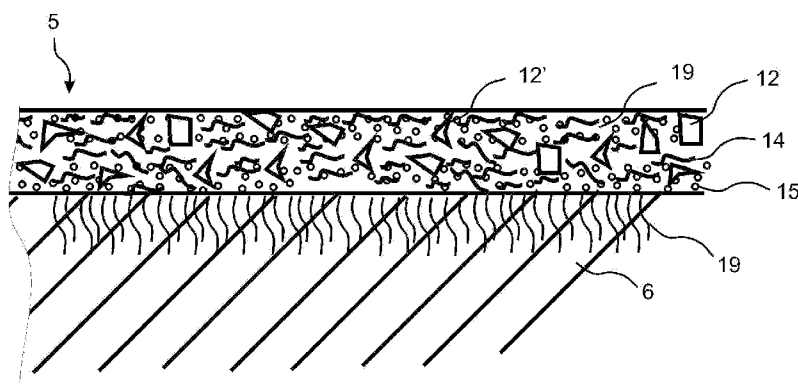

(57) Abstract: A method to produce a pale and / or a plain coloured wear resistant surface layer by using a dry powder layer comprising a mix of refined fibres binder, pigment and wear resistant particles.