

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 June 2003 (12.06.2003)

PCT

(10) International Publication Number
WO 03/048501 A2

(51) International Patent Classification⁷: **E21B**
(21) International Application Number: PCT/US02/37914
(22) International Filing Date:
26 November 2002 (26.11.2002)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
09/998,125 30 November 2001 (30.11.2001) US
(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Blvd., Houston, TX 77072 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— *without international search report and to be republished upon receipt of that report*

(72) Inventors: **ESTEP, James, W.**; 14202 Lake Scene Trail, Houston, TX 77059 (US). **CHANG, Chi-Huang, Michael**; 2919 Cane Field, Sugar Land, TX 77479 (US).
(74) Agents: **CONLEY ROSE, P.C.** et al.; P.O. Box 3267, Houston, TX 77253-3267 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DOWNHOLE ASSEMBLY RELEASABLE CONNECTION

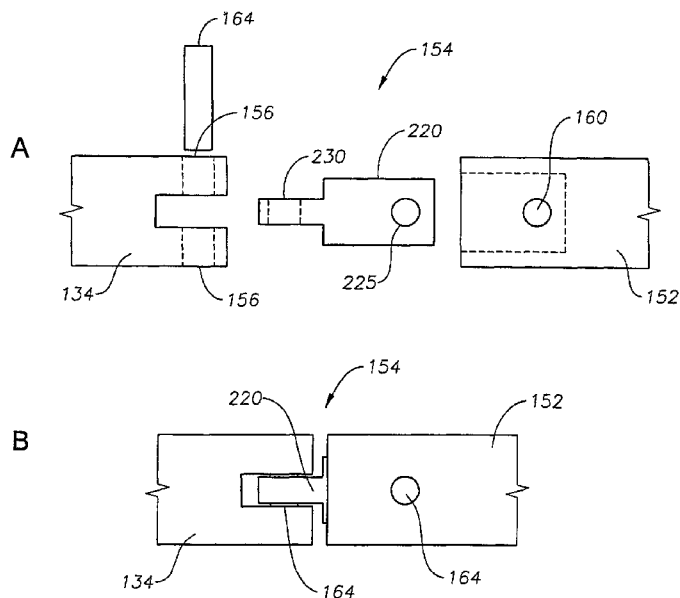

(57) Abstract: A disconnect assembly connecting two portions of a downhole assembly having a downhole apparatus attached to a coiled tubing string. The disconnect assembly includes a first housing connected to one portion of the downhole assembly and a second housing connected to another portion of the downhole assembly. The housings are releasably connected by a release assembly. The release assembly is coupled to a drive train on a motor by a connection transferring rotational motion into translational motion. The release assembly includes locking members having a connected position engaging both housings and a released position wherein the housings can be separated. The motor is connected to the surface by conductors extending through the coiled tubing whereby the motor may be actuated from the surface to move the release assembly between the connected and disconnected positions.



WO 03/048501 A2