

2003054350

21 AUG 2003

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
26 September 2002 (26.09.2002)

PCT

(10) International Publication Number
WO 02/075986 A1(51) International Patent Classification⁷: **H04B 17/00**,
H04Q 7/34[CA/FI]; Kallioportinkatu 5 D 21, FIN-33720 Tampere
(FI).

(21) International Application Number: PCT/FI02/00216

(74) Agent: **KOLSTER OY AB**; Iso Roobertinkatu 23, P.O.
Box 148, FIN-00121 Helsinki (FI).

(22) International Filing Date: 15 March 2002 (15.03.2002)

(25) Filing Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE
(utility model), DK, DK (utility model), DM, DZ, EC, EE,
EE (utility model), ES, FI, FI (utility model), GB, GD, GF,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU,
SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:
20010533 16 March 2001 (16.03.2001) FI(71) Applicant (*for all designated States except US*): **NOKIA
CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150
Espoo (FI).


(72) Inventor; and

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),(75) Inventor/Applicant (*for US only*): **LEMIEUX, Berthier**

[Continued on next page]

(54) Title: TESTING LOOPS FOR CHANNEL CODECS

(57) Abstract: A method for measuring the performance of decoding in a telecommunication system comprising a decoder and a testing apparatus for supplying test data to the decoder. A test data comprising channel coded speech parameters and an inband data field in a frame format is generated in the testing apparatus and transmitted to the decoder for decoding. The decoder extracts at least a part of the inband data field from the decoded test data and transmits at least the part of the inband data field back to the testing apparatus. The performance of decoding is measured by comparing the transmitted inband data field and the received inband data field in the test apparatus.

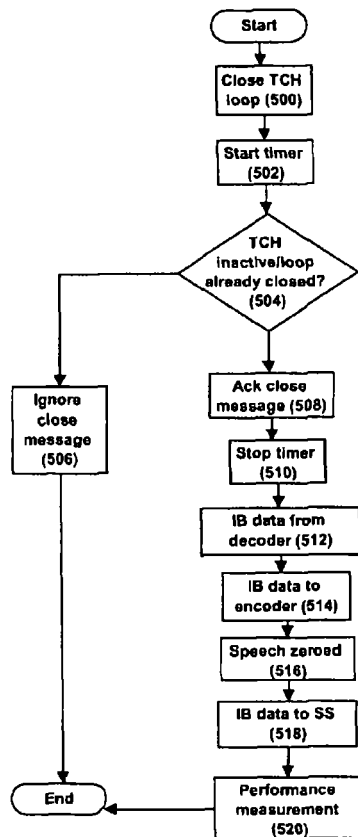

162162



ACTION

WO 02/075986 A1