

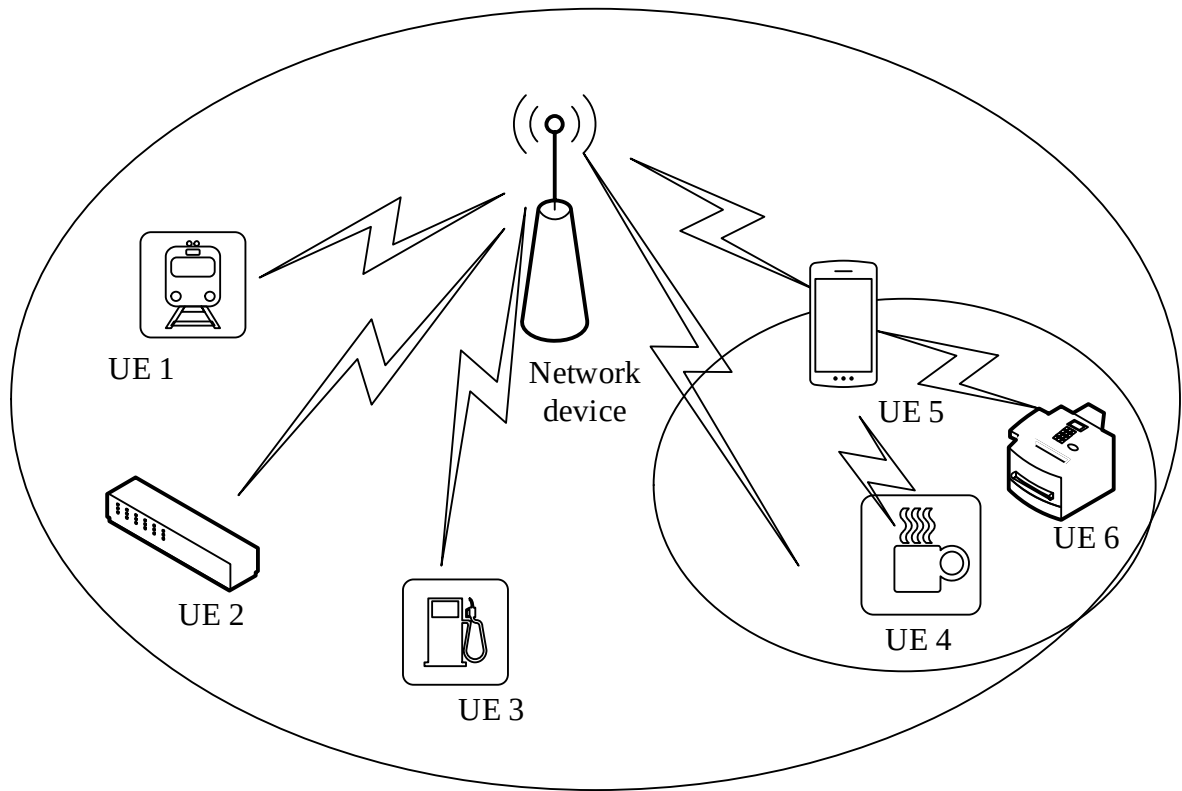


FIG. 1

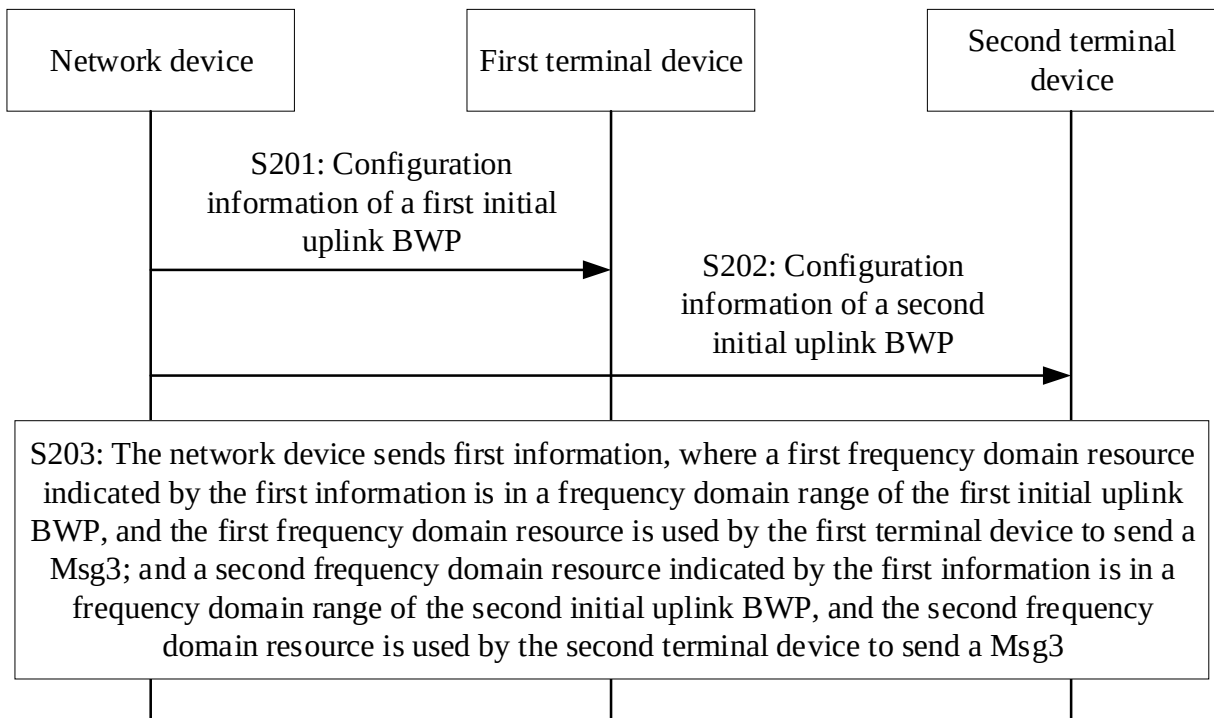


FIG. 2

For RIVs in a same RAR, frequency domain resource locations determined by a first terminal device and a second terminal device are the same

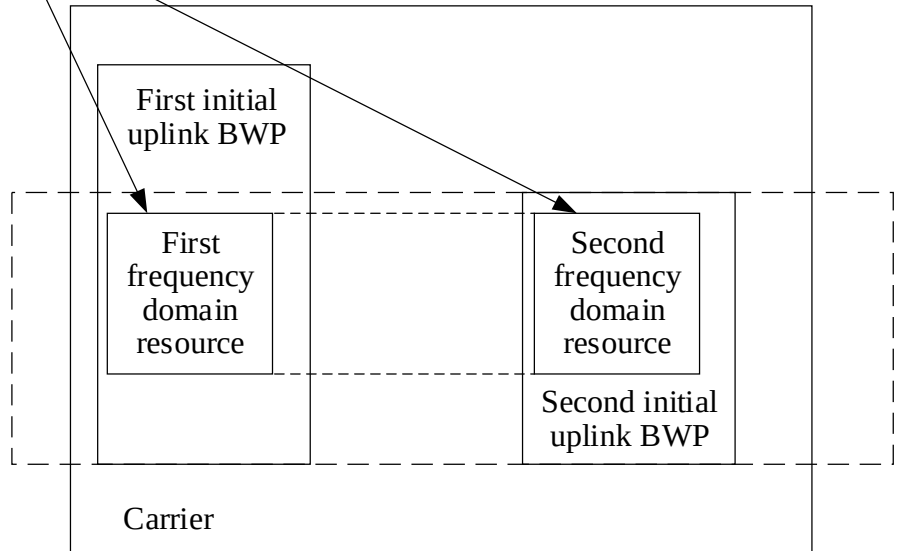


FIG. 3

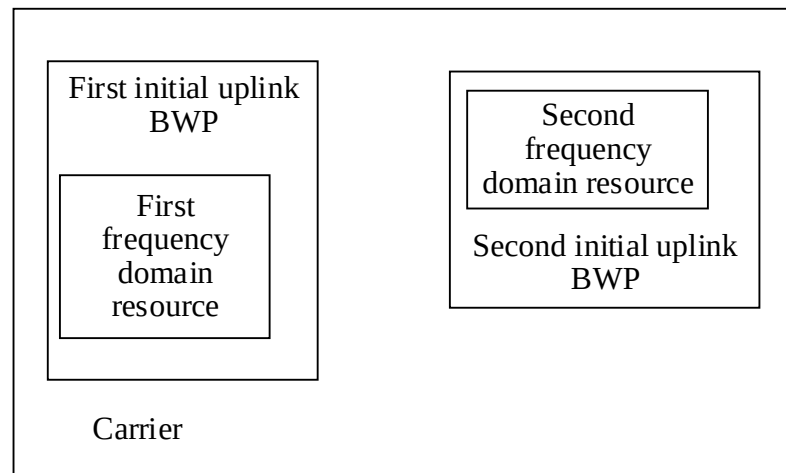


FIG. 4

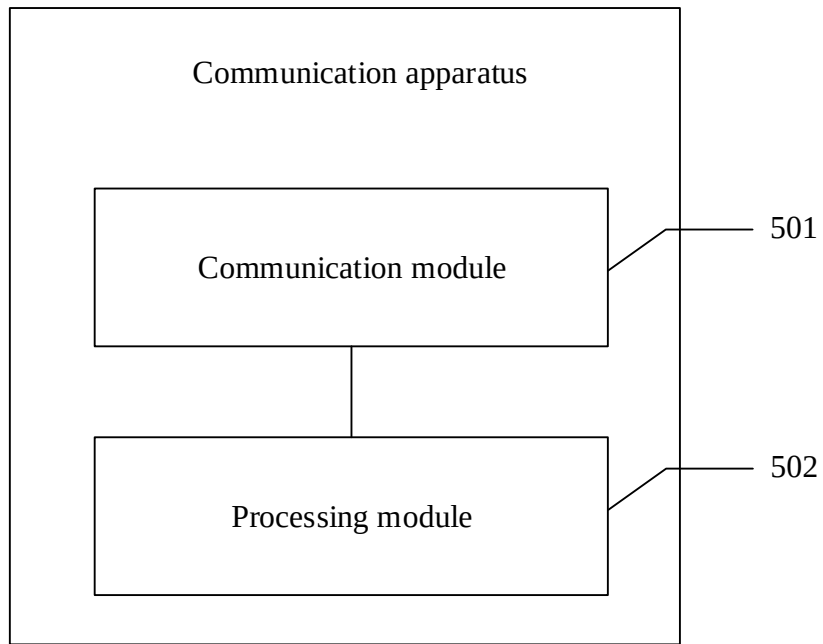


FIG. 5

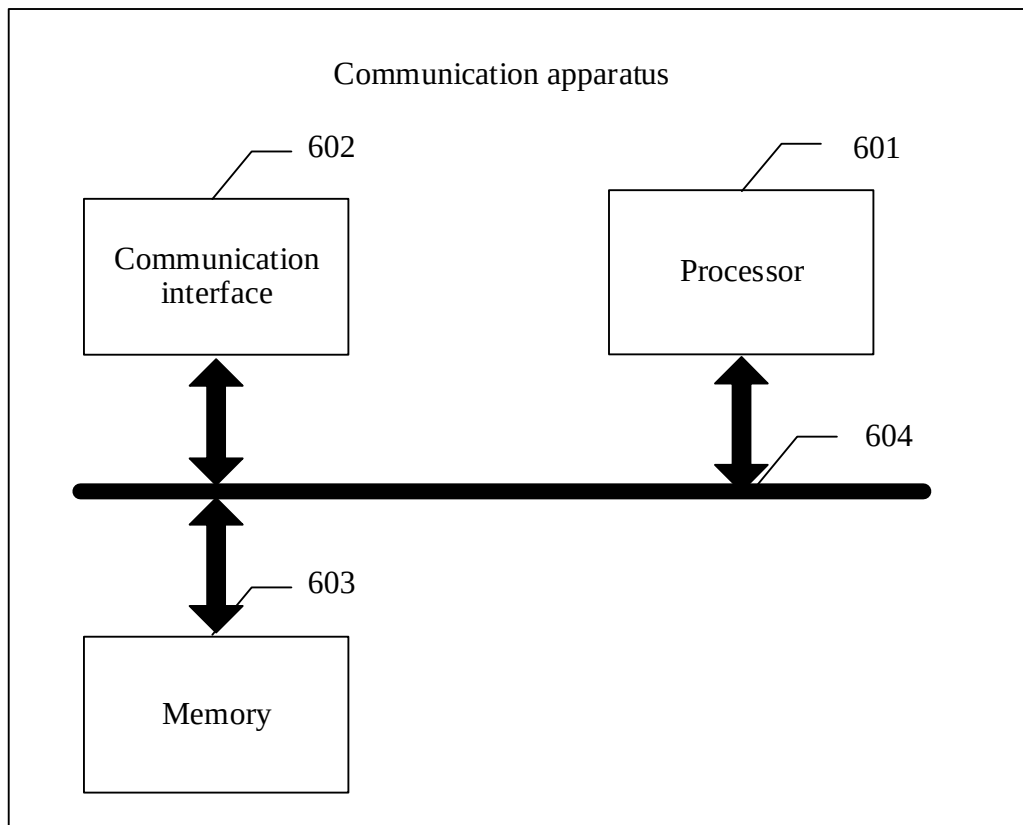


FIG. 6

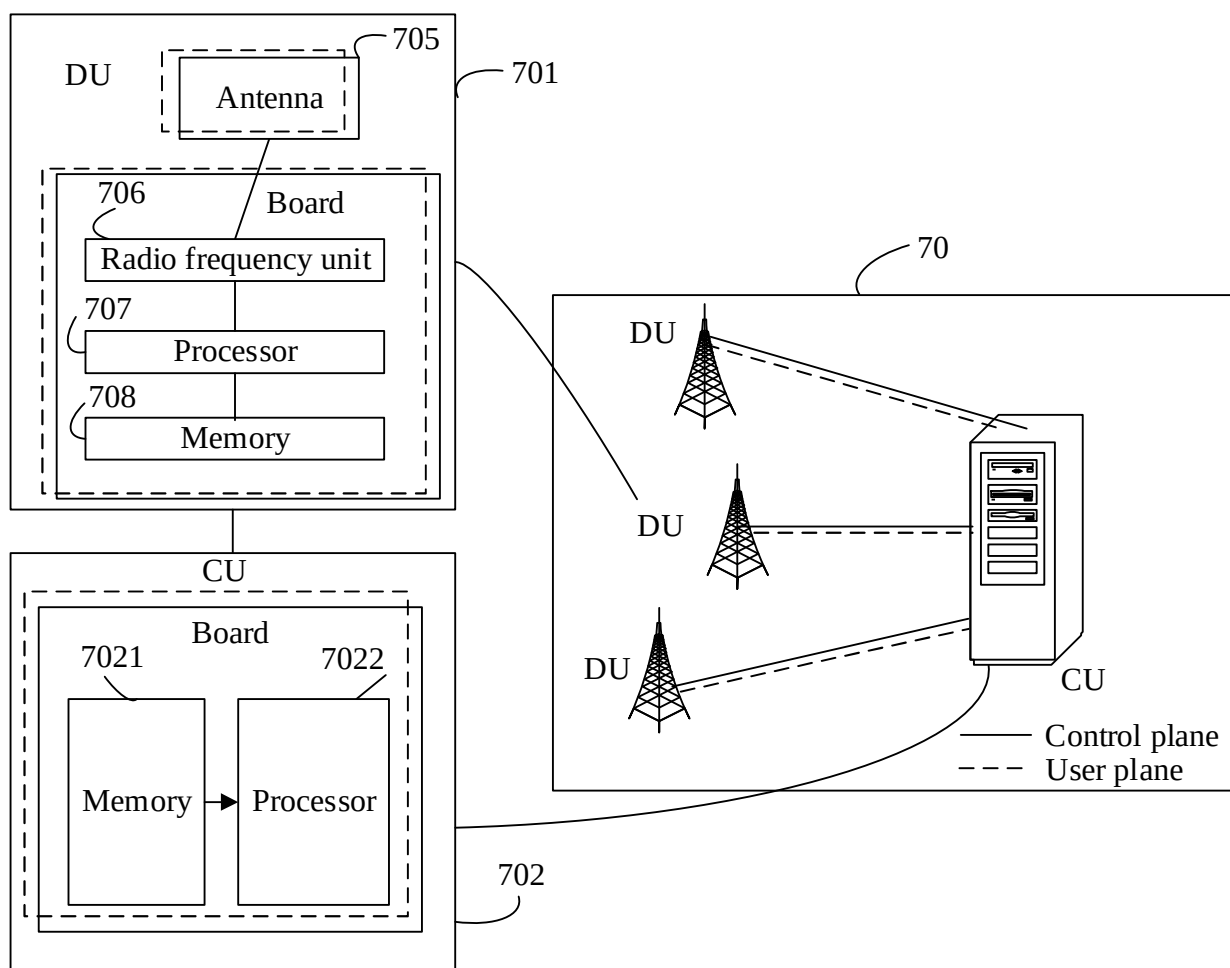


FIG. 7

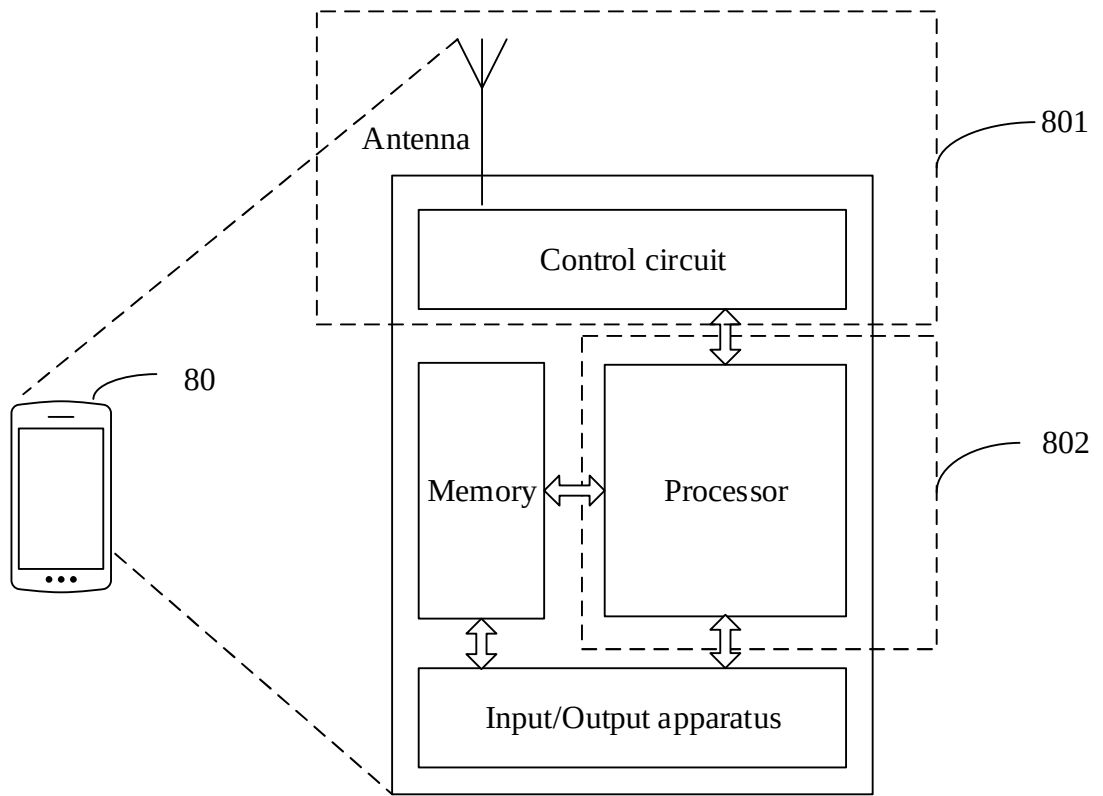


FIG. 8