



(51) International Patent Classification:
B66D 1/74 (2006.01)

(21) International Application Number:
PCT/IT2014/000081

(22) International Filing Date:
26 March 2014 (26.03.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
TO2013A000322 22 April 2013 (22.04.2013) IT

(71) Applicant: **KITE GEN RESEARCH S.R.L.** [IT/IT];
Corso Lombardia 63/D, Area Produttiva Pescarito, I-10099
San Mauro Torinese (TO) (IT).

(72) Inventor: **IPPOLITO, Massimo**; Kite Gen Research
S.R.L., Corso Lombardia 63/D, Area Produttiva Pescarito,
I-10099 San Mauro Torinese (TO) (IT).


(74) Agent: **GARAVELLI, Paolo**; A.BRE.MAR. S.R.L, Via
Servais 27, I-10146 Torino (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: IMPROVED PULLEY FOR HIGH-EFFICIENCY WINCH

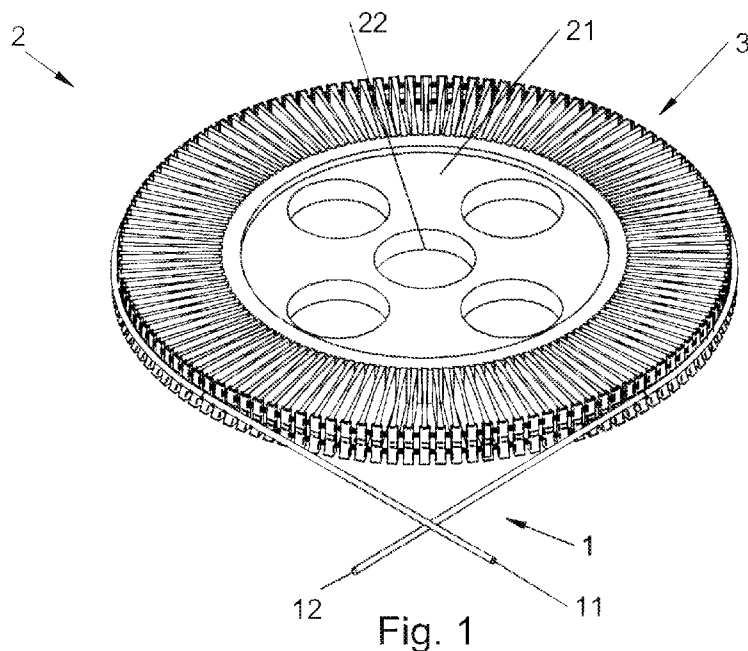

(57) Abstract: An improved pulley (2) for a winch is described, in contact with at least one section of rope (1) included between an inlet section connected to a working load and an outlet section (12) connected to a resisting load, comprising a plurality of peripheral supports (3, 4, 5, 6) deformable depending on a length variation of such section of rope.

WO 2014/174541 A1



Published:

— *with international search report (Art. 21(3))*