

(10) International Publication Number
WO 2013/160842 A1(43) International Publication Date
31 October 2013 (31.10.2013)

(51) International Patent Classification:

A44C 7/00 (2006.01) A44C 5/00 (2006.01)
A44C 9/00 (2006.01)

(21) International Application Number:

PCT/IB2013/053232

(22) International Filing Date:

24 April 2013 (24.04.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/454,231 24 April 2012 (24.04.2012) US
13/555,154 22 July 2012 (22.07.2012) US(71) Applicant: GRAND RAINBOW INTERNATIONAL
LIMITED [CN/CN]; 36/F., Tower Two, Times Square, 1
Matheson Street, Causeway Bay (CN).(72) Inventor: HUYNH, Khanh Tan; 18 Jordan Street, Ash-
wood, VIC 3147 (AU).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

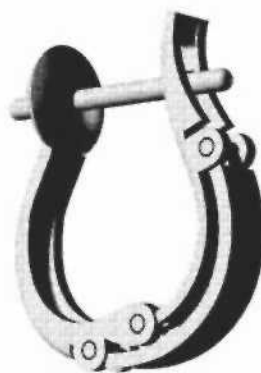
— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))(54) Title: JEWELRY ITEM, METHOD OF MANUFACTURING A CLOSURE FOR JEWELRY ITEM, FINDING FOR AN
EARRING, KIT OF RTS FORMING THE FINDING, AND EARRING CONSTRUCTED FROM THE KIT

FIG. 28A

(57) Abstract: A jewelry item has a ring part (52) pivotally attached to a closure (56) at one end. The closure (56) spans the continu-
ity of the ring from an end of the ring part (52) and comprises a ring continuation arm (58) extending in continuity of the ring and
pivotally attached to an end of the ring part (52) at a pivoted connection (60). The closure (56) further comprises a bias arm (63) ex-
tending along with the ring continuation arm (58) along said ring continuity. The bias arm (63) comprises a spring part and a lever
part (66) pivotally attached to each other. A connection (68) between said lever part (66) and the ring part (52) is rigid, so that as the
ring part (52) is opened, said lever part (66) is configured to rotate inwardly towards an interior of said item. The spring part has a
natural shape of smaller circumference than the ring part (52) so that once a certain extent is reached, the spring part pulls the lever
part (66) towards the spring part in order to allow the spring part to attain its smaller diameter and thus establish a stable open posi-
tion. The lever part (66) further on closure of the ring part (52), is configured to push the spring part outwardly towards the ring con-
tinuation arm to establish a second stable position to close the closure. Another jewelry item (70) comprising a spring arm (80)
pivoted to said continuation at a first location (86) thereon and further pivoted to its ring part (72) at a second location (86) is dis-
closed. A method of manufacturing a closure for a jewelry item (72), a finding (214) for an earring, a kit of parts (270,272) construc-
ted to form the finding (214) and an earring constructed from the kit of parts and a mounting are also disclosed.