



(51) International Patent Classification:

F24F 1/01 (2011.01) F04D 25/08 (2006.01)
F24F 6/14 (2006.01) F04D 29/70 (2006.01)
F24F 13/26 (2006.01)

(21) International Application Number:

PCT/GB2012/051488

(22) International Filing Date:

26 June 2012 (26.06.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1112911.1 27 July 2011 (27.07.2011) GB

(71) Applicant (for all designated States except US): **DYSON TECHNOLOGY LIMITED** [GB/GB]; Tetbury Hill, Malmesbury Wiltshire SN16 0RP (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STANIFORTH, Mark** [GB/GB]; c/o Dyson Technology Limited, Tetbury

Hill, Malmesbury Wiltshire SN16 0RP (GB). **PULLEN, Jude** [GB/GB]; c/o Dyson Technology Limited, Tetbury Hill, Malmesbury Wiltshire SN16 0RP (GB).

(74) Agents: **BOOTH, Andrew** et al.; Dyson Technology Limited, Intellectual Property Department, Tetbury Hill, Malmesbury Wiltshire SN16 0RP (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,

[Continued on next page]

(54) Title: A FAN ASSEMBLY

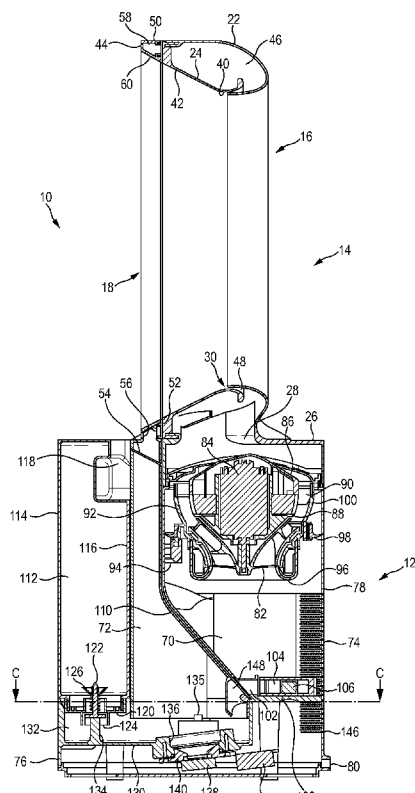


FIG. 4

(57) Abstract: A fan assembly includes a nozzle and a body on which the nozzle is mounted. The nozzle has a rear section having at least one first air inlet, at least one first air outlet, and a first interior passage for conveying air from said at least one first air inlet to said at least one first air outlet; and a front section having at least one second air inlet, at least one second air outlet, and a second interior passage which is isolated from the first interior passage for conveying air from said at least one second air inlet to said at least one second air outlet. The sections of the nozzle defining a bore through which air from outside the fan assembly is drawn by air emitted from the nozzle. The body includes flow generating means for generating a first air flow through the first interior passage and a second air flow through the second interior passage, and means for changing one of the temperature, humidity, and electrical charge of the second air flow before it enters the second interior passage.



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*