



(51) International Patent Classification:

E05B 17/00 (2006.01) E05B 67/24 (2006.01)
E05B 17/14 (2006.01)

(21) International Application Number:

PCT/FI2012/051034

(22) International Filing Date:

26 October 2012 (26.10.2012)

(25) Filing Language:

Finnish

(26) Publication Language:

English

(30) Priority Data:

20116058 28 October 2011 (28.10.2011)

FI

(71) Applicant: **ABLOY OY** [FI/FI]; Wahlforssinkatu 20, FI-80100 Joensuu (FI).

(72) Inventors: **KYLLÖNEN, Veli-Pekka**; Hirviseläntie 6, FI-80780 Kontioniemi (FI). **SALLINEN, Tomi**; Varppitie 2 A 4, FI-80160 Joensuu (FI).

(74) Agent: **BERGGREN OY AB**; P.O. Box 16, (Antinkatu 3 C), FI-00101 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PADLOCK

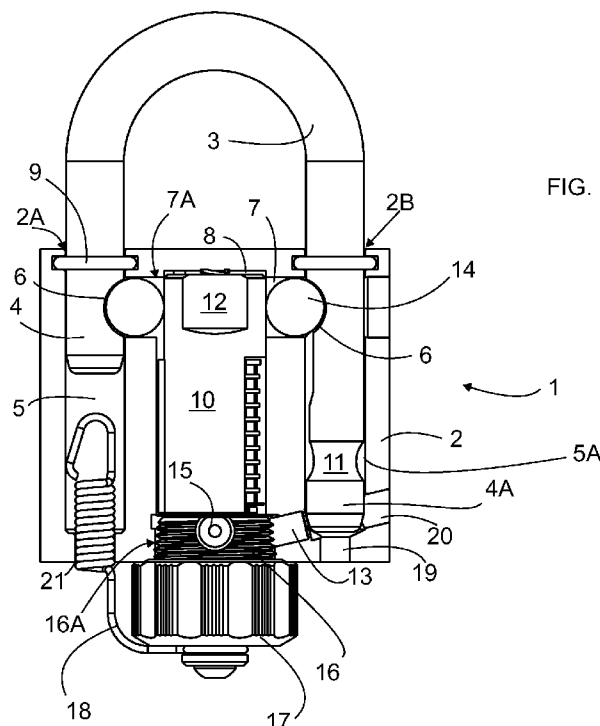


FIG. 1

(57) Abstract: The object of the invention is to provide a padlock (1), which is capable of remaining functional in even very dusty, watery or otherwise difficult conditions. In addition, there would be reason for forming the protection level of the padlock (1) to be selectable and updatable as needed to even a better. The invention comprises a protective cap (17) provided with a gasket (30) and possibly gasketed latch elements (22).