

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 January 2003 (16.01.2003)

PCT

(10) International Publication Number
WO 03/004782 A3

(51) International Patent Classification⁷: **E02F 9/28**

(21) International Application Number: PCT/US02/19794

(22) International Filing Date: 3 July 2002 (03.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/899,535 6 July 2001 (06.07.2001) US
60/369,846 5 April 2002 (05.04.2002) US

(71) Applicant: **ESCO CORPORATION** [US/US]; 2141 N.W. 25th Avenue, Portland, OR 97210 (US).

(72) Inventors: **JONES, Darren, F.**; P.O. Box 10024, Portland, OR 97296 (US). **CARPENTER, Christopher, M.**; 19047 SW Chesapeake Drive, Tualatin, OR 97062 (US). **GRAF, David, M.**; 33397 Wikstrom Road, Scappoose, OR 97056 (US).


(74) Agent: **SCHAD, Steven, P.**; Banner & Witcoff, Ltd., 11th Floor, 1001 G Street N.W., Washington, DC 20001-4591 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: COUPLING FOR EXCAVATING WEAR PART

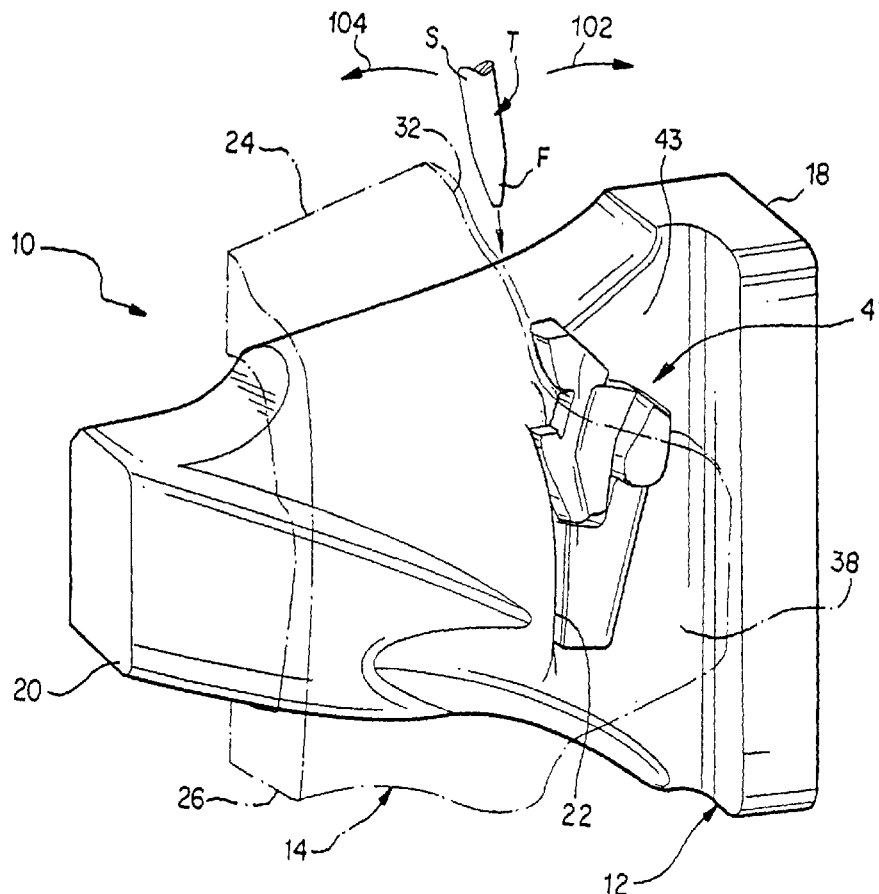

(57) Abstract: A wear assembly provided with tapered opening (30) and a complementary tapered lock (16) wherein the lock (16) can be pried into and from the opening (30) to thereby eliminate the need for hammering. The lock (16) is formed with a body (70) and a latch (72) that is movable between a hold position where the latch (72) is engageable with a stop (48) in the opening (95) to releasably retain the lock (16) in the opening (95) and a release position where the latch (72) disengages the stop (48).

WO 03/004782 A3



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

6 November 2003