



(51) International Patent Classification:

B60J 9/00 (2006.01) **E06B 7/16** (2006.01)
B61D 19/00 (2006.01) **B60P 1/43** (2006.01)
B62D 63/04 (2006.01) **B64D 25/08** (2006.01)

(21) International Application Number:

PCT/CA2008/002220

(22) International Filing Date:

18 December 2008 (18.12.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **CURTIS CANADA, INC.** [CA/CA]; 1225 Industrielle Street, La Prairie, Québec J5R 2E4 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHARBONNEAU, Mathieu** [CA/CA]; 5365 Drolet, # 101, Montreal, Québec H2T 2H5 (CA). **LECLERC, Olivier** [CA/CA]; 2420 Place Neptune, # 3, Brossard, Québec J4Y 1R4 (CA). **LANDRY, Jean-Bernard** [CA/CA]; 7881 Madeleine Huguenin, # 1, Montreal, Québec H1L 6M6 (CA).


(74) Agent: **OGILVY RENAULT LLP/S.E.N.C.R.L., S.R.L.**; Bureau 2500, 1, Place Ville Marie, Montréal, Québec H3B 1R1 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: RAMP FOR EVACUATION DEVICE

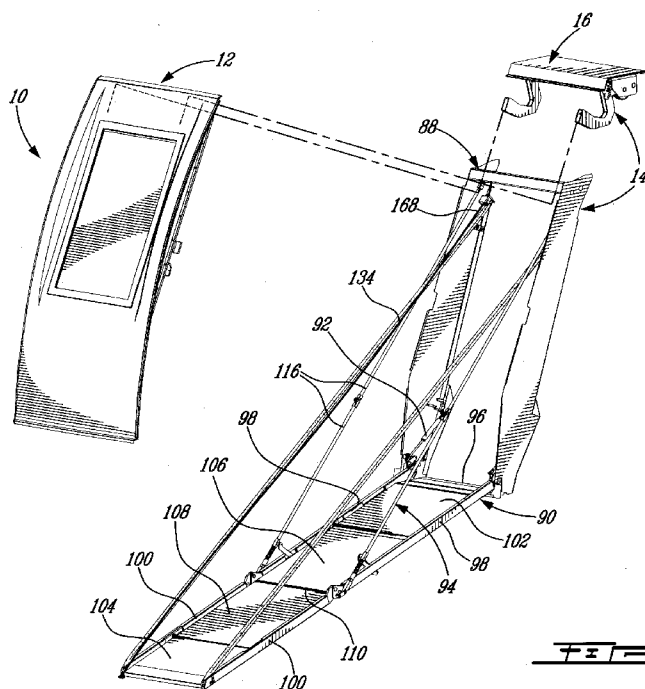

(57) Abstract: A foldable ramp for evacuation of a vehicle, the ramp including hingedly connected primary and secondary side members, a primary fixed panel fixedly attached the primary side members, a primary flipping panel extending between the primary side members adjacent the primary fixed panel and having a first end pivotally connected to the primary side members and a second end free from the side members, and a secondary flipping panel extending between the secondary side members and having a first end free from the side members and hingedly connected to the second end of the primary flipping panel and a second end pivotally connected to the secondary side members. The ramp is configurable between a folded and a deployed position, with the panels in the deployed position forming a ramp surface and the panels in the folded position being stacked one against the other.

FIG. 1



Published:

— *with international search report (Art. 21(3))*