

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 January 2003 (16.01.2003)

PCT

(10) International Publication Number
WO 03/004783 A3

(51) International Patent Classification⁷: **E02F 9/28**

97006 (US). **JONES, Darren, F.**; P.O. Box 10024, Portland, OR 97296 (US).

(21) International Application Number: PCT/US02/19795

(22) International Filing Date: 3 July 2002 (03.07.2002)

(74) Agent: **SCHAD, Steven, P.**; Banner & Witcoff, Ltd., Eleventh Floor, 1001 G. Street N.W., Washington, DC 20001-4597 (US).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/899,535 6 July 2001 (06.07.2001) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.


(71) Applicant: **ESCO CORPORATION** [US/US]; 2141 N.W. 25th Avenue, Portland, OR 97210 (US).

(72) Inventors: **CARPENTER, Christopher, M.**; 19047 S.W. Chesapeake Drive, Tualatin, OR 97062 (US). **FLECK, Robert, S.**; 11589 Kingfisher Lane, Aurora, OR 97002 (US). **BRISCOE, Terry, L.**; 11399 N.W. Ridge Lane, Portland, OR 97229 (US). **DANKS, Daniel, R.**; 9449 N.W. Kaiser Road, Portland, OR 97231 (US). **GAURAV, Venkat, R.**; 20539 S.W. Kirkwood Street, Aloha, OR

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: WEAR ASSEMBLY

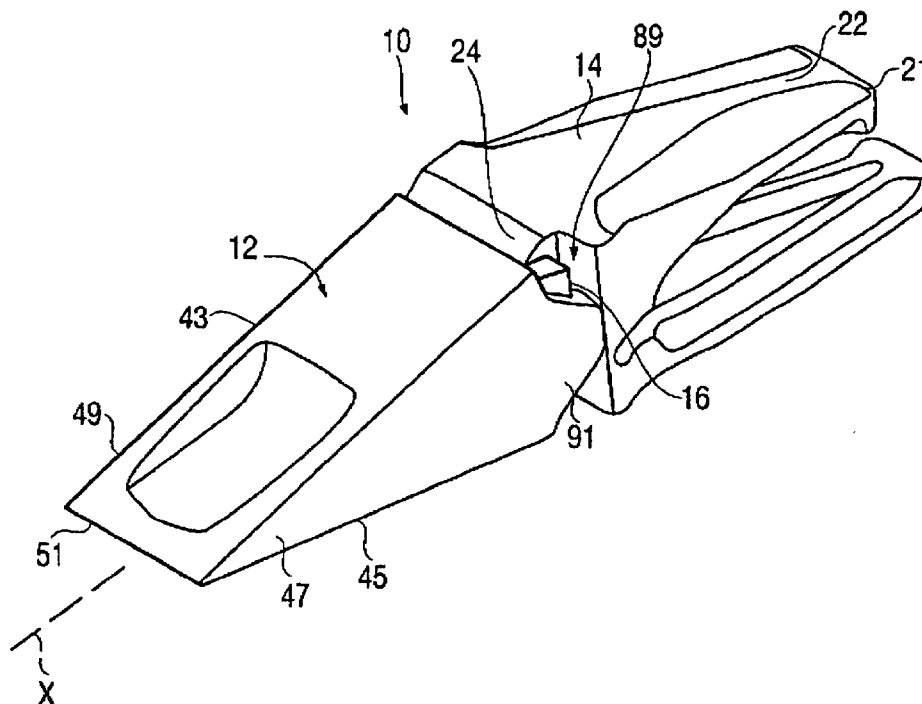

(57) Abstract: A wear assembly includes an adapter (14) with a nose (18), a wear member (12) with a socket (53) to receive the nose (18), and a lock (16) to secure the wear member (12) to the adapter (14). The nose (18) and socket (53) include complementary rails (35) and grooves (65) that vertically diverge as they extend from the front of the nose (18). The lock (16) can have a tapered construction.



WO 03/004783 A3



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

17 April 2003