

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 September 2008 (12.09.2008)

PCT

(10) International Publication Number
WO 2008/108739 A1

(51) International Patent Classification:

H01R 35/04 (2006.01) **H01R 13/64** (2006.01)
H01R 13/10 (2006.01)

(21) International Application Number:

PCT/SG2007/000068

(22) International Filing Date: 8 March 2007 (08.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US):
NANYANG POLYTECHNIC [SG/SG]; 180 Ang
Mo Kio Ave 8, Singapore 569830 (SG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HO, Kin Cheng**
[SG/SG]; Blk 159, #03-174, Yishun Street 11, Singapore
760159 (SG).

(74) Agent: **LAWRENCE Y D HO & ASSOCIATES PTE**
LTD; 30 Bideford Road #02-02, Thongsia Building, Sin-
gapore 229922 (SG).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS,
LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ,
NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU,
SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(54) Title: OMNI-DIRECTIONAL POWER OUTLET COVER

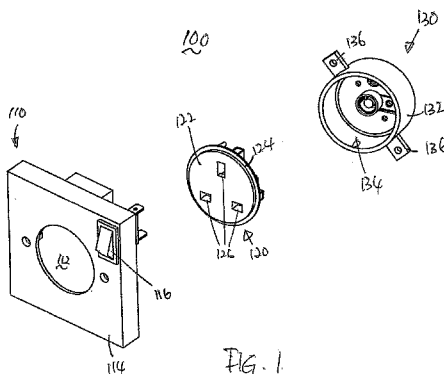

(57) **Abstract:** The present invention provides a rotatable power socket. The power socket comprises a socket panel having three terminals for receiving pins of an electrical plug through apertures defined on the socket panel; a contact pin attaching to the socket panel, the contact pin is electrically in contact with one of the three terminals; a contact assembly mounting at the center of the socket panel, the contact assembly having a inner ring, an insulation ring and an outer ring fitting together concentrically with the insulation ring placed between the inner ring and the outer ring, wherein the inner ring and the outer ring is in contact with the other two terminals respectively; a housing for coupling with the socket panel and supporting it thereon, the housing having a terminal block for receiving power cables; a pin track formed within the housing; and a coupling assembly adapted for coupling with the contact assembly, said coupling assembly having a contact ring and a contact pin mounted concentrically at the center of the housing, wherein when the socket panel is coupled with the housing, the contact pin is fitted to the inner ring and the contact ring is fitted with the outer ring, and the contact pin is in contact with the pin track, thereby when the socket panel is rotating relative to the housing, the contact assembly and the contact pin remains in contact electrically with the coupling assembly and the pin track respectively