

33 1 45 62 04 23

- 1 -

9605544-7

18053
copy.

REPLACED SHEETS		SG
☒	Description : paged1 to paged ...32	
☒	Claim(s) : paged ...32 to paged ...43	
☒	Drawing(s) : paged ...11/32 to paged ...22/32	
☒	Abstract : paged ...44 to paged	
DATE OF RECEIPT		


"Spanning beam structure adapted in particular to the clearing of breaches by vehicles and structure transporting and depositing system." ✓

The present invention relates to a spanning beam structure adapted in particular to the clearing of breaches by vehicles such as armoured vehicles of the Engineer Corps and a system for transporting, on a vehicle, of at least two bridging spanning beams adapted to the clearing of breaches and for depositing spanning beams over or above breaches from the vehicle.

There are already known systems allowing to deposit a spanning beam of short length or of greater length after endwise assembly of two or three spanning beams of short lengths from a vehicle. These known systems however are of an extremely complex and sophisticated design and involve a relatively large overhang or cantilever of a launching girder with respect to the vehicle upon the depositing of spanning beams, which overhang or cantilever has to be taken up by suitable means further increasing the bulk or size and the complexity of the system. Moreover the structure of each one of the spanning beams used in these known systems is complicated too and leads to a relatively great mass or weight of spanning beam.

The object of the present invention is to remove the inconveniences referred to hereinabove by at first providing a spanning beam structure adapted in particular

This Sheet Has Been Replaced



33 1 45 62 04 23

- 2 -

to the clearing of breaches by vehicles such as armoured vehicles of the Engineer Corps, formed of at least one spanning beam element comprising a rigid central box with an upper treadway and two access jibs assembled to both ends of the central box, respectively, so as to extend the trackway of the central box, at least one of the access jibs being upwards swingable and fastened to the central box by a transverse pivot pin and unlockable locking means and which is characterized in that the locking means comprise at least one pair of locking shafts made fast to the upwards swingable access jib and to the central box while extending longitudinally of the central box along the same axis in the locked position of the access jib and two jaw-like members tightly gripping round two mutually confronting heads of the locking shafts.

According to a characterizing feature of the invention the pivot pin of the upwards swingable access jib is located at the upper part of the central box and the locking shafts are located approximately at the bottoms of the access jib and of the central box with both jaw-shaped members accommodated in a lower transverse space defined between the upward swingable access jib and the central box.

Advantageously the spanning beam structure comprises at least one retractable pin for taking up shearing forces exerted upon the locking shafts upon the passage of the vehicles on the aforesaid trackway and extending longitudinally into two coaxial holes of the upwards swingable access jib and of the central box, respectively.

The aforesaid pin is retracted from the hole of the upwards swingable access jib by a control rod with a threaded end screwed into the pin and mounted for rotation about its axis in a block made fast to the central box so as to fully retract the pin into the hole of the central box formed in the block in coaxial relation to the control rod upon the unlocking of the

This Sheet Has Been Replaced



- 3 -

upwards swingable jib.

According to still another characterizing feature of the invention both jaw-like members are operated by a mechanism mechanically connected to the control rod and comprising a plate with a guided longitudinal movement controlled by the control rod and two stubs made fast to both jaw-shaped members, respectively, inserted into two oblique grooves, respectively, of the plate so that the controlled motion of the latter moves both jaw-like members towards or away from each other.

The aforesaid control rod comprises a cross pin made fast to the plate through one longitudinal groove formed in one wall of the aforesaid block and the plate is made fast to the block preferably by two parallel L-shaped guiding rails.

At least one pin for guiding the movement of both jaw-like members towards or away from each other is made fast to the central box of the spanning beam element.

Advantageously the spanning beam structure comprises a reducing mechanism mechanically connected to the drive means of the jaw-like members and made fast to the bottom of the central box so as to be removably coupled to an outer drive motor.

Preferably the other access jib of the spanning beam element is stationary and comprises a transverse bar for locking a hook-shaped portion at the end of a movable jib unlocked from another similar spanning beam element, a member for unlocking the hook-shaped portion from the transverse bar and preferably constituted by a jack made fast to the stationary access jib and the jack rod of which lifts or raises the upwards swingable access jib of the other spanning beam element and at least one locking pin extending longitudinally of the central box and which may be locked by jaw-like members to the locking pin of the central box of the other spanning beam element when the upwards swingable access jib of the latter is locked to the transverse bar.

The spanning beam structure comprises two spanning



33 1 45 62 04 23

- 4 -

beam elements with parallel treadways and the central boxes of which are connected to each other by two connecting arms forming braces and two access jibs forward or rearward of the structure are stationary and upwards swingable, respectively.

The invention also provides a system for the transfer on a road vehicle such as a truck or a lorry of at least two bridging spanning beams superimposed on a frame of the vehicle, which may be assembled end to end and for depositing each one of the spanning beams or both spanning beams assembled end to end above or over breaches to be cleared, each spanning beam having a structure such as previously defined and of the type comprising a girder for supporting and launching one spanning beam or assembled spanning beams and displaceable in relation to the vehicle towards an overhang or cantilever position at the front portion of the latter, means for displacing the spanning beam or assembled spanning beams in relation to the supporting and launching girder to an overhang or cantilever position at the forward portion of the said girder and a plate supporting in guiding relationship the supporting and launching girder and rocking or tilting in relation to the vehicle to allow to deposit the spanning beam or assembled spanning beams and which is characterized in that it comprises at least one controlled hook for depositing the spanning beam or assembled spanning beams, mounted at the end of the supporting and launching girder and capable of assuming a relative position for supporting a shaft for handling the spanning beam or assembled spanning beams, located opposite to that end of the spanning beam or of assembled spanning beams which is bearing upon that bank of the breach to the cleared which is opposite to the vehicle through tilting or rocking of the supporting plate, from which supporting position the hook is lowered for depositing the other end of the spanning beam or assembled spanning beams on that bank of the breach which is close to the vehicle.

This Sheet Has Been Replaced



33 1 45 62 04 23

- 5 -

The overhang or cantilever position of the supporting and launching girder at the front of the vehicle upon depositing the spanning beam or assembled spanning beams is relatively reduced by about one quarter of its full length.

Preferably the means for displacing the spanning beam or assembled spanning beams in relation to the aforesaid girder comprise two endless drive chains arranged on either side of the girder and mounted each one on two toothed wheels fastened to the ends of the girder with the lower side of each drive chain passing or being reeved over three toothed guide wheels arranged according to a triangle configuration and made fast to the supporting and rocking plate, a motor-reduction gear set for simultaneously driving two of the guide pinions of both drive chains, respectively, and fastened to the supporting and tilting plate and at least two pairs of elements forming retractable forks, fastened to both drive chains, respectively, in symmetric relation to the longitudinal center line axis of the girder, each pair of fork-like elements gripping one corresponding projecting portion of the central box of one spanning beam located plumb with a handling shaft underneath the latter.

Both pair of fork-shaped elements are simultaneously brought into a position for gripping aforesaid projecting portions or into a position retracted by a mechanical mechanism operated by a control device fastened to the supporting and rocking plate.

Advantageously each pair of fork-like elements comprises two brackets or dogs pivotally mounted in mutually confronting relationship on two parallel pins of links of one drive chain and the aforesaid mechanism comprises two transverse shafts rotatably mounted in the aforesaid girder and rotated together by two meshing toothed wheels made fast to both transverse shafts, respectively, supporting each one at their ends two external cams pushing two arms, respectively, pivotally mounted on the girder below upper sides of both drive

This Sheet Has Been Replaced



33 1 45 62 04 23

- 6 -

chains so as to lift or raise the corresponding dogs or brackets into a position projecting above the plane passing on the upper sides of both drive chains and a plate pivotally mounted on one single side of the girder and having one of its ends connected to a control rod and its opposite end comprising a notch engaged in pivoting relationship by the end of one arm for pivoting one of the thrust cams, the pivoting plate being thus capable to tilting or rocking between an operative position for locking the dogs or brackets in their aforesaid gripping position and an inoperative position of retracting the dogs or brackets.

The aforesaid control device comprises an element such as a plate perpendicular to the supporting and tilting plate and vertically movable between a low position and a high position and acting in the stationary position of the girder in relation to the supporting and rocking plate upon a roller made fast to the end of one arm swinging in relation to the girder and forming together with the aforesaid control triangle and the notched pivoting plate a parallelogram deformable between both aforesaid positions of tilting of the pivoting plate.

The aforesaid supporting and rocking plate is located at the front of the vehicle and the aforesaid girder has its portion backwards of the supporting and rocking plate, in the rest or inoperative position of the girder, accommodated between both overlying spanning beams and the connecting arms of both overlying spanning beams, with both connecting arms of the lower spanning beam being each one U-shaped and pivotally connected at its ends to both inner side walls, respectively, of both central boxes of both lower spanning beam elements and being capable of being simultaneously raised to a position parallel to the frame and locked to the lower spanning beam, both U-shaped connecting arms thus increasing, in the lowered position, the room or space for housing the girder.

This Sheet Has Been Replaced



33 1 45 62 04 23

- 7 -

The system moreover comprises a means for raising the connecting arms of the inner spanning beam elements, consisting of a lifting table mounted on the frame of the vehicle so as to assume an inoperative lowered position and which may be raised from its inoperative position after retraction of the girder from above the lower spanning beam so as to act upon the lower ends of the U-shaped connecting arms and to move them away from each other to the parallel position of locking of the connecting arms of the lower spanning beam.

Preferably two hooks for supporting both handling shafts, respectively, made fast in confronting relationship to two spanning beam elements, respectively, are provided and are fastened to the ends of two operating chains mounted on two parallel toothed wheels, respectively, at the end of the girder and driven by a reducing mechanism fastened to the girder and controlled by a preferably hydraulic motor fastened to the supporting and tilting plate and mechanically coupled through a removable connection to the reducing mechanism at determined fixed positions of the girder in relation to the supporting and rocking plate.

Each aforesaid hook comprises a latch for locking a handling shaft and arranged to co-operate with the upper edge of the corresponding side wall of the girder upon a controlled displacement of the hook in the direction reverse from that of lowering of the hook so as to be unlocked by the action of an elastic member in a relative position of the hook receiving the corresponding handling shaft and the hook is then displaced over a relatively small stroke simultaneously with the spanning beam in the direction of downward motion of the hook so as to automatically bring the latch into the position of locking the handling shaft in the hook.

The aforesaid girder is displaced in a translatory motion in the longitudinal direction in relation to the supporting and tilting plate by a motor-reducing gear set fastened underneath the said plate driving at least one

This Sheet Has Been Replaced



33 1 45 62 04 23

- 8 -

drive pinion meshing with a longitudinal toothed rack fastened below the girder which comprises at the upper portion tracks forming rails for guiding the spanning beams on which are moving rollers for the travel of the spanning beams.

The system also comprises a device for operating the tilting of the aforesaid supporting plate, comprising two side cables passing over two pulleys, respectively, made fast to the supporting plate rearwards of the tilting axis of the said plate while defining two sides perpendicular to the frame of the vehicle, anchored to the latter and two parallel sides extending along the frame and winding up on two drums, respectively, of a winch driven by a motor-reducing gear set made fast to the frame at the rear of the vehicle.

Advantageously, both aforesaid perpendicular sides have their ends connected to a balancer in the shape of a bar parallel to the frame of the vehicle and mounted for swinging motion about a central longitudinal shaft made fast to a clevis fastened to the frame of the vehicle and the parallel sides are extending back to the pulleys of the supporting plate through the medium of guide pulleys.

The system in addition comprises two pairs of jacks arranged on either side of the vehicle so as to lift the lower spanning beam after disengagement of the upper spanning beam on the girder at the level of the upper spanning beam with a view to couple it endwise of the latter.

Each spanning beam comprises two pairs of front and rear handling shafts, respectively, two handling shafts of each pair being fastened in confronting relationship to both central boxes, respectively, of both spanning beam elements at the upper part thereof.

The invention will be better understood and further objects, characterizing features, details and advantages thereof will appear more clearly as following explanatory description proceeds with reference to the accompanying diagrammatic drawings given by way of non



33 1 45 62 04 23

- 9 -

limiting example only illustrating a presently preferred specific embodiment of the invention and wherein :

- Figure 1 shows a road vehicle provided with a system according to the invention in the transport position and allowing to deposit spanning beams above or over breaches to be cleared ;

- Figure 2 is a view in the direction of the arrow II of figure 1 ;

- Figure 3 is a view similar to that of figure 1 but showing the system in its configuration prior to laying down a spanning beam ;

- Figure 4 is a top view according to the arrow IV of figure 3 ;

- Figure 5 is a view according to the arrow V of figure 3 ;

- Figure 6 shows a side view of a spanning beam according to the invention ;

- Figure 7 is a top view according to the arrow VII of figure 6 of a central portion of the spanning beam ;

- Figure 8 partially shows two spanning beam elements assembled end to end ;

- Figure 9 is an enlarged view of the portion circled at IX of figure 6 ;

- Figure 10 is an enlarged view of the portion circled at X of figure 8 ;

- Figure 11 is an enlarged view of the portion circled at XI of figure 8 ;

- Figure 12 is a view in section taken upon the line XII-XII of figure 11 ;

- Figure 13 is a sectional view showing two jaw-elements of locking pins in the unlocked spread position ;

- Figure 14 is a perspective view of the mechanism allowing in particular to operate the jaw-like elements for locking the locking pins ;

- Figure 15 is an enlarged sectional view showing a bolt for taking up shearing stresses exerted upon the

This Sheet Has Been Replaced



33 1 45 62 04 23

- 10 -

locking pins during the passing of vehicles on the spanning beam ;

- Figure 16 is a view in section taken upon the line XVI-XVI of figure 6 ;

- Figure 17 illustrates a reducing mechanism forming part of the control means for locking the jaw-like elements and the locking bolts ;

- Figure 18 is a view in section taken upon the line XVIII-XVIII of figure 1 ;

- Figure 19 is a view in section taken upon the line XIX-XIX of figure 1 ;

- Figure 20 is a view in section taken upon the line XX-XX of figure 1 ;

- Figure 21 is a view in section taken upon the line XXI-XXI of figure 1 ;

- Figure 22 is an enlarged perspective view of the portion circled at XXII of figure 21 ;

- Figure 23 is a partial longitudinal view of the girder forming part of the system according to the invention ;

- Figure 24 is a view in longitudinal section of the end of the girder ;

- Figure 25 is a view in section taken upon the line XXV-XXV of figure 24 ;

- Figure 26 is an enlarged view of figure 24 showing three different positions which the girder may assume in relation to a tilting support plate of the vehicle ;

- Figure 27 is an enlarged view in section taken upon the line XXVII-XXVII of figure 23 ;

- Figure 28 is a view in section taken upon the line XXVIII-XXVIII of figure 23 ;

- Figure 29 is a diagrammatic view showing a rod and rollers for operating the locking or the unlocking of the fork-like elements ;

- Figure 30 shows a device for controlling the rocking of the girder-supporting plate ;

- Figure 31 is a view seen in the direction of the

This Sheet Has Been Replaced



- 11 -

arrow XXXI of figure 30 ;

- Figure 32 is a top view according to the arrow XXXII of figure 30 ;

- Figure 33 shows a table for lifting the connecting arms of two spanning beam elements ;

- Figure 34 is a top view according to the arrow XXXIV of figure 33 ;

- Figure 35 is a view like figure 33 with the lifting table in the upper position ;

- Figure 36 is a view according to the arrow XXXVI of figure 35 ;

- Figures 37A to 37P show the various steps of assembling three spanning beams to form a spanning beam of greater length and for depositing the latter above a breach to be cleared ; and

- Figure 38A to 38H show the different steps for laying down a spanning beam over a breach to be cleared.

Referring to figures 1 to 36 the reference numeral 1 designates a road vehicle such as a truck or a lorry allowing to carry towards at least one breach to be cleared by vehicles such for instance as armoured vehicles of the Engineer Corps, three spanning beams superimposed on a longitudinal frame 5 of the vehicle and consisting of an upper spanning beam 2, an intermediate spanning beam 3 and a lower spanning beam 4, respectively.

The vehicle 1 comprising a double front cabin 6 extended rearwards by the longitudinal frame 5 supports a system adapted for separately depositing the spanning beams 2, 3, 4 over or above breaches or to assemble at least two spanning beams end to end and to deposit the assembled spanning beams above a breach.

The spanning beams 2, 3 and 4 are identical and are each one formed of two parallel spanning beam elements 2a, 2b ; 3a, 3b ; 4a, 4b assembled by two connecting arms forming braces 2c, 3c and 4c. Both spanning beam elements of each spanning beam 2, 3, 4 comprise two parallel top trackways 2d, 3d and 4d.



33 1 45 62 04 23

- 12 -

According to the invention each spanning beam element comprises a rigid central box 7 and two access jibs 8, 9 assembled to both ends of the central box 7, respectively, so as to extend the top trackway of the central box. The access jib 8 is fastened at the upper part of the central box 7 by a transverse pivot pin 10 and at the lower part of the central box 7 by locking means which are unlockable so as to allow the jib 8 to be raised or swung upwards about its pivot pin 10. These locking means comprise at least two locking shafts or bolts 11, 12 made fast to the movable access jib 8 and to the central box 7, respectively. By way of example twenty pairs of locking bolts 11, 12 are provided in parallel relationship in a same plane forming the bottom of the spanning beam element. Thus the locking shafts or bolts 11, 12 in the locked position of the movable jib 8 are extending in parallel relation to the longitudinal axis of the spanning beam element with two shafts or bolts of a same pair being aligned. The locking means moreover comprise two jaw-like members 13, 14 tightly gripping round or clamping mutually confronting heads 15, 16, respectively, of the locking bolts 11 and 12. Both jaw-shaped members 13, 14 are arranged transversely of the longitudinal axis of the spanning beam element within a lower space 17 defined between the movable access jib 8 and the central box 7. For taking up the shearing forces exerted upon the locking bolts 11, 12 upon the passing or travelling of vehicles on the trackway of each spanning beam element, there are provided two longitudinal retractable pins 18 of which a single one is shown and located on either side of both ends of the two jaw-like members 13, 14, respectively. Each pin 18 in the locked position of the movable jib 8 extends into two coaxial passage-ways or holes 19, 20 formed in the movable jib 8 and in a block 21, respectively, secured to the central box 7 by fastening screws 22. Each pin 18 comprises a thoroughfare tapped hole 23 into which is screwed one threaded end of a control rod or spindle 24 mounted for

This Sheet Has Been Replaced



33 1 45 62 04 23

- 13 -

rotation about its longitudinal center line axis in the block 21. The control rod 24 extends longitudinally of the central box 7 to a first reducing mechanism 25 fastened at the bottom of the central box 7. The reducing mechanism 25 is driven by a transverse shaft 26 itself rotated by a second central reducing mechanism 27 also fastened at the bottom of the central box 7. The reducing mechanism 27 may be actuated by an external preferably hydraulic motor, removably coupled to the reducing mechanism 27 as will be explained later. Advantageously as better shown on figure 14, both jaw-shaped members 13, 14 and both pins 18 of a spanning beam element are simultaneously operated by a control mechanism comprising in the vicinity of each one of the ends of the jaw-like members 13, 14 a plate 28 fastened to the block 21 in guided relationship, for instance by two guide rails 29 so as to be capable of displacing itself along a longitudinal direction between two end positions of closing of the jaw-like members 13, 14 and of insertion of each pin 18 into the corresponding passage-way 19 and of opening of the jaw-like members 13, 14 and of full retraction of each pin 18 into the corresponding passage-way 20 of the block 21, respectively. For that purpose each plate 28 is driven in a longitudinal translatory motion by a stub shaft 30 made fast to the corresponding pin 18 and extending through a longitudinal groove 31 of a wall of the block 21 while having its end made fast to one face of the movable plate 28 the opposite face of which comprises two oblique grooves 32 into which are inserted two transverse studs 33, respectively, fastened to the ends of both jaw-shaped members 13, 14. Thus to obtain the unlocking of a movable access jib 8, the external hydraulic motor is coupled to the reducing mechanism 27 and operated for rotating the spindles 26 which are themselves rotating both control rods 24 causing the longitudinal displacement of the pins 18 into the fully retracted position into the passage-ways 20 of the blocks 21. The displacement of the

This Sheet Has Been Replaced




33 1 45 62 04 23

- 14 -

pins 18 causes a concurrent displacement of both plates 28 towards the right with respect to figure 14 so as to spread apart both jaw-like members 13, 14. Reversely a displacement by the control rods 24 of the pins 18 in the passage-ways 19 of the movable access jib in the lowered position causes a displacement towards the left of the plates 28 and thereby the movement of both jaw-like members 13, 14 towards each other into the locking position of the locking bolts 11, 12. The relative displacement of both jaw-like members 13, 14 is provided by two parallel guide shafts 34 located in the vicinity of both ends of both jaw-shaped members 13, 14 and made fast to the central box 7 of the spanning beam element.

The access jib 9, opposite to the movable jib 8 of each spanning beam element is stationary and comprises at its upper part a transverse bar 35 adapted for the locking of one hook-shaped portion 36 at the end of an unlocked movable jib 8 of another spanning beam element. The bar 35 and the hook-shaped portion 36 are shaped so as to prevent the movable jib 8 from escaping the locking bar 35. The stationary access jib 9 moreover comprises at least one locking bolt 37, for instance twenty parallel locking bolts located in the plane forming the bottom of the spanning beam element while extending longitudinally so as to project from the end of the stationary jib 9. Each locking bolt 37 is identical with the locking bolts 11, 12 and therefore comprises a locking head 38 coming in front of a locking head 16 of a corresponding locking bolt 12 of the central box 7 when the spanning beam element comprising the locking bolts 37 is assembled end to end with the other spanning beam element comprising the locking bolts 12. Such an assembly of elements of spanning beams is shown in part on figure 11 which shows that the locking bolts 37 are made fast to the locking bolts 12 by both jaw-like members 13, 14. Figure 8 illustrates two spanning beam elements assembled end to end wherein the movable jib 8 of the spanning beam element at the right with respect to this figure is



33 1 45 62 04 23

- 15 -

resting upon the stationary jib 9 of the left spanning beam element while being locked by the hook-shaped end portion 36 at the locking bar 35 of the stationary access jib 9 with the locking bolts 37 of the stationary access jib 9 being locked to the locking bolts 12 of the central box of the right spanning beam element by both jaw-like members 13, 14. In the assembled positions of two spanning beam elements, the movable jib 8 provides for the continuities of the top trackways of both spanning beam elements. The stationary jib 9 of each spanning beam element also comprises two jacks 39 fastened in the jib 9 at right angles to the bottom thereof and adapted to lift the movable jib 8 of another spanning beam element for unlocking the hook-shaped portion 36 from the locking bar 35 of the stationary access jib 9. The rod of the jack 39 is fully retracted into the stationary access jib 9 in the rest position and its end is acting below the movable access jib 8 for unlocking it from the stationary access jib 9.

Both elements of a spanning beam are assembled by their connecting arms forming braces in such a manner that the spanning beam may have available at each one of its ends, two movable and stationary access jibs 8 and 9, respectively, so that the spanning beams may be coupled to each other irrespective of their direction of presentation to each other. Each access jib has of course the same width as that of the corresponding central box and in the configuration of the spanning beam laid down or deposited over a breach, the opposite retractable jibs thereof are locked at their lower part to their supporting central box.

As shown on figure 7, both connecting arms forming braces 3c of both elements 3a, 3b of the intermediate spanning beam 3 have each one the shape of a U the top ends of which are pivotally fastened by pins 40 to both central boxes 7 of both spanning beam elements so that they may swing about these pins between a lowered position between both spanning beam elements



33 1 45 62 04 23

- 16 -

substantially perpendicular to the plane passing through the top trackways and an upwards swung or raised position substantially parallel to this plane. In the upwards swung or raised position both connecting arms 3c are automatically locked at the level of their bases to both boxes of both spanning beam elements by locking members 41 as explained further on.

Each spanning beam 2, 3, 4 moreover comprises two pairs of front and rear running rollers 42 fastened in confronting relationship to both internal side walls, which are confronting each other, of both spanning beam elements, respectively.

The system for depositing the spanning beams 2, 3, 4 comprises a longitudinal launching and depositing girder 43 extending in the rest or inoperative position substantially throughout the the whole length of the vehicle 1 while being accommodated for a great part in a longitudinal space or room defined between two overlying upper and intermediate spanning beams 2 and 3 and the upper connecting arms 2c of the spanning beam 2 and the connecting arms 3c of the spanning beam 3 in the lowered position, the latter thus allowing to increase the height of housing of the girder 43 between the connecting arms. The girder 43 comprises at its upper portion two side shoulders 44 forming two rails for guiding rollers 42 for the travel of each one of the spanning beams. The girder 43 is supported while being guided therein in longitudinal translatory motion by a supporting plate 45 which is fastened in pivoting relationship to the frame of the vehicle by a transverse pivot pin 46 so as to be capable of tilting about this pivot axis in the counter-clockwise direction for depositing the spanning beams. The guiding of the girder 43 is performed by a lower T-shaped tenon of the girder 43 engaging a mortise of complementary mating shape of the supporting plate 45. The girder 43 is driven in relation to the supporting plate 45 by a motor-reducing gear set 47 fastened underneath the supporting plate 45 driving two drive

This Sheet Has Been Replaced



33 1 45 62 84 23

- 17 -

pinions 48 meshing through the bottom of the support 45 with two parallel longitudinal toothed racks 49 fastened below the girder 43. The rocking or swinging of the supporting plate 45 is obtained by a control device 50 (see in particular figures 30 to 32) comprising a motor-reducing gear set 51 fastened to the frame 5 at the rear of the vehicles and driving a cross-shaft 52 by a drive belt 53-pulley 54 mechanism made fast to the shaft 52 both ends of which are kinematically connected to a transverse rotary shaft 55 supporting two winch drums 56 on which are winding up two parallel cables 57 for tilting the supporting plate 44. The cables 57 comprise two parallel longitudinal portions 57a passing over two return pulleys 58, respectively, fastened to the frame 5 so as to define two substantially vertical cable portions 57b passing on two control pulleys 59 secured to two yokes 60 themselves fastened underneath the supporting plate 45. Both cables 57 are extending beyond the pulleys 59 with two substantially vertical cable portions 57c the ends of which are fastened to both ends, respectively, of a transverse bar 61 forming a swinging member with a longitudinal central shaft rotatably mounted in a clevis 62 made fast to the frame 5. The shafts 52 and 55 are rotatably mounted in a yoke-shaped support 63 and the rotary driving of the shaft 55 by the shaft 52 may be carried out for instance by a system of pulleys secured to the ends of the shafts 52, 55 and two drive belts reeved on these pulleys. The tilting of the supporting plate 45 takes place when a spanning beam or at least two spanning beams assembled end to end are in a cantilever or overhang position with respect to this plate so as to exert a force tending to naturally rock the latter. In such a situation it then suffices to put the motor-reducing gear set 51 into operation so that the drums 56 be rotated in the direction of paying out or unwinding of the cables 57.

The system moreover comprises means for displacing one spanning beam or two spanning beams assembled end to

This Sheet Has Been Replaced



33 1 45 62 04 23

- 18 -

end in relation to the supporting girder 43. These means comprise two endless drive chains 64 arranged on either side of the girder 43 in symmetrical relation to the latter and each one mounted on two toothed wheels 65 fastened to both ends of the girder 43 with the lower side 64a of each chain 64 passing over three toothed guide wheels 66 arranged in a triangular configuration and rotatably mounted on the supporting plate 45. More specifically both toothed wheels 66 of a same side of the beam forming the base of the triangle are mounted for free rotation on a transverse support shaft projecting from the supporting plate 45 whereas the lower toothed pinion 66 forming the apex of this triangle is bound in rotation to a transverse shaft 67 rotatably mounted on support bearings 68 made fast to the supporting plate 45. The shaft 67 comprises a pulley 69 rotated by a drive pulley 70 connected to the pulley 69 by a belt (not shown) and made fast to the end of an output shaft of a motor-reducing gear set 71 made fast to the supporting plate 45. Thus the motor-reducing gear set 71 would simultaneously drive both lower toothed guide wheels 66 located on either side of the girder 43. The means for displacing the spanning beams in relation to the girder 43 also comprise two front pairs of retractable fork-shaped elements 72 made fast to both upper sides 64b, respectively, of both drive chains 64 and two rear pairs of retractable fork-like elements 72 also made fast to both upper sides 64b, respectively, of both chains 64. Both front pairs of fork-like elements 72 are adapted to grip two projecting finger-shaped portions 73 made fast to two spanning beam elements, respectively, and located plumb with two rollers 42 above which are located in a same vertical plane two forward handling shafts 74 arranged in confronting relationship with each other. Likewise both rear pairs of fork-shaped elements 72 are adapted to grip two projecting finger-like portions 73, respectively, made fast to two spanning beam elements, respectively, rearwards of the latter, plumb with two



33 145 62 04 23

- 19 -

running rollers 42 above which are respectively located two back handling shafts 74 arranged in confronting relationship with each other. Both pairs of fork-like elements 72 are simultaneously brought in the position of gripping the fingers 73 or in a retracted position by a mechanical mechanism operated by a control device fastened to the supporting plate 45. Each pair of fork-like elements consists of two brackets or blocks mounted in pivoting confronting relationship on two parallel pins, respectively, of links of a drive chain 64. Figure 27 shows one of the two brackets or blocks 72 swingably mounted at one of its ends onto a pin 75 for the connection of parallel links of the chain 64 and having its opposite end comprising a lower heel-like portion 76 caused to bear in the position of gripping the bracket 72 below the pin 77 for the connection of the links of the chain 64 adjacent to the pin 75. Thus each bracket or block 72 is movable between two parallel links of the chain 64. Advantageously a spiral spring 78 is provided on the pin 75 so as to urge each bracket 72 into the retracted position as shown by the arrow A. The aforesaid mechanical mechanism comprises two transverse shafts 79 rotatably mounted in the girder 43 and rotated together by two toothed wheels 80 meshing with each other and made fast to both shafts 79, respectively. At the end of each one of the two shafts 79 are fastened cams 80 located outside of the girder 43 and each one arranged underneath an arm 82 pivotally mounted at one of its ends on the girder 43. Each pivoting arm 82 is arranged below a bracket 72 so as to lift the bracket 72 to a position of gripping a finger 73 projecting above the plane passing through the upper sides 64b of the chains 64 under the action of the corresponding cam 81. One of the four cams 81 associated with both front and rear pairs of fork-like elements 72 is extended by an arm 83 the end of which pivotally engages a notch 84a of a plate 84 pivotally mounted about a shaft 85 on the girder 43. The plate 84 forms in a way a lever having one arm-like



33 1 45 62 64 23

- 20 -

portion acting upon the arm 83 and another lever arm-like portion the end of which is pivotally connected to a control rod 86 extending longitudinally of the beam 43. The rod 46 is also pivotally connected to the end of the other plate-shaped lever 84 associated with both other pairs of fork-like elements 72. Three control rollers 87 are fastened to the free ends, respectively, of three arms 88 pivotally fastened to the girder 43, these free ends being also connected pivotally to the rod 86. Thus the assembly consisting of the plates 84, the rod 86 and the arms 88 forms a deformable parallelogram so as to cause both plates 84 located on one single side of the girder 43 to simultaneously tilt from the position of retracting the brackets 72 shown at the left on figure 23 to the position of gripping the brackets 72 by the drive fingers 73, shown at the right of this figure. With each plate 84 is associated a spring 89 having one of its ends fastened to the girder 43 and its end opposite to the pivot point of the plate 84 fastened to the rod 86 so as to keep each plate 84 in both end positions of retracting and gripping the brackets 72, respectively. The device for controlling the mechanism for displacing the brackets 72 comprises an element such as a vertical plate 90 fastened to the supporting plate 45 and vertically movable between a lower position and an upper position so as to act upon the rollers 87 and thus cause the desired tilting of the plate 84 to the retracted position or to the position of gripping the brackets 72. More specifically the plate 90 is arranged in the same vertical plane as the rollers 87 and has its two ends shaped as isosceles triangles the vertices of which are longitudinally aligned. Thus in the lower position of the plate 90, the upper side of either one of the triangles is acting to push one of the rollers 87 upwards and therefore to retract the brackets 72 whereas in the upper position of the plate 90, the lower side of either one of the triangles is acting to push one of the rollers 87 downwards and therefore to bring the brackets 72 into the



33 1 45 62 04 23

- 21 -

position of gripping the fingers 73. The vertical displacement of the plate 90 is provided by two parallel arms 91 pivotally connected with their ends to the plate 90 and to the supporting plate 45 and a jack 92 with a double rod having their ends pivotally connected to the point of pivotal connection of one of the arms 91 to the supporting plate 95 and to the point of pivotal connection of the other arm 91 to the plate 90, respectively.

The system also comprises two operated hooks 93 for locking both confronting handling shafts 74, respectively, of both spanning beam elements of a spanning beam and fastened to the ends of two drive chains 94 arranged in symmetrical relation to the longitudinal center line axis of the girder 43 and passing over two parallel toothed wheels 95, respectively, rotatably mounted at the end of the girder 43 while being perpendicular with respect to the bottom of the latter. Both toothed wheels 95 are bound in rotation to a transverse shaft 96 rotatably mounted between two side walls 43a of the girder 43. Two pulleys 97 parallel to the toothed wheels 95 are also bound in rotation to the shaft 96 and driven by two drive pulleys 98 kinematically connected to the pulleys 97 by two belts 99. Both drive pulleys 98 are each one made fast to an output shaft of a reducing mechanism 100 fastened to the girder 43. Each control chain 94 passes below a toothed guide pinion 101 mounted for free rotation at the end of the corresponding output shaft of the reducing mechanism 100 and has its free end connected to the end of one compensation spring 102 having its opposite end fastened to the bottom of the girder 43. The input shaft of the reducing mechanism 100 is driven by a first reducing mechanism with pulleys 103, 104 kinematically connected by a belt (not referred to), the shaft 105 driving the pinion 104 extending through the bottom of the girder 43 and having at its lower end a rotary coupling plate 106 capable of being driven by a hydraulic motor 107 as will

This Sheet Has Been Replaced



33 1 45 62 04 23

- 22 -

be explained hereinafter. The drive shaft 104 also drives an upper pulley 108 of the same diameter as the diameter of the pulley 104 kinematically connected by a drive belt 109 to a pulley 110 made fast to the end of a rotary shaft 111 having its lower end made fast to a rotary coupling plate 112 like the plate 106. The shaft 111 drives a second pulley 113 like the pulley 110 coupled by a belt 114 to a pulley 115 made fast to a rotary drive shaft 116 extending through the bottom of the girder 43 and the lower end of which is made fast to a rotary coupling plate 117 identical with the plates 106 and 112. As shown on figure 26, the girder 43 may assume with respect to the motor 107 fastened underneath the supporting plate 45 three distinct stationary positions a, b, c at each one of which the motor 107 is removably coupled to the corresponding plates 106, 112 and 117. At each one of the positions a, b, c, one of the rollers 87 is lying in the plane of the plate 90 in order that the latter may lock or unlock the fingers 73 to or from the fork-like elements 72. Figure 26 shows the plate 112 for driving the shaft 113 ready to be coupled for rotation to an output plate of the motor 107. The output plate of the motor 107 is of the type comprising fingers or claws engaging cavities of shapes complementary of or mating with that of the plate 106, 112 or 117. This output plate is mechanically coupled to a bar with a toothed rack 118 axially guided in a direction transverse to the supporting plate 45 and meshing with a toothed segment 119 rotated about a shaft 120 fastened to the plate 45 by a control jack 121 and a lever arm 122. The shaft with the toothed rack 118 is shown in inoperative position of disengagement of the output plate of the motor 107 from the coupling plate 112.

Each hook 93 comprises a latch 93a for locking one handling shaft 74 constantly urged back into unlocking position by a spring 123. As shown on figures 23 and 24, both hooks 93 may assume three positions X, Y and Z. In the position Z of depositing spanning beams, both



33 1 45 62 04 23

- 23 -

handling shafts 74 are accommodated within both hooks 93, respectively, without being locked by the latches 93a. Each end of the side wall 43a of the girder 43 has a flange 43b shaped as a cam co-operating with the end of the latch 93a of the hook 93 in the same plane as the side wall 43a so as to bring the latch 93a into the position of unlocking a handling shaft 74 when the hook 93 is in the position X and this under the biasing action of the spring 123. In the position Y, the latch 93a of each hook 93 assumes the position of locking a handling shaft 74 since the flange 43a is acting as a cam pushing the latch 93a against the return force of the spring 123.

Figures 33 to 36 show the device for raising both connecting arms 3c of the intermediate spanning beam 3. This device comprises a raising table 124 assuming in the position of conveyance of the spanning beams, the lowered position shown on figure 33 in which the ends of both connecting arms 3c are resting upon the table 124. The latter is fastened to the frame 5 of the vehicle through the medium of pivotally connected arms 125 perpendicular to the frame 5 and defining a parallelogram deformable under the action of a jack-like member 126. More specifically both lower arms of the deformable parallelogram are extended by portions 125a fastened pivotally to the frame 5 whereas the upper arms of these parallelograms are extended by portions 125b pivotally fastened below the table 124. The table 124 consists of a frame 124a supporting for sliding motion along the longitudinal center line axis of the vehicle two small tables 124b connected to each other by two parallel arms 127 pivotally connected on the one hand to both small tables 124b and on the other hand to both ends of a central lever 128 pivotally mounted at its center about a pin perpendicular to the frame 5 of the vehicle. The arms 127 and the lever 128 allow both small tables 124b to move away from each other as the table 124 is raised so that the ends of the connecting arms 3c be constantly



33 1 45 62 04 23

- 24 -

bearing upon both small tables 124b until they reach their raised position parallel to the frame 5 of the vehicle. In the upper position of the lifting table 124, the connecting arms 3c are locked to the spanning beam elements by locking members 41. Such members may consist of a hook pivotally mounted on the corresponding spanning beam element and operated by a jack mounted on a small table 124b so as to rock the hook into the position of locking a locking pin made fast to the corresponding connecting arm 3c.

The system also comprises a casing 129 located in the longitudinal center line axis of the vehicle at the rear of the latter and usable as a support for the back end of the girder 43 in the transport position of the spanning beams and a jack 103 mounted on the frame 5 of the vehicle just rearwards of the cabin 6 along the longitudinal center line axis of the vehicle and adapted in particular to lift the girder-upper spanning beam assembly at the beginning of the launch of the upper spanning beam.

The system at last comprises a device forming an antirocking foot of the vehicle located forward thereof and comprising a plate 131 pivotally connected to both free ends of two jack rods 132 pivotally connected to the frame of the vehicle and capable of being folded back into an inoperative position stowed within the vehicle as shown on figure 1 and two pairs of jacks 133 fastened to the frame 5 of the vehicle in symmetrical relation to the longitudinal center line axis of the latter so as to lift the spanning beams above the frame 5.

The principle of depositing three spanning beams assembled end to end which already appears in part from the above description of the system will be set forth in detail with reference to figures 37A to 37P.

The vehicle 1 conveys the three overlying spanning beams to the place where the breach B to be cleared is located and is approaching the latter until reaching the location shown on figure 37A. In the initial conditions,

This Sheet Has Been Replaced




33 1 45 62 04 23

- 25 -

the upper spanning beam 2 is connected to both chains 64 by the fork-like elements 72 enclosing the finger-shaped portions 73 of the upper spanning beam elements 2. The vehicle 1 is thus located in front of the breach in the transport position shown on figure 1. The device forming the anti-rocking foot is extended so that the plate 131 bears upon the ground and the jack 130 is activated for slightly lifting the girder 43-upper spanning beam 2 assembly from the supporting box 122 so as to release the upper spanning beam from the intermediate spanning beam 3. The motor-reducing gear set 47 is activated so as to displace in relation to the supporting plate 45 the unitary assembly formed of the girder 43 and of the upper spanning beam 2 to the most overhanging position of the girder forward of the vehicle, in which position the hydraulic motor 107 has its output shaft mechanically coupled to the plate 117 driving the shaft 116 supporting the pulley 115. The system is thus in the position shown on figure 37A. As shown on figure 37B the upper spanning beam 2 is longitudinally displaced on the girder 43 by energizing the motor-reducing gear set 71 driving both drive chains 64. The transfer of the spanning beam 2 is effected until both front handling shafts 74 of the spanning beam 2 are engaging both hooks 93, respectively, in the position X which are brought into the position Y of locking the handling shafts 74 by the motor-reducing gear set 100 energized by the hydraulic motor 107 at the same time as the upper spanning beam 2 is advanced over a small distance forwards with respect to the girder 43. Then the jack 126 controlling the table 124 is actuated so that the table 124 lifts both connecting arms 3c of the intermediate spanning beam 3 up to their position of locking to the corresponding spanning beam elements, in which they are locked. Once the table 124 has again been lowered into inoperative position, both pairs of side jacks 133 are energized so as to lift both overlying intermediate and lower spanning beams 3 and 4 until the intermediate spanning beam 3 be substantially on the same

This Sheet Has Been Replaced



33 1 45 62 04 23

- 26 -

level as the upper spanning beam 2 and the fork-like elements 72 are brought into the inoperative retracted position by deforming the deformable parallelogram consisting of the plates 84, the rod 86 and the arms 88 by the plate 90 acting upon the corresponding roller 87. The motor 107 is disengaged from the plate 117 driving the shaft 116.

As shown on figure 37C, the girder 43 and the upper spanning beam 2 which is connected thereto by the hooks 93 are displaced in relation to the supporting plate 45 rearwards to the position wherein the motor 107 is coupled to the plate 112 driving the shaft 111 with the back portion of the girder 43 inserting itself between both intermediate and lower spanning beams 3 and 4. In this position the plate 90 is lowered to lock the hook-like elements 72 to both finger-shaped front portions 73, respectively, of the intermediate spanning beam 3. The motor-reducing gear set 71 is energized so that the drive chains 64 are displacing the intermediate spanning beam 3 towards the rear end of the upper spanning beam 2. Initially the raisable rear access jib of the spanning beam 2 and the raisable front access jib of the spanning beam 3 are unlocked. While the intermediate spanning beam 3 is moving towards the upper spanning beam 2, the jacks 39 for lifting the access jibs are energized for lifting the raisable access jibs 8. The access jib 8 of the upper spanning beam 2 engages with its end over the corresponding stationary jib 9 of the intermediate spanning beam 3 whereas the jib 8 of the intermediate spanning beam 3 engages with its end upon the stationary jib of the upper spanning beam 2 and the hook-like portions 36 of the liftable jibs 8 are engaging transverse bars 35, respectively, of the stationary jibs 9. Simultaneously the locking shafts 37 of the stationary jibs 39 are locked to the locking shafts 12 by jaw-like members 13 by rotating through the corresponding hydraulic motor (not shown) and the guiding mechanisms 24, 27 the control rods 24 about their longitudinal

This Sheet Has Been Replaced



33 1 45 62 04 23

- 27 -

center line axes. This hydraulic motor is fastened underneath the supporting plate 45 and is removably coupled to the guiding mechanism 27 in the same manner as the motor 107. The hydraulic motor for operating the jaw-like members 13 is then withdrawn from the guiding mechanism 27 and both assembled spanning beams 2, 3 are withdrawn from the hooks 93 by moving back through the drive chains 64 both assembled spanning beams and by simultaneously bringing both hooks 93 from the state Y to the state X for unlocking and disengaging the hooks 93 from both front handling shafts 74 of the upper spanning beam 2. The hooks 93 are then brought into the position Z. Figur 37D shows both spanning beams 2, 3 assembled end to end.

As shown on figure 37E, the assembled spanning beams 2, 3 are displaced in relation to the girder 43 by the drive chains 64 into an overhang position in relation to the girder 43 such that the front handling shafts 74 of the intermediate spanning beam 3 are inserted into the hooks 73 brought from the position Z to the position X and the spanning beams 2, 3 are moved forwards with respect to the girder 43 with a concurrent displacement of the hooks 93 from the position X to the position Y for their locking the handling shafts 74 of the intermediate spanning beam 3. Then the fork-like elements 72 are brought into the retracted position so as to disconnect the fingers 73 of the intermediate spanning beam from the drive chains 94 and the motor 107 is disconnected from the plate 112 driving the shaft 111.

In order to disengage the rear portion of the girder 43 from the lower spanning beam 4, the girder 43 together with the assembled spanning beams 2, 3 is brought into its most overhanging position forward of the vehicle as shown on figure 37F. Then the side jacks 133 are operated so as to lift the upper spanning beam 4 substantially to the same level as the assembled spanning beams 2, 3 (figure 37G). Figure 37H shows that the girder 43 at the same time as the assembled spanning beams 2, 3

This Sheet Has Been Replaced



- 28 -

has been moved backwards in relation to the supporting plate 45 into the position wherein the motor 107 is again coupled to the plate 112 driving the shaft 111. In this position the fork-like elements 72 are brought plumb with the finger-like front parts 73 of the lower spanning beam 4 and are brought by the plate 90 into the operative position of gripping the finger-like parts 73. The drive chains 64 are controlled so as to move the lower spanning beam 4 backwards of the intermediate spanning beam 3 and the jacks 39 for lifting the movable jibs 8 are energized to allow the endwise assembly of the lower spanning beam 4 to the intermediate spanning beam 3 in the same manner as for the endwise assembly of the spanning beams 2 and 3 as previously explained, it being understood that initially the movable jibs 8 of the intermediate and lower spanning beams, respectively, are unlocked. Once the spanning beams have been assembled as shown on figure 37I, the lifting jacks 39 are brought into the inoperative position, the motor controlling the jaw-like members 13 is disengaged from the reducing mechanism 27, the jacks 133 for lifting the spanning beams are brought into an inoperative position and the motor 107 is withdrawn from the plate 112 driving the shaft 111.

As shown on figure 37J, the girder 43 is moved to the most overhanging position forward of the supporting plate 45 and the motor 107 is coupled to the plate 117 driving the shaft 116. The spanning beams 2, 3, 4 are moved backwards with respect to the girder 43 by the drive chains 64 with the simultaneous displacement of the hooks 93 from the position Y to the position X for disengaging the handling shafts 74 from the intermediate spanning beam 3, the hooks 93 being then brought into the position Z. Figure 37K shows that the assembled spanning beams 2, 3, 4 are moved in relation to the girder 43 by the drive chains 64 to an overhanging position wherein the front handling shafts 74 of the lower spanning beam 4 are locked within the hooks 93 in the manner already previously described. Then the fork-like elements 72



33 1 45 62 04 23

- 29 -

connecting the lower spanning beam 4 to the drive chains 64 are brought into the retracted position by the plate 90 and these fork-like elements 72 are brought plumb with the rear finger-like parts 73 of the lower spanning beam 4 for gripping the latter. Once the lower spanning beam 4 has been disconnected from the drive chains 64, the assembled spanning beams 2, 3, 4 are moved rearwards with respect to the girder 43 by the drive chains 64 with a simultaneous displacement of the hooks from the position Y to the position X for disengaging the handling shafts 74 of the lower spanning beam from the hooks 93 which are retained in the position X.

The motor-reducing gear set 51 is put into operation so as to drive the drums 56 in the direction of paying out or unwinding the cables 57 thereby causing the tilting of the supporting plate 45 and therefore of the girder 43-spanning beams 2, 3, 4 assembly so as to lay the end of the upper spanning beam 2 down upon the bank opposite to the vehicle. As shown on figure 37L, the whole of the spanning beams is disengaged from the girder 43 so as to form an angle of the spanning beams with respect to the girder of about 3° . The motor 107 is then disengaged from the plate 112 driving the shaft 111.

The girder 43 is then moved backwards with respect to the supporting plate 45 to a relative position such that the motor 107 may be coupled to the plate 106 driving the shaft 104 and at the same time the spanning beams are displaced with respect to the girder 43 by the drive chains 64 travelling in a translatory motion over the toothed wheels 65, 66 to a position such that the rear handling shafts 72 of the lower spanning beam 4 are engaging and locking themselves into the hooks 93 successively at the positions X and Y, the hooks 93 being then brought to the position Z. The rear finger-like parts 73 of the lower spanning beam 4 are automatically disengaging from the fork-like elements 72 when the hooks 93 are in the position Y as this besides is shown on figure 23. The drive chains 64 are operated so as to

This Sheet Has Been Replaced



33 1 45 62 04 23

- 30 -

bring the fork-like elements 72, being still in the operative gripping position, back to their initial position of figure 37A.

From the position shown on figure 37M, the motor-reducing gear set 51 is again put in operation to wind the cables 57 up onto the drums 56 and thus to bring the whole of the supporting plate 45 and the girder 43 back to the horizontal position as shown on figure 37N. In this depositing position the girder 43 has an overhang with respect to the vehicle relatively reduced by about the quarter of its full length. Then the motor 107 is energized for causing the hooks 93 to move downwards and thus for depositing the assembled spanning beams 2, 3, 4 over the breach B as shown on figure 37-O. The hooks 93 are then disengaged from the handling shafts 74 of the lower spanning beam 4 and the motor-reducing gear set 51 would bring the hooks 93 back to their position X. The motor 107 is disengaged from the plate 106 driving the shaft 105 and the girder 43 is brought back to the initial transport position. The vehicle may then clear the breach B by passing on the bridge provided by the assembled spanning beams 2, 3, 4 to recover the spanning beams on the opposite bank. The picking-up again of the spanning beams from the ground is of course effected according to the different steps considered when starting from figure 37-O and proceeding to figure 37A.

Figures 38A to 38H show the steps for depositing one single spanning beam, the upper spanning beam 2 in the present case.

From the transport position shown on figure 38A, the whole of the girder 43 and spanning beam 2 connected to the latter by the fork-like elements 72 is displaced in relation to the supporting plate 45 to an overhang or cantilever position forward of the vehicle in which the motor 107 is coupled to the plate 112 driving the shaft 111.

The spanning beam 2 is displaced in relation to the girder 43 from the position shown on figure 38B to

This Sheet Has Been Replaced



33 1 45 62 04 23

- 31 -

the position shown on figure 38C in which the front handling shafts 74 of the spanning beam 2 are engaging and are locked themselves within the hooks 93 as already explained previously. The motor 107 is disengaged from the plate 112 driving the shaft 111.

Then as shown on figure 38D, the girder 43 is displaced in relation to the supporting plate 45 to its most cantilever or overhang position forward of the vehicle in which the motor 107 is coupled to the plate 117 driving the shaft 116.

Prior to the tilting of the supporting plate 45-girder 43 system, the handling shafts 74 of the spanning beam 2 are unlocked from the hooks 93 in the manner already set forth previously and the hooks 93 are brought to the position X. Figure 38E shows the tilting of the girder 43 and figure 38F shows how the end of the spanning beam 2 is caused to bear on the bank opposite to the vehicle with the spanning beam 2 defining an angle of about 3° with respect to the girder 43.

The girder 43 is then moved backwards in relation to the supporting plate 45 to a position identical with that of figure 37M, thereby displacing the chains 64 in a translatory motion on the toothed wheels 65, 66 so as to move the spanning beam 2 in relation to the girder 43 until the rear finger-like parts of the spanning beam 2 are automatically disengaging themselves from the fork-like elements 72 with the handling shafts 74 engaging and locking themselves in the hooks 93 which are brought to the position Z.

As shown on figure 38H, the whole of the supporting plate 45 and girder 43 is brought back to the horizontal position by the motor-reducing gear set 51 and the motor 107 is energized for lowering the hooks 93 hence for laying the spanning beam 2 down over the breach B. The various steps depicted on figures 37-O and 37P are carried out in order that the vehicle passes over the breach B and may then take up the spanning beam according to the different steps considered when starting from

This Sheet Has Been Replaced



33 1 45 62 04 23

- 32 -

figure 38H and proceeding to figure 38A.

The liftable jibs 8 of the spanning beam 2 are of course initially locked before the start of the steps of depositing thereof.

The steps of assembling and of depositing two spanning beams coupled end to end are obviously resulting from the steps depicted on figures 37A to 37P and need therefore not to be described in detail.

The system according to the invention described hereinabove is of a relatively simple construction and operation in comparison with the systems known until now and especially would deposit one or several assembled spanning beams in a minimum time.

This Sheet Has Been Replaced





Claims

1. A spanning beam structure adapted in particular to the clearing of breaches by vehicles such as armoured vehicles of the Engineer Corps, formed of at least one spanning beam element (2a, 3a, 4a ; 2b, 3b, 4b) comprising a rigid central box (7) with an upper trackway and two access jibs (8, 9) assembled to both ends, respectively, of the central box (7), at least one (8) of the access jibs (8, 9) being raisable and fastened to the central (7) box by a transverse pivot pin (10) and unlockable locking means, characterized in that the locking means comprise at least one locking shaft (11, 12) made fast to the liftable access jib (8) and to the central box (7), respectively, while extending longitudinally of the central box (7) along the same axis in the locked position of the access jib (8) and two jaw-like members (13) gripping round two confronting heads (15, 16) of both locking shafts (11, 12).

2. A spanning beam structure according to claim 1, characterized in that the pivot pin (10) of said access jib (8) is located at the upper part of the central box (7) and the locking shafts (11, 12) are approximately located at the bottoms of the access jibs (8) and of the central box (7) with both jaw-like members (13) accommodated in a lower transverse space (7) defined between the access jib (8) and the central box (7).

3. A spanning beam structure according to claim 2, characterized in that it comprises at least one retractable pin (18) for taking up shearing forces exerted upon the locking shafts (11, 12) during the passage of vehicles on said trackway and extending longitudinally into two coaxial holes (19, 20) of the raisable access jib (8) and of the central box (7), respectively.

4. A spanning beam structure according to claim 3, characterized in that the said pin (18) is retracted



This Sheet Has Been Replaced

34



from the hole (19) of the access jib (8) by a control rod (24) having a threaded end screwed into the pin (18) and mounted for rotation about its axis into a block (21) made fast to the central box (7) so as to fully retract the pin (18) into the hole (20) of the central box formed in the block (21) in coaxial relation to the control rod (24) upon the unlocking of the raisable jib.

5. A spanning beam structure according to claim 4, characterized in that the both jaw-like members (13) are operated by a mechanism mechanically connected to the control rod (24) and comprising a plate (28) with a guided longitudinal motion controlled by the control rod (24) and two studs (33) made fast to both jaw-like members (13), respectively, inserted into two oblique grooves (32), respectively, of the plate (28) so that the movement controlled by the latter is moving both jaw-like members (13) towards or away from each other.

6. A spanning beam structure according to claim 5, characterized in that the control rod (24) comprises a transverse pin (30) made fast to the plate (28) through a longitudinal groove (31) formed in a wall of said block (21) and the plate (28) is made fast to the block (21) preferably by two L-shaped parallel guide rails (29).

7. A spanning beam structure according to any one of the foregoing claims characterized in that it comprises at least one shaft (34) for guiding the displacement moving both jaw-like members (13) away from or towards each other and made fast to said central box (7).

8. A spanning beam structure according to any one of the foregoing claims characterized in that it comprises a reducing mechanism (24, 27) mechanically connected to the control means of the jaw-like members (13) and made fast to the bottom of the central box (7) so as to be removably coupled to an external drive motor.

9. A spanning beam structure according to any one of the foregoing claims characterized in that the other access jib (9) is stationary and comprises a transverse



33 1 45 62 04 23

35

This Sheet Has Been Replaced



bar (35) for locking one hook-shaped portion (36) at the end of a movable jib (8) unlocked from another similar spanning beam element, a member (39) for unlocking the hook-shaped portion (36) of the transverse bar (35) and consisting preferably of a jack made fast to the stationary access jib (9) and the jack rod of which is lifting the movable access jib (8) of the other spanning beam element, and at least one locking shaft (38) extending longitudinally of the central box (7) and capable of being locked by two jaw-like members (13) to the locking shaft (12) of the central box (7) of the other spanning beam element when the movable access jib (8) of the latter is locked to the transverse bar (35).

10. A spanning beam structure according to claims 1 to 9, characterized in that it comprises two spanning beam elements with parallel trackways and the central boxes (7) of which are connected to each other by two connecting arms (2c; 3c; 4c) forming braces whereas two access jibs forward or rearward of the structure are stationary (9) and raisable (8), respectively.

11. A system for transferring onto a road vehicle such as a truck at least two bridging spanning beams (2, 3, 4) superimposed on a frame (5) of the vehicle and capable of being assembled end to end and for depositing each one of the spanning beams or both spanning beams assembled end to end over a breach to be cleared, each spanning beam having such a structure as defined in claims 1 to 10 and of the type comprising a girder for supporting and launching (43) a spanning beam or assembled spanning beams displaceable in relation to the vehicle (1) towards an overhang position forward of the latter, means for displacing the spanning beam or assembled spanning beams in relation to the girder (43) to an overhang position forward of the girder (43) and a plate (45) supporting in guided relationship the supporting and launching girder (43) and tilting in relation to the vehicle (1) to allow the depositing of the spanning beam or assembled spanning beams,



* C L M S *

33 1 45 62 04 23

This Sheet Has Been Replaced



36

characterized in that the improvement consists in that it comprises at least one operated hook (93) for depositing the spanning beam or assembled spanning beams, mounted at the end of the supporting and launching girder (43) and capable of assuming a relative position for supporting one handling shaft (74) of the spanning beam or assembled spanning beams located opposite to the end of the spanning beam or assembled spanning beams bearing upon that bank of the breach to be cleared which is opposite to the vehicle, by tilting of the supporting plate (45), from which supporting position the hook (93) is moved downwards for depositing the other end of the spanning beam or assembled spanning beams upon that bank of the breach which is near the vehicle (1).

12. A system according to claim 11, characterized in that the overhang position of the supporting and launching girder (43) forward of the vehicle (1) upon the depositing of the spanning beam or assembled spanning beams is relatively reduced by about one quarter of its full length.

13. A system according to claim 11 or 12, characterized in that means for displacing the spanning beam or assembled spanning beams in relation to said girder (43) comprise two endless drive chains (64) arranged on either side of the girder (43) and each one mounted on two toothed wheels (65) fastened to the ends of the girder (43) with the lower side (64a) of each drive chain (64) passing on three toothed guide wheels arranged in a triangular configuration (66) and made fast to said supporting plate (45) ; a motor-reducing gear set (71) for simultaneously driving two of the guide pinions (66) of both drive chains (64), respectively, and fastened to the supporting plate (45) ; and at least two pairs of retractable fork-like elements (72) fastened to both drive chains, (64) respectively, in symmetrical relation to the longitudinal axis of the girder (43), each pair of fork-




* C L M S *

33 1 45 62 04 23

37

This Sheet Has Been Replaced



like elements (72) gripping one corresponding projecting portion (73) of the central box (7) of one spanning beam located plumb with a handling shaft underneath the latter.

14. A system according to claim 11, characterized in that the fork-like elements (72) are simultaneously brought into the position of gripping said projecting portion (73) or into the retracted position by a mechanical mechanism operated by a control device fastened to said supporting and tilting plate (45).

15. A system according to claim 14, characterized in that each pair of fork-like elements (72) comprise two brackets (72) mounted opposite to each other in pivotal relationship onto two parallel pins (75, 77), respectively, of links of one drive chain (64) and said mechanism comprises two transverse shafts (79) mounted for rotation within said girder (43), rotated together by two toothed wheels meshing (80) with each other and made fast with both transverse shafts (79), respectively, each one supporting at their ends to outer cams (81) pushing two arms (82), respectively, pivotally mounted on the girder (43) below the upper sides (64b) of both drive chains (64) so as to lift the corresponding brackets (72) to a position projecting above the plane passing through the upper sides (64b) of both drive chains (64) and a plate (84) pivotally mounted on one single side of the girder (43) and having one of its ends pivotally connected to a control rod (86) and its opposite end comprising a notch in which is pivotally inserted the end of one pivoting arm (83) of one of the thrust cams (81), the pivoting plate (84) being thus capable of tilting between an operative position locking the brackets (72) in their gripping position and an inoperative retracted position of the brackets (72).

16. A system according to claim 14 or 15, characterized in that the control device comprises an element such as a plate (90) perpendicular to the




* C L M S *

33 1 45 62 04 23

38

This Sheet Has Been Replaced



supporting plate (45) and vertically movable between a lower position and an upper position and acting in the stationary position of the girder (43) in relation to the supporting plate (45) upon a roller (87) made fast to the end of one arm pivoting (88) in relation to the girder (43) and forming with the control rod (86) and the pivoting plate formed with a notch (84) a parallelogram deformable between both aforesaid tilting positions of the pivoting plate (84).

17. A system according to one of claims 11 to 16, characterized in that the said supporting and tilting plate (45) is located forward of the vehicle and said girder (43) has its portion rearwards of the supporting and tilting plate (45), in the rest or inoperative position of the girder (43), accommodated between two superimposed spanning beams and the connecting arms (2c, 3c) of both spanning beams (2, 3) with both connecting arms of the lower spanning beam (3) having each one a U-shaped configuration pivoted with its ends to both inner side walls, respectively, of both central boxes (7) of both spanning beam elements and capable of being raised simultaneously to a position substantially parallel to the frame (5) of the vehicle, wherein they may be locked to their lower spanning beam (3), both U-shaped (3c) connecting arms thus increasing in the lowered position the room for housing the beam (43).

18. A system according to claim 17, characterized in that it comprises means for raising (124) the connecting arms (3c) of the elements of the lower spanning beam, consisting of a lifting table mounted on the frame (5) of the vehicle so as to assume a lowered inoperative position and capable of being lifted from its inoperative position after withdrawal of the girder from above the lower spanning beam (3) so as to act upon the lower ends of the U-shaped connecting arms (3c) and to move them away from each other until they reach their position of locking to the lower spanning beam (3).



* C L M S *

33 1 45 62 04 23

This Sheet Has Been Replaced

39



19. A system according to claim 11, characterized in that it comprises two hooks for supporting (93) two handling shafts (74), respectively, made fast in confronting relationship to two spanning beam elements, respectively, whereas both hooks (93) are fastened to the ends of two drive chains (94) mounted onto parallel toothed wheels (95), respectively, at the end of the girder (43) and driven by a reducing mechanism (100) fastened to the girder (43) and operated by a preferably hydraulic motor (107) fastened to the supporting and tilting plate (45) and coupled through a removable connection to the reducing mechanism (100) at determined fixed positions (a, b, c) of the girder (43) in relation to the supporting and tilting plate (45).

20. A system according to claim 19, characterized in that each aforesaid hook (93) comprises a latch (93a) for locking one handling shaft and arranged to co-operate with the upper edge of the corresponding side wall (43b) of the girder (43) upon a controlled displacement of the hook (93) in the direction reverse from that of downward motion of the hook (93) so as to be unlocked by the action of an elastic member (123) in a relative position of the hook (93) receiving the corresponding handling shaft (74) whereas the hook (93) is then displaced over a relatively small stroke simultaneously with the spanning beam in the lowering direction of the hook so as to automatically bring the latch (93a) into the position of locking of the handling shaft (74) within the hook (93).

21. A system according to claim 20, characterized in that the latch (93a) of each hook (93) is unlocked by the action of said elastic member (123) in said hook-supporting position (93).

22. A system according to one of claims 11 to 21, characterized in that the girder (43) is displaced in translatable motion in the longitudinal direction in relation to the supporting and tilting plate (45) by a motor-reducing gear set (47) fastened underneath the



* C L M S *

33 1 45 62 04 23

40

This Sheet Has Been Replaced



said plate (45) and driving at least one drive pinion (48) meshing with a longitudinal toothed rack (49) fastened below the girder (43), which comprises at the upper portion trackways forming rails for guiding the spanning beams (2, 3, 4) upon which are moving rollers for the travel (42) of the spanning beams (2, 3, 4).

23. A system according to one of claims 11 to 22, characterized in that it comprises a device for controlling the tilting of the supporting plate (45), comprising two side cables (57) passing over two pulleys (59), respectively, made fast to the supporting plate (45) rearwards of the tilting shaft of said plate (45) while defining two sides (57c) substantially perpendicular to the frame (5), anchored to the latter and two parallel sides (57a) extending along the frame (5) and winding up onto two drums (56), respectively, of a winch driven by a motor-reducing gear set (51) made fast to the frame (5) rearwards of the vehicle (1).

24. A system according to claim 23, characterized in that both perpendicular sides (57c) have their ends connected to a swinging member (61) shaped as a bar parallel to the frame (5) and pivotally mounted about a longitudinal central shaft made fast to a yoke (62) fastened to the frame (5) whereas the parallel sides (57a) are extending back to the pulleys for tilting (59) the supporting plate (45) through the medium of guide pulleys (58).

25. A system according to one of claims 11 to 24, characterized in that it comprises two pairs of jacks (133) arranged on either side of the vehicle (1) so as to lift the lower spanning beam (3) after disengagement of the upper spanning beam (2) on said girder (43) at the level of the upper spanning beam (2) with a view to couple it to the latter.

26. A system according to one of claims 11 to 25, characterized in that each spanning beam (2, 3, 4) comprises two pairs of front and rear handling shafts



* C L M S *

33 1 45 62 04 23

This Sheet Has Been Replaced



41

(74), respectively, two handling shafts (74) of each pair being fastened in confronting relationship to both central boxes (7), respectively, of two spanning beam elements at the upper portion thereof.

27. A system according to one of claims 11 to 26 characterized in that it comprises a preferably hydraulic motor fastened to the supporting and tilting plate (45) and adapted to be mechanically coupled removably to a reducing mechanism (24, 27) at the bottom of one spanning beam (2, 3, 4) at a determined position of the girder (43) - spanning beam (2, 3, 4) assembly in relation to the supporting and tilting plate (45).

28. A system according to one of claims 11 to 27, characterized in that for the assembling end to end of two spanning beams and their depositing over a breach, the lower spanning beam (2) is initially made fast to both drive chains (64) by two pairs of fork-like elements (72), the girder (43) and the upper spanning beam (2) are displaced together with respect to the supporting and tilting plate (45) by the motor-reducing gear set (47) until reaching a relative position of most overhang forward of the vehicle (1) in which the spanning beam (2) is displaced in relation to the girder (43) towards the front of the vehicle by both drive chains (64) until both handling shafts (74) are engaging both hooks (93), respectively, in the unlocked position of their respective latches (93a), both hooks (93) are then operated by their drive chain (64) to assume the relative position of locking by the latch (93a) of both handling shafts (74) of the upper spanning beam (2), both pairs of fork-like elements (72) are unlocked from the upper spanning beam (2) and the lifting table (124) is actuated for raising the connecting arms (3c) of the lower spanning beam (3) and for locking them to the latter whereas both pairs of side jacks (133) are lifting the lower spanning beam (3) and for locking them to the latter whereas both pairs of side jacks are lifting the lower spanning beam to the same level as the



* C L M S *

33 1 45 62 04 23

42

This Sheet Has Been Replaced



upper spanning beam (2), the girder (43) and the upper spanning beam (2) are displaced together backwards to a position of the girder (43) in relation to the supporting and tilting plate (45) such that both pairs of fork-like elements (72) are actuated to lock the front part of the lower spanning beam (3) to both drive chains (64) which is controlled to displace the lower spanning beam (3) in relation to the girder (43) rearwards of the upper spanning beam (2) with both raisable access jibs (8) of both lower (3) and upper (2) spanning beams, respectively, which are initially unlocked, being raised by their respective lifting jacks (39) so that the hook-shaped ends (36) of the lifted jibs (8) are locking themselves to the transverse bars (35) of both stationary jibs (9) of the upper (2) and lower (3) spanning beams, respectively, and jaw-like members (13) are operated to lock end to end the locking shafts (38) of the stationary jibs (9) to the locking shafts (12) of the central boxes (7) of the upper (2) and lower (3) spanning beams.

29. A system according to claim 28, characterized in that the girder (43) and both assembled spanning beams (2, 3) are displaced together in relation to the supporting and tilting plate (45) to the position of greatest overhang of the girder (43), in which both spanning beams are moved rearwards in relation to the girder (43) by operating both drive chains (64) and both hooks (93) are concurrently brought into the position of unlocking of the latches (93a) thereby to disengage the handling shafts (74) from the upper spanning beam (2), both assembled spanning beams (2, 3) are then displaced in relation to the girder (43) to a position in which the front handling shafts (74) of the lower spanning beam (3) are locked to both hooks (93), the drive chains (64) are operated after unlocking of the fork-like elements (72) from the front part of the lower spanning beam (3) to bring the fork-like elements (72) into the locking position rearwards of the lower spanning beam



* C L M S *

33 1 45 62 04 23

43

(3), both spanning beams (2, 3) are moved backwards with respect to the girder (43) by both drive chains (64) and both hooks (93) are operated to disengage the front handling shafts (74) of the lower spanning beam (3) from both hooks (93), the supporting plated (45) is tilted to lay the free end of the assembled spanning beams (2, 3) down onto the bank opposite to the vehicle (1), the girder (43) is brought into the rear position for depositing the spanning beams (2, 3) which are displaced in relation to the girder (43) to a position where the rear handling shafts (74) of the lower spanning beam (3) are inserted into both hooks (93) which are operated to provide for the depositing of the assembled spanning beams (2, 3) over the bank towards the vehicle (1).

This Sheet Has Been Replaced



* C L M S *

33 1 45 62 04 23

Abstract of the disclosure


A spanning beam structure for clearing breaches by vehicles, comprising locking means including at least one pair of locking shafts made fast to a raisable access jib and to a central box, respectively, of the spanning beam while extending longitudinally of the central box along the same axis in the locked position of the access jib and two jaw-like members gripping round to confronting heads of both locking shafts.

FIG. 11

This Sheet Has Been Replaced





2/22

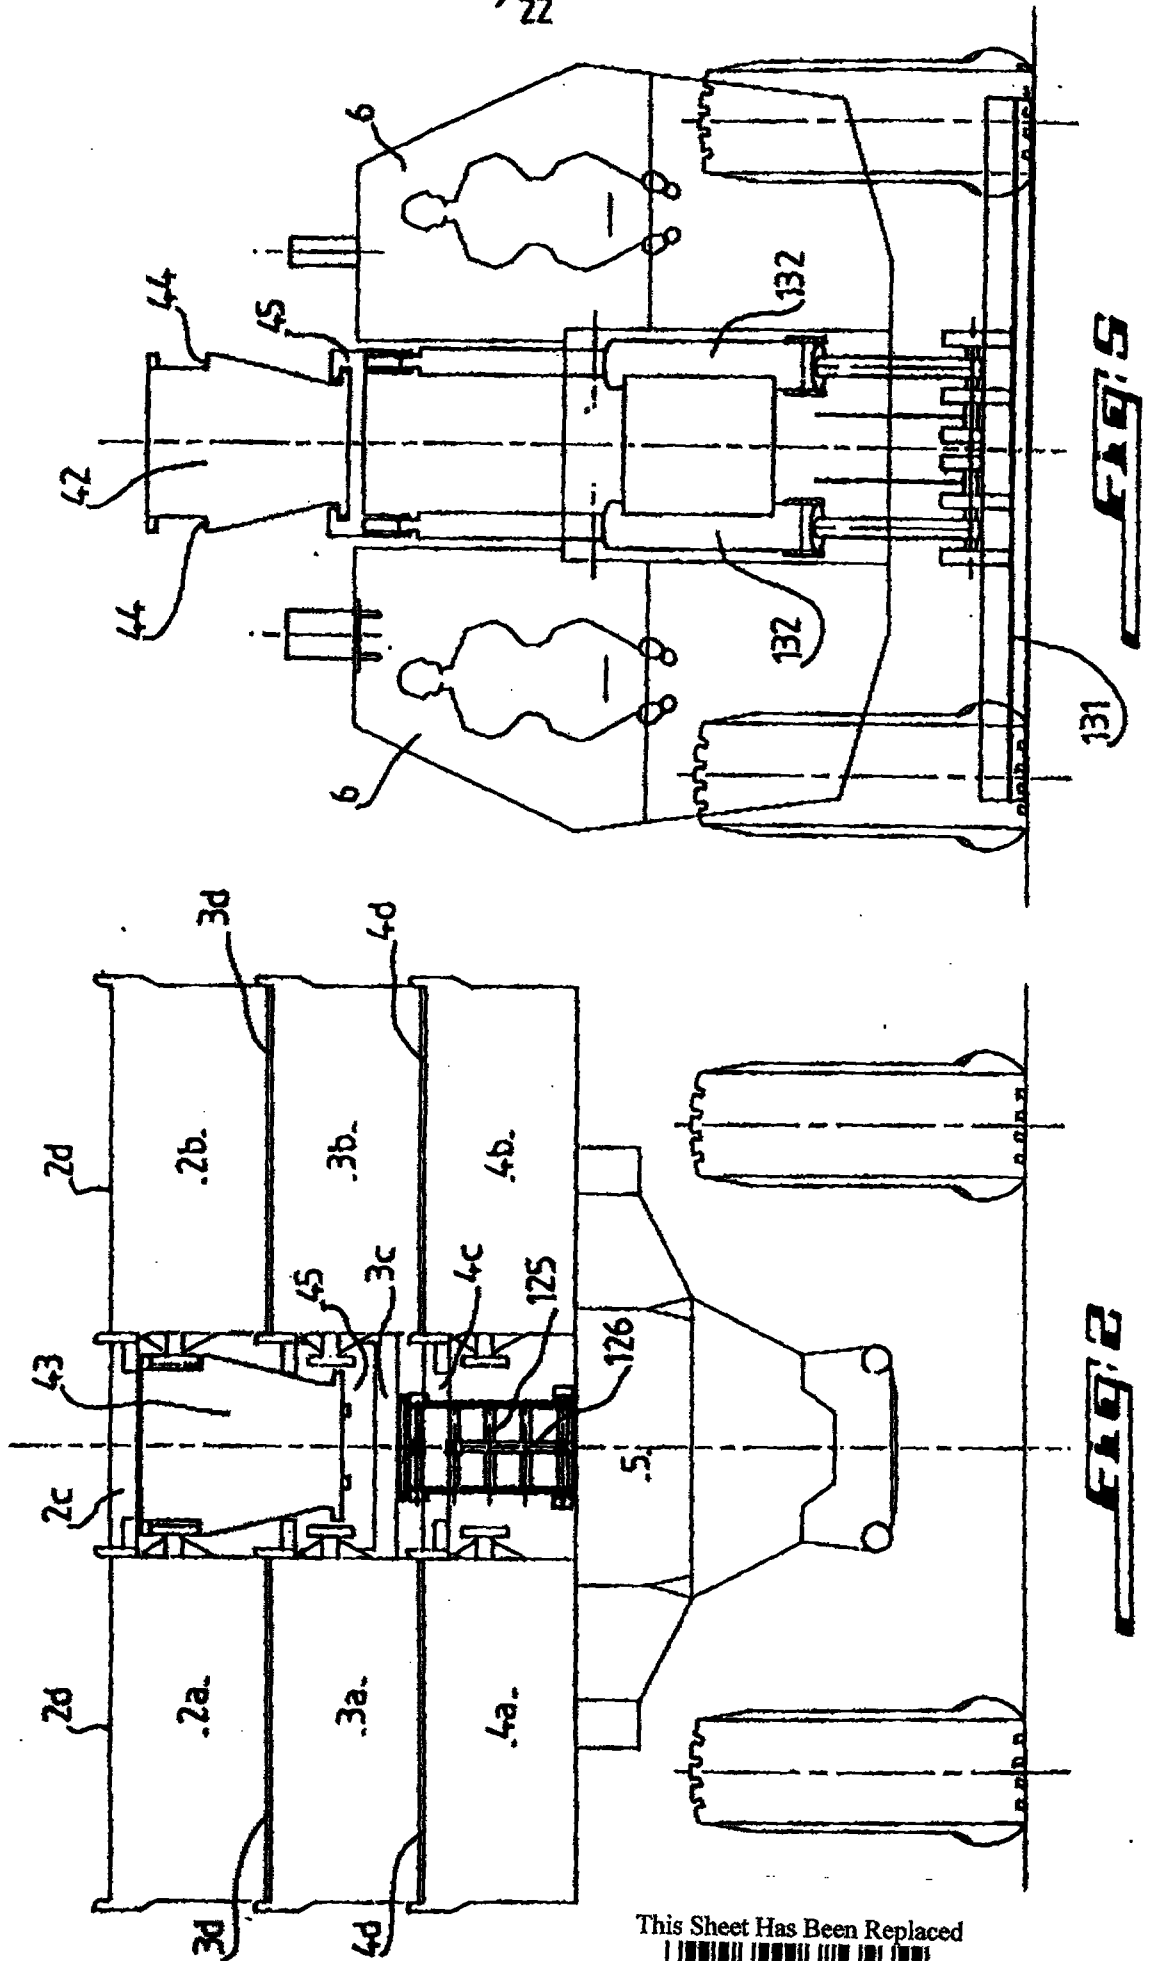

This Sheet Has Been Replaced



3/22

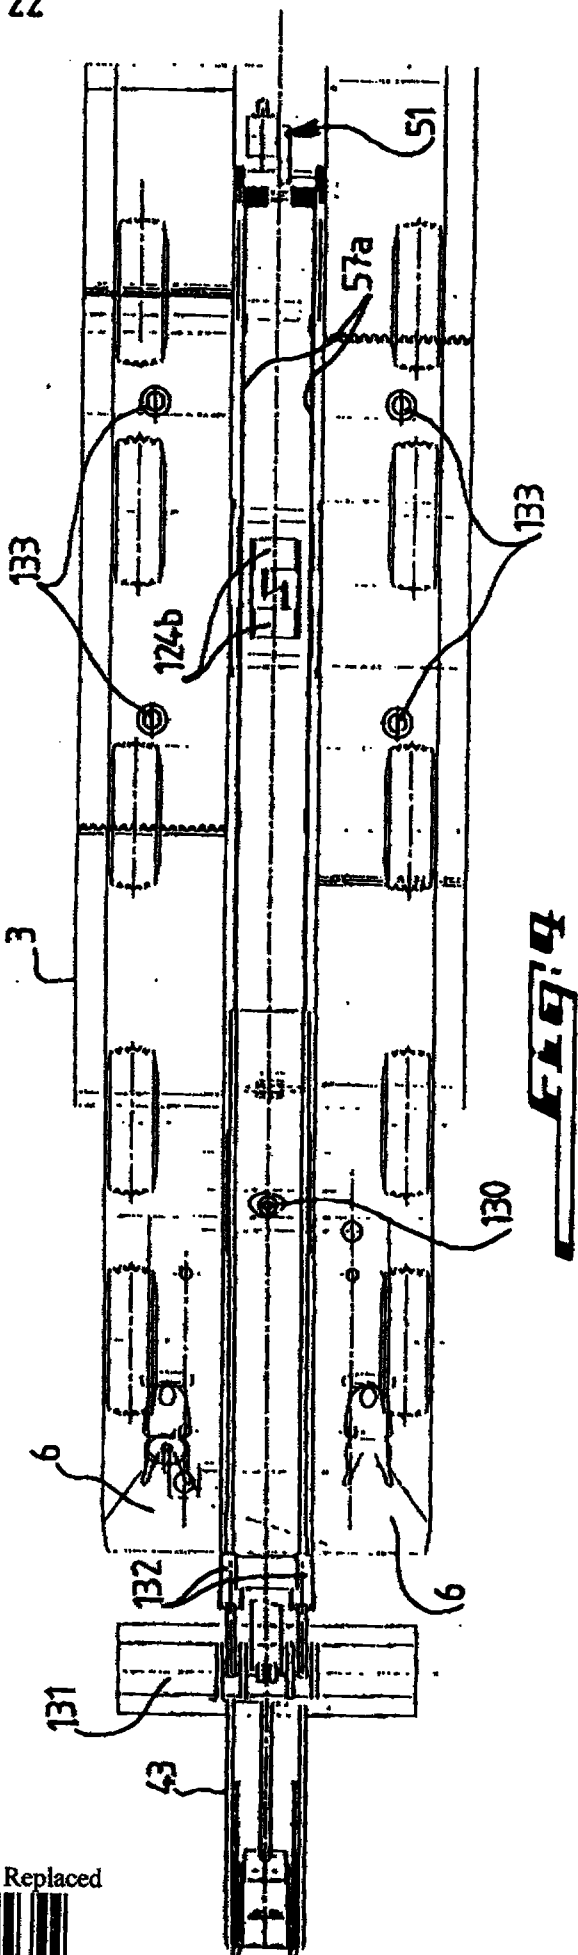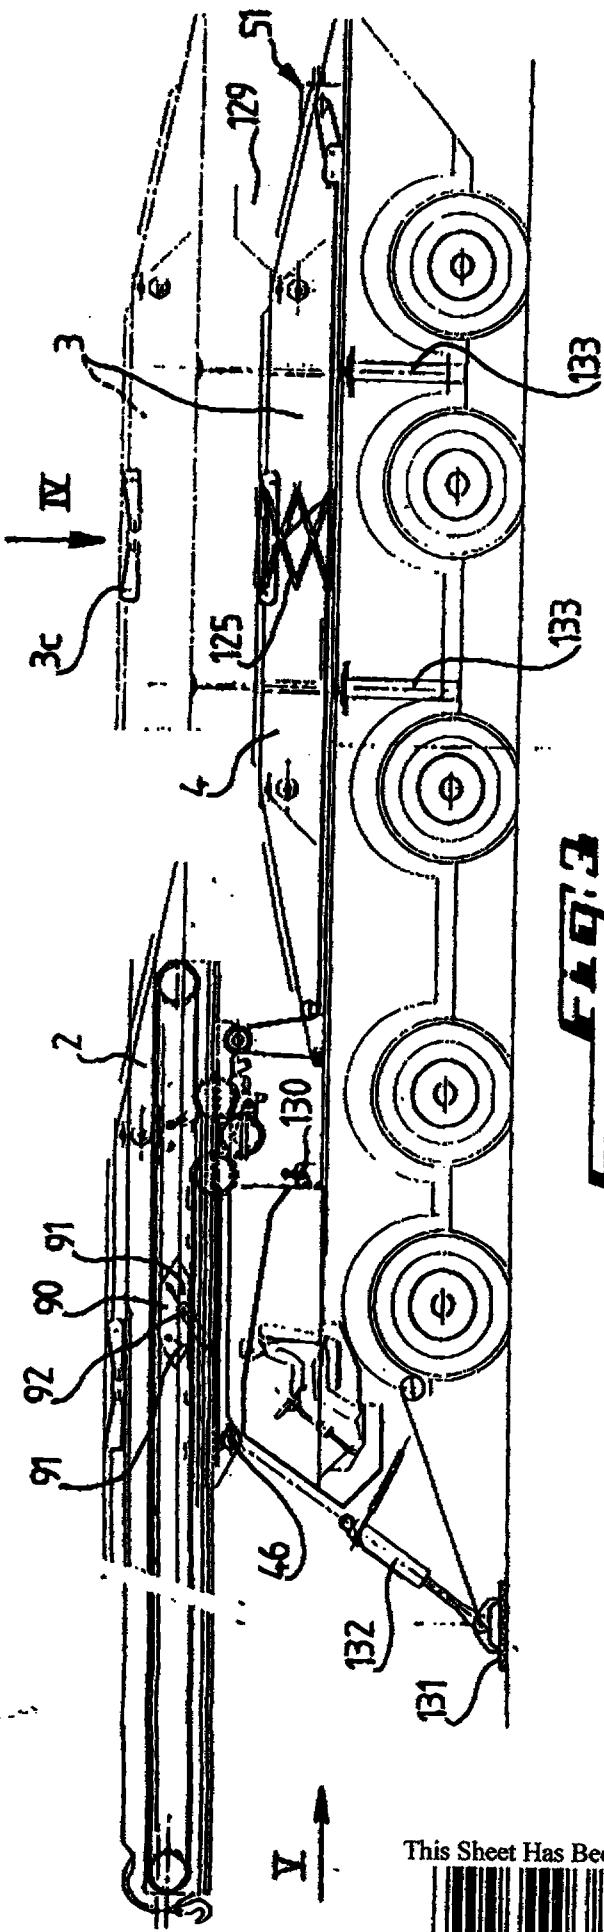


This Sheet Has Been Replaced




33 1 45 62 04 23

4/22

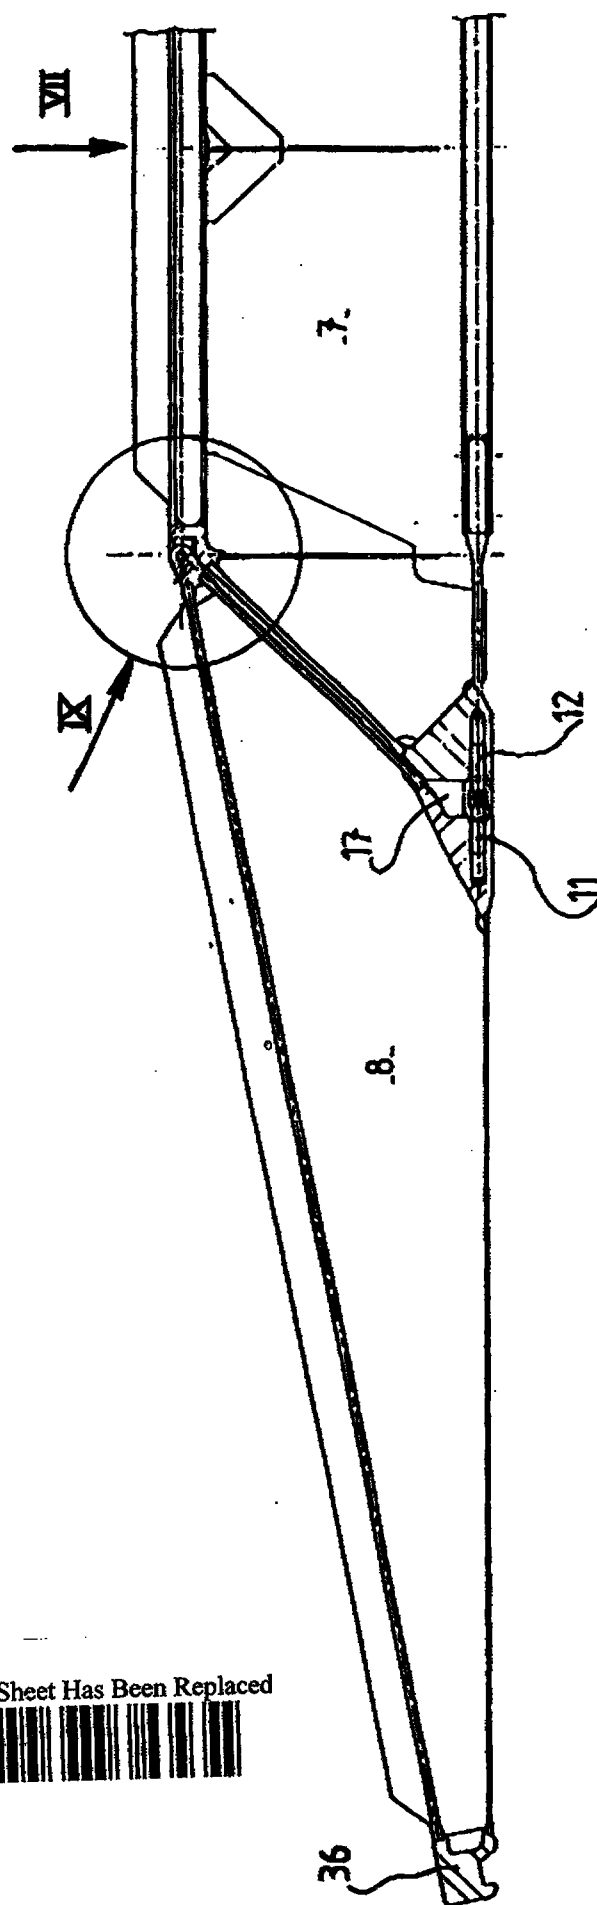

FABRIK

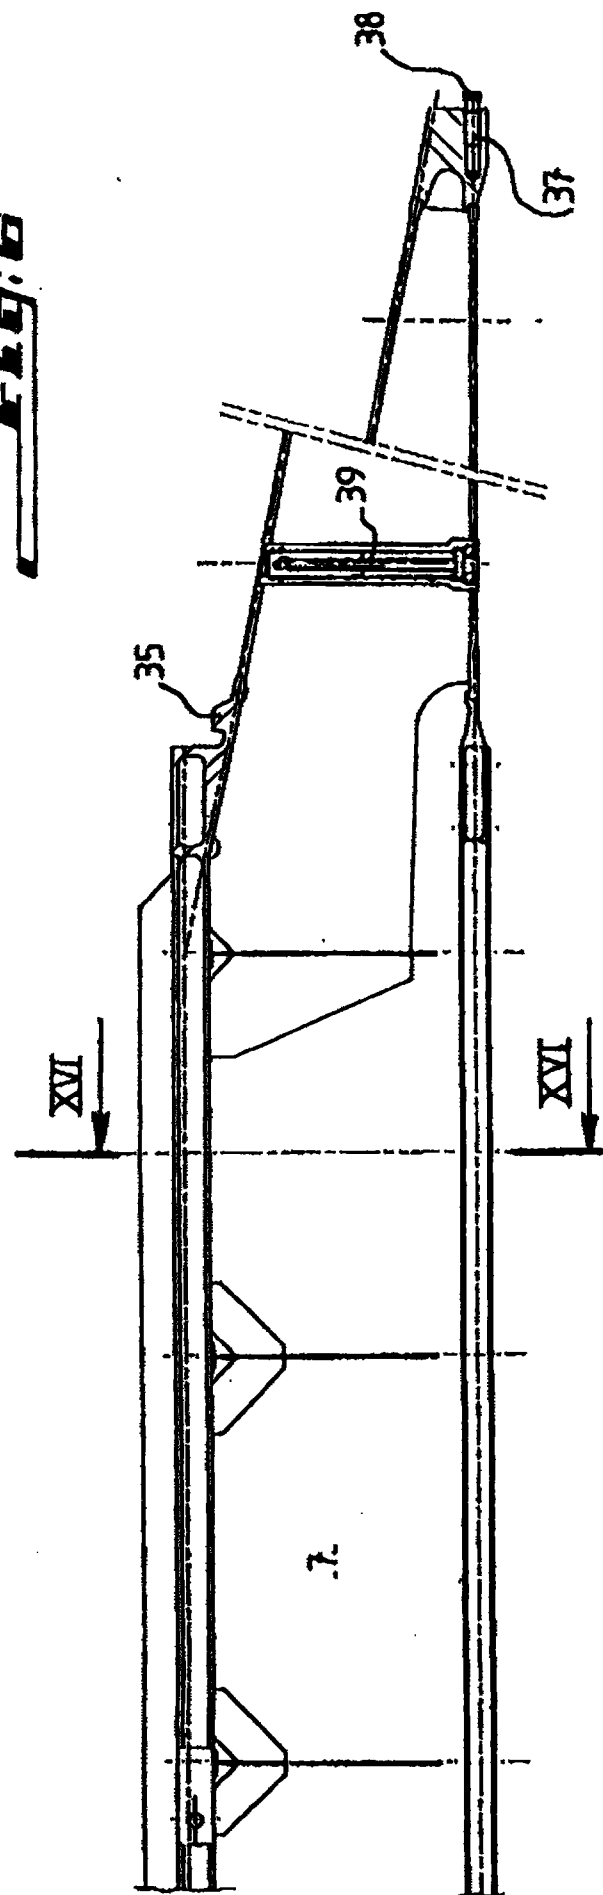

This Sheet Has Been Replaced



33 1 45 62 04 23

This Sheet Has Been Replaced



5/22

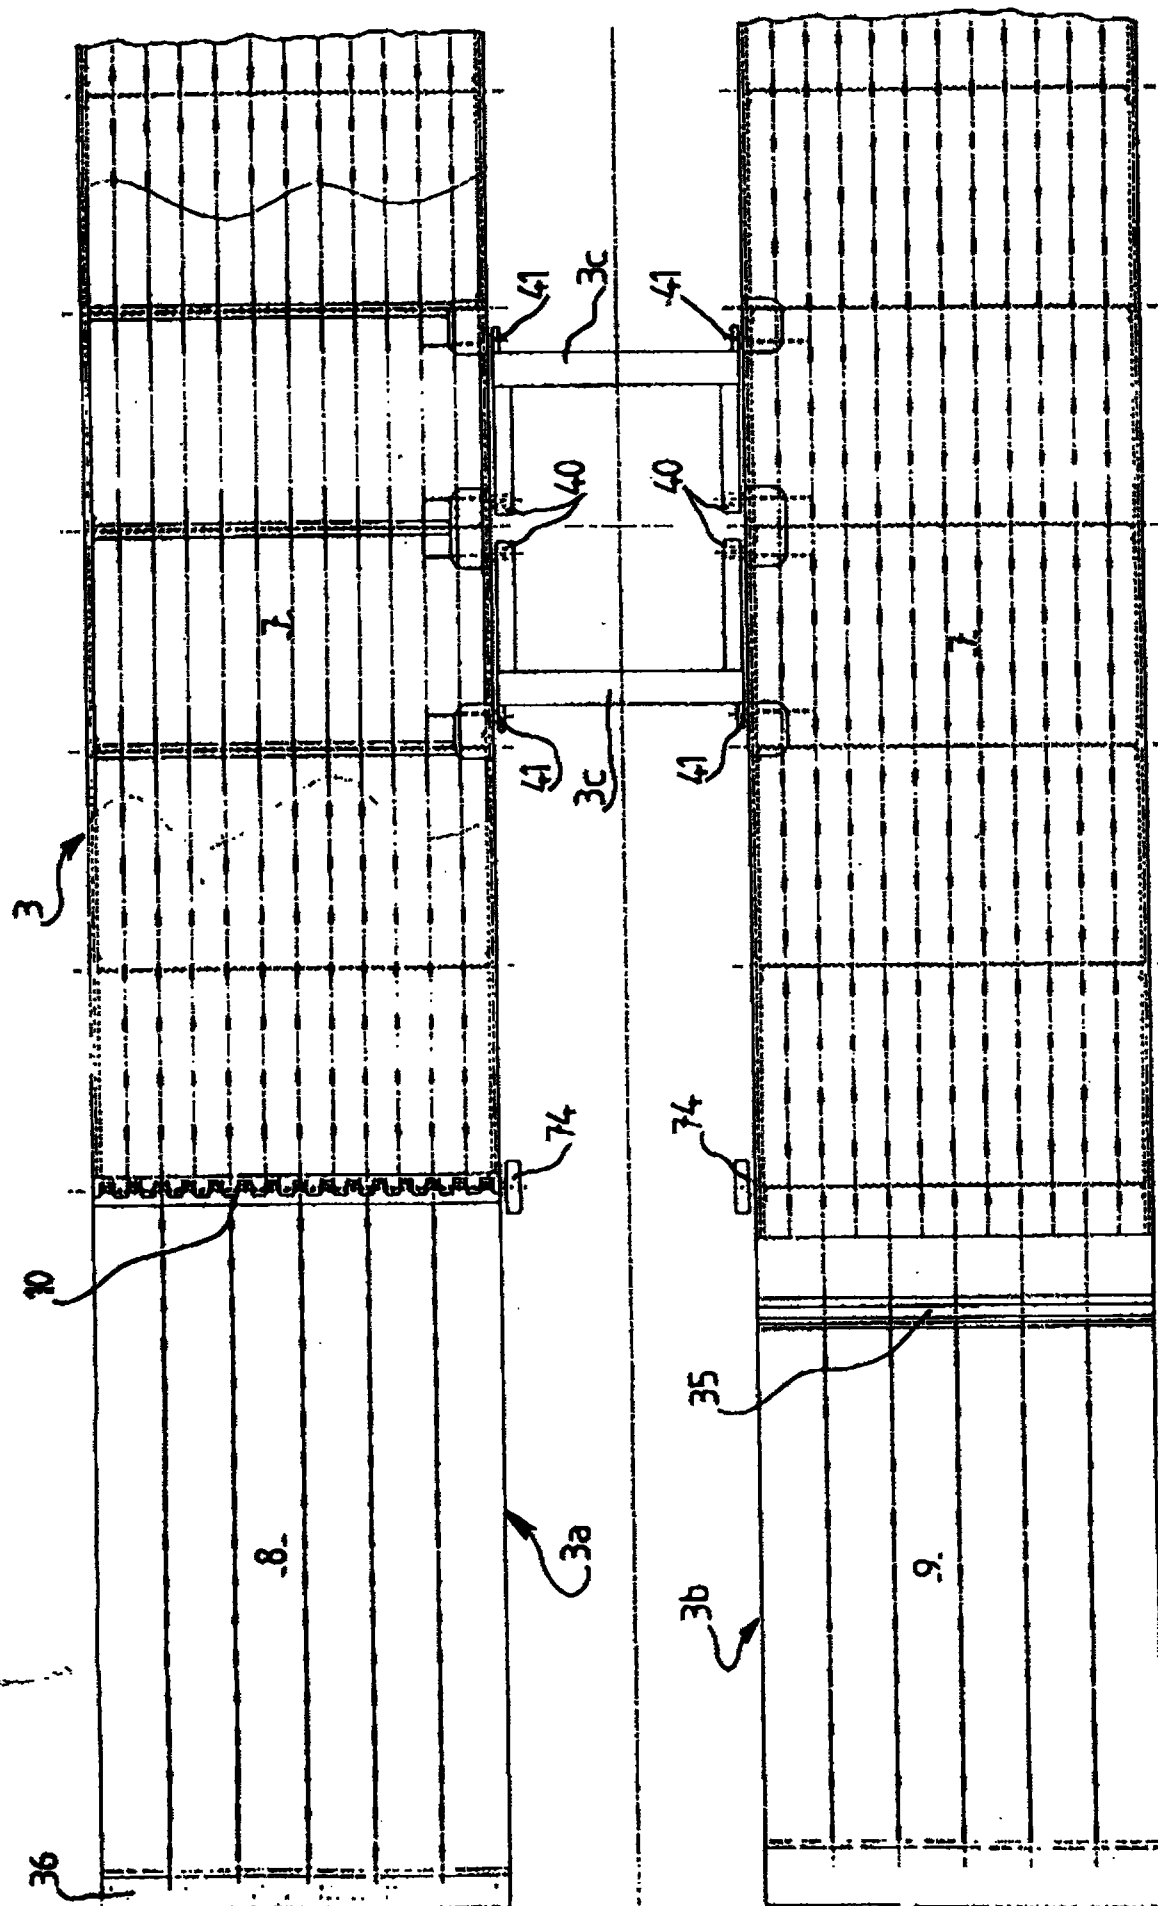


Fig. 7

This Sheet Has Been Replaced

33 1 45 62 04 23



6/22

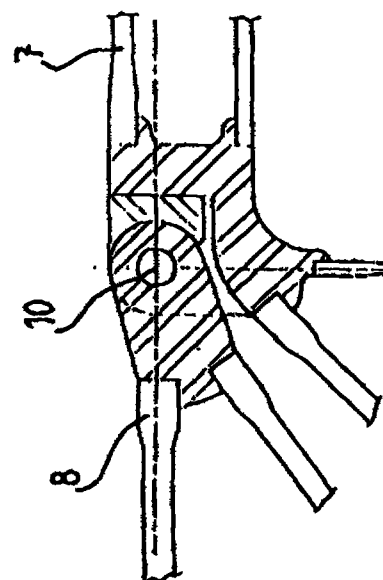
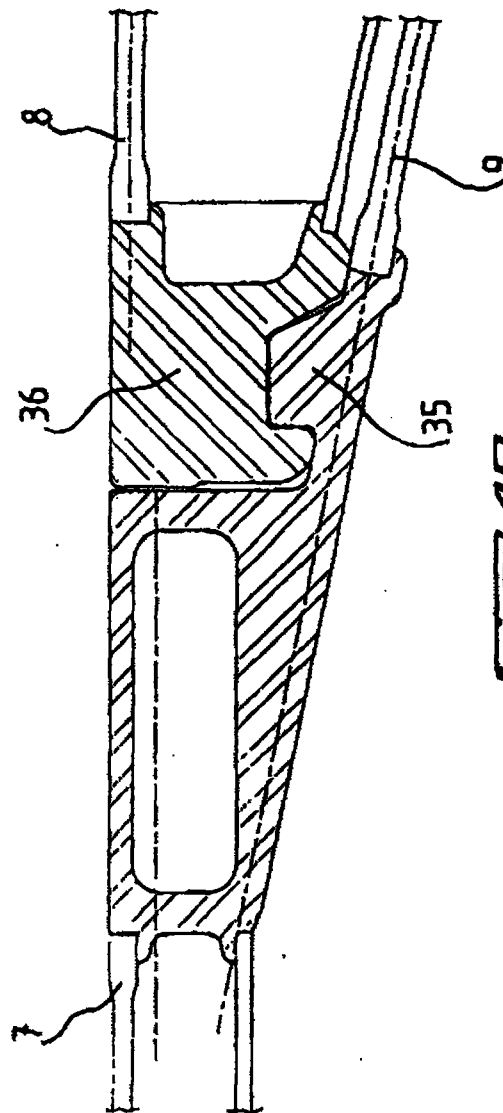
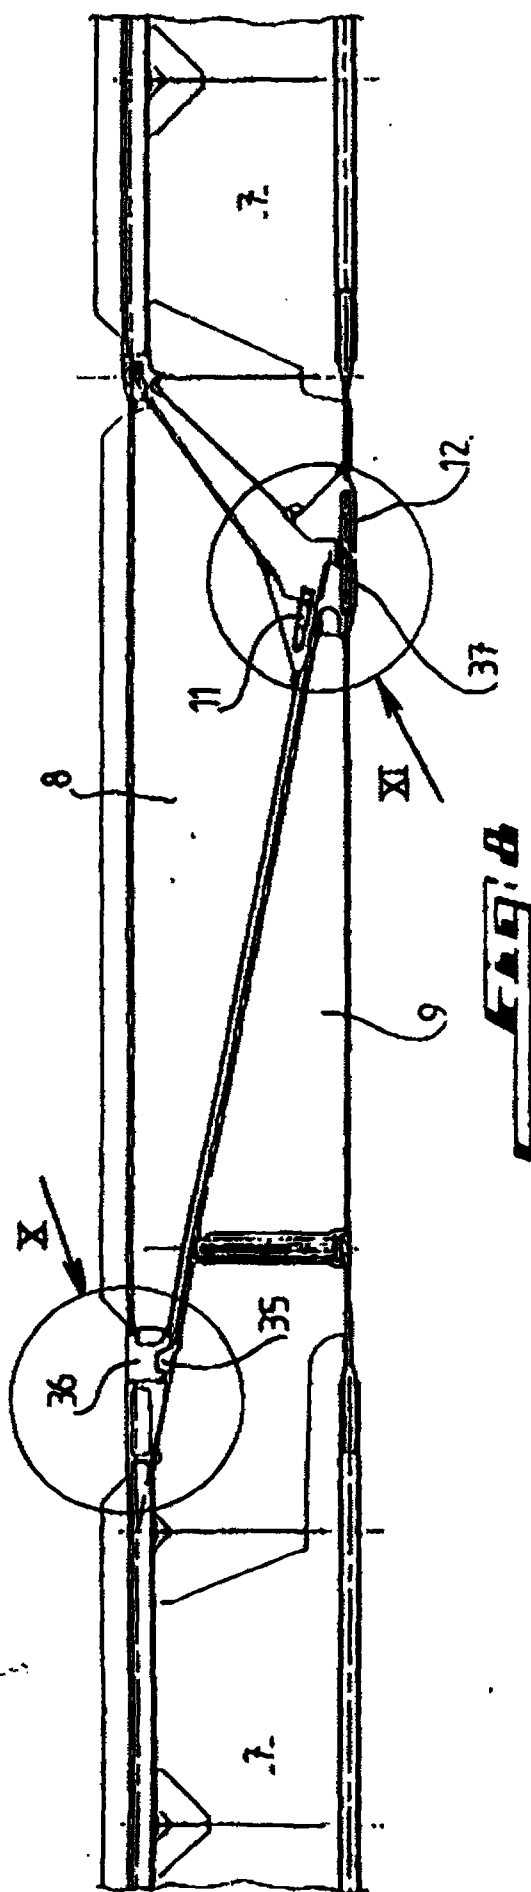


Fig. 10

Fig. 9

33 1 45 62 04 23

7/22

FIG. 11

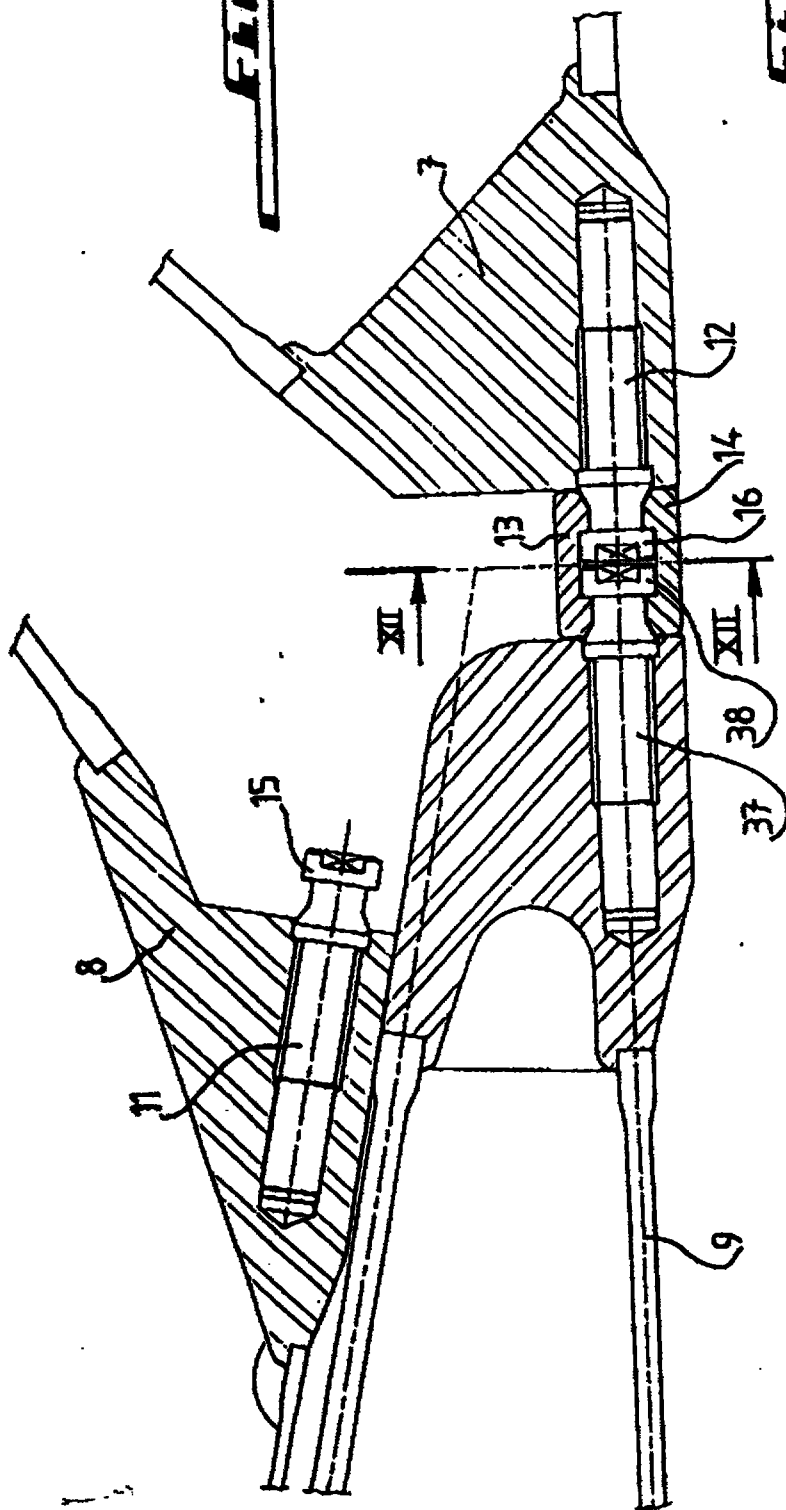


FIG. 12



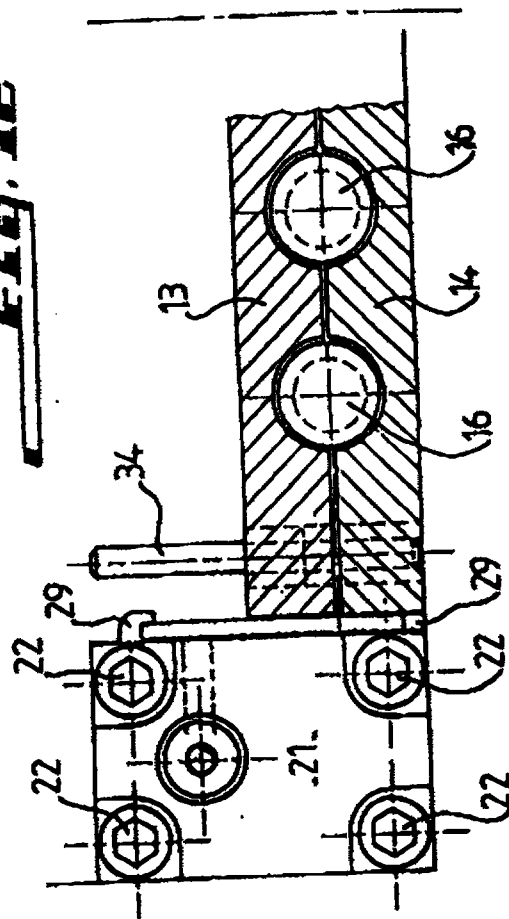


FIG. 13

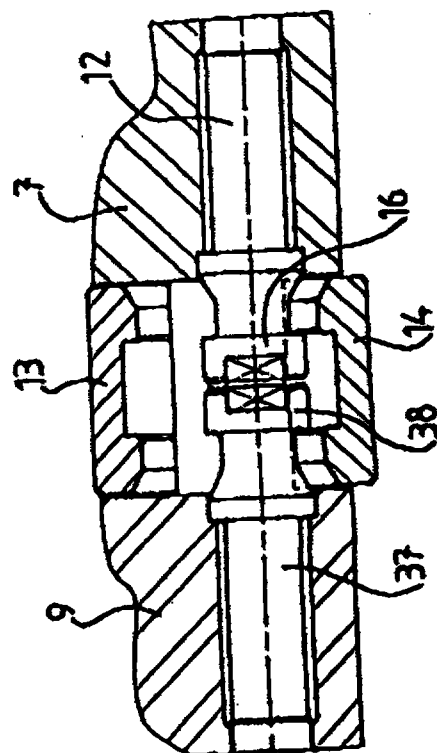


This Sheet Has Been Replaced



33 1 45 62 04 23

8/22

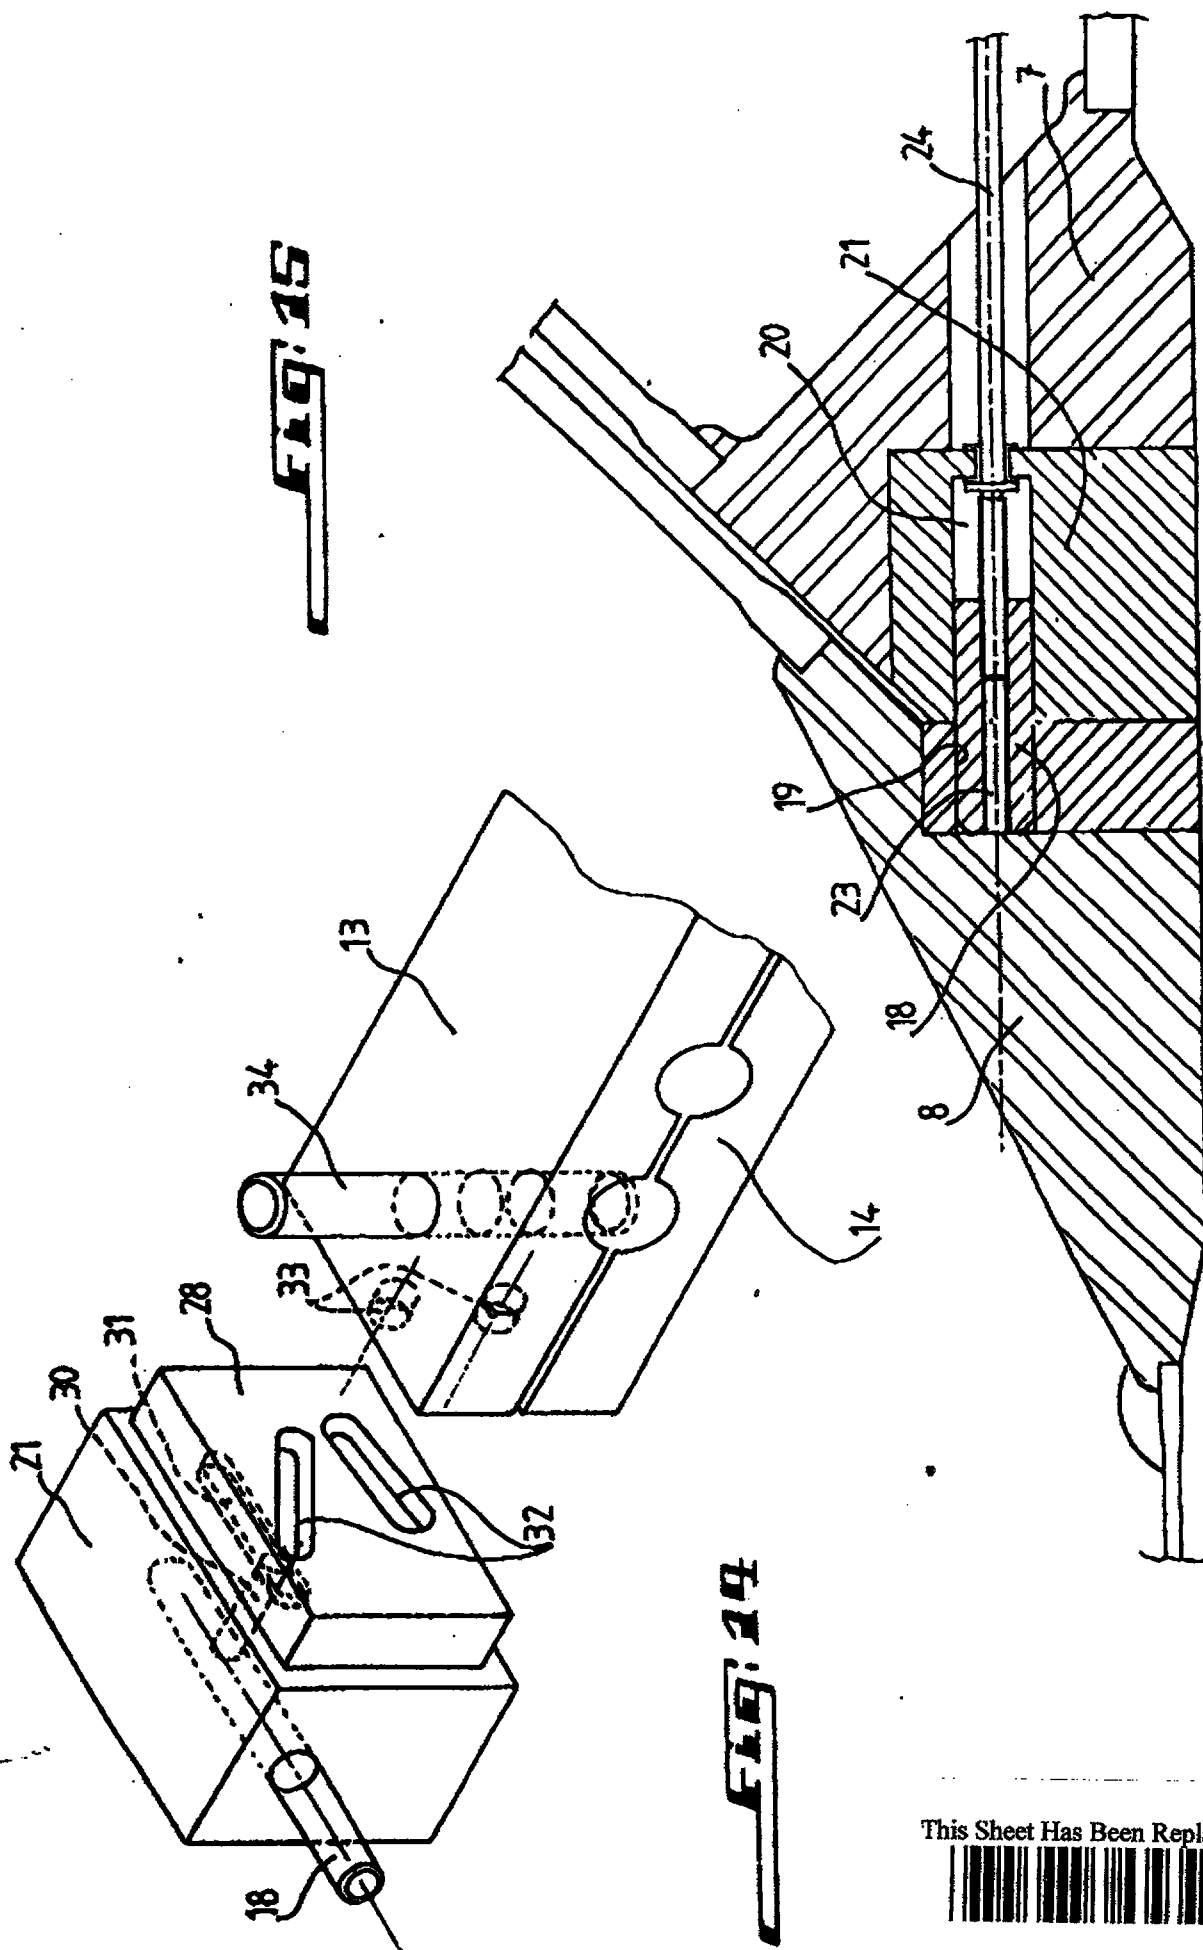

This Sheet Has Been Replaced



33 1 45 62 04 23

9/22

FIG. 16


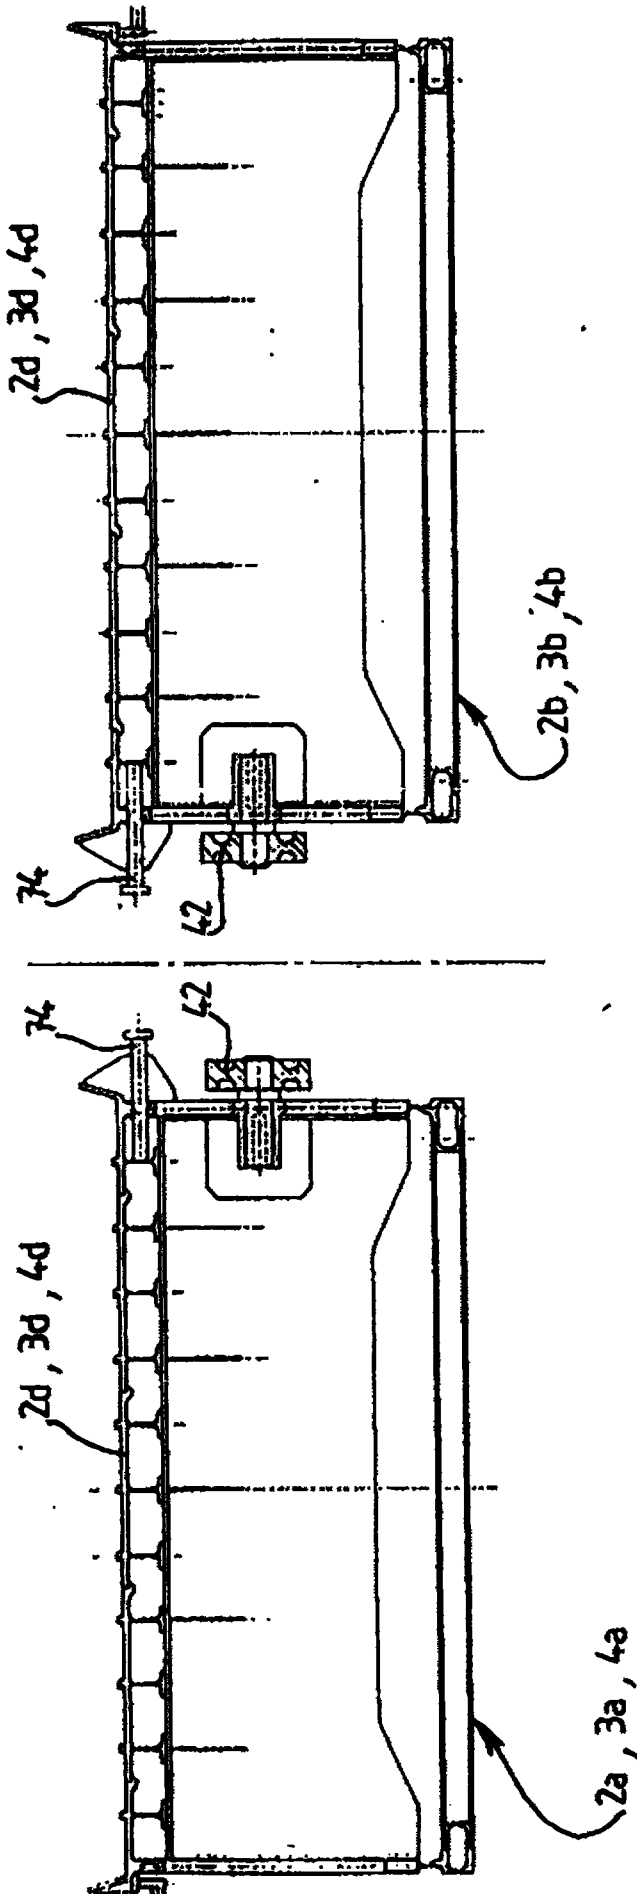


FIG. 17



This Sheet Has Been Replaced

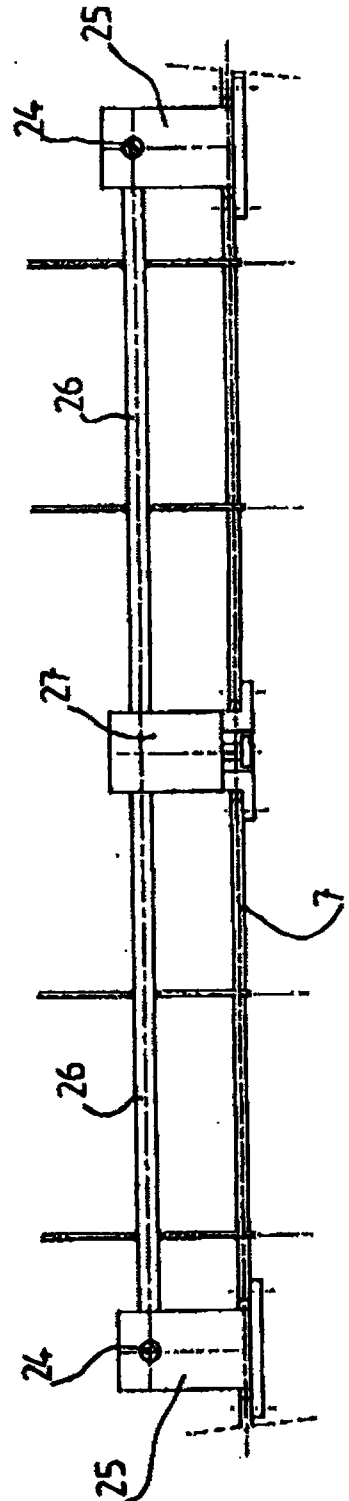

33 1 45 62 04 23

10/22

This Sheet Has Been Replaced

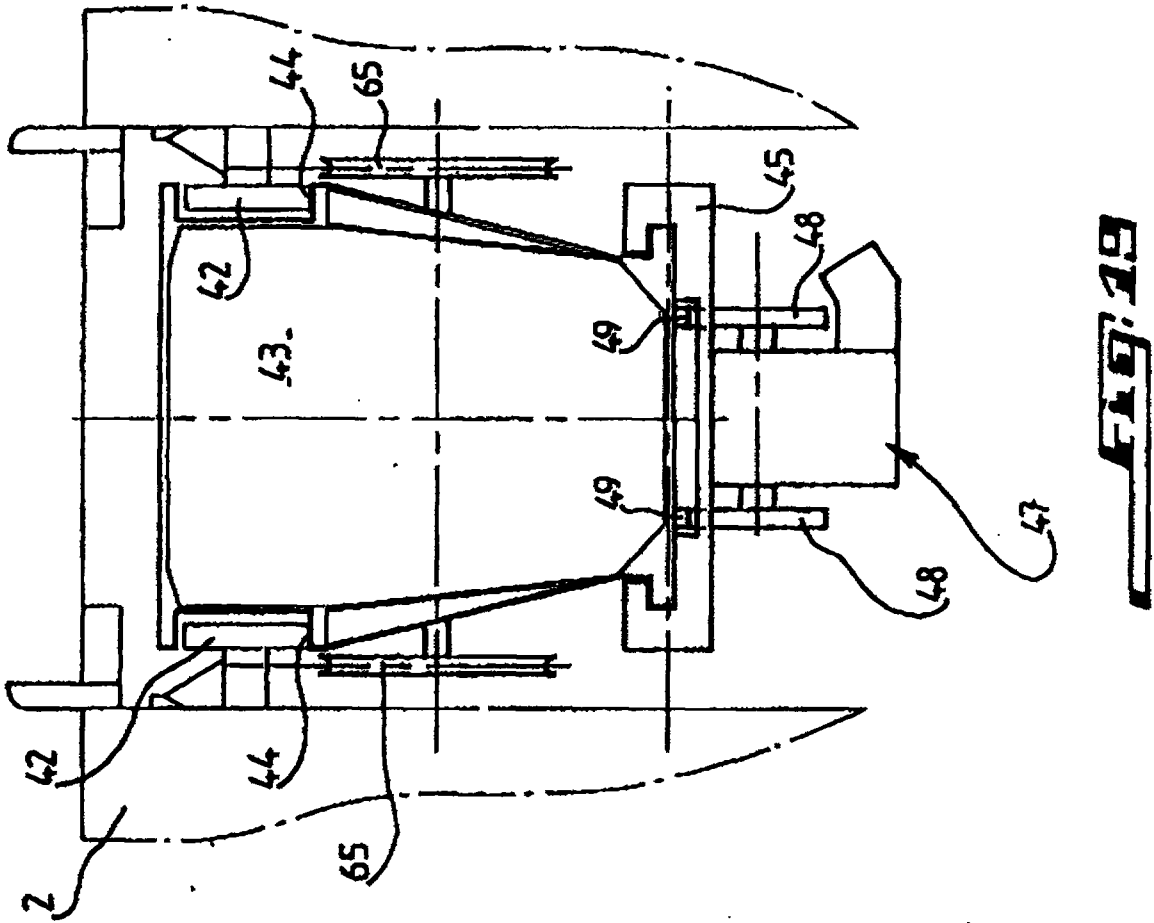


FIG. 1B


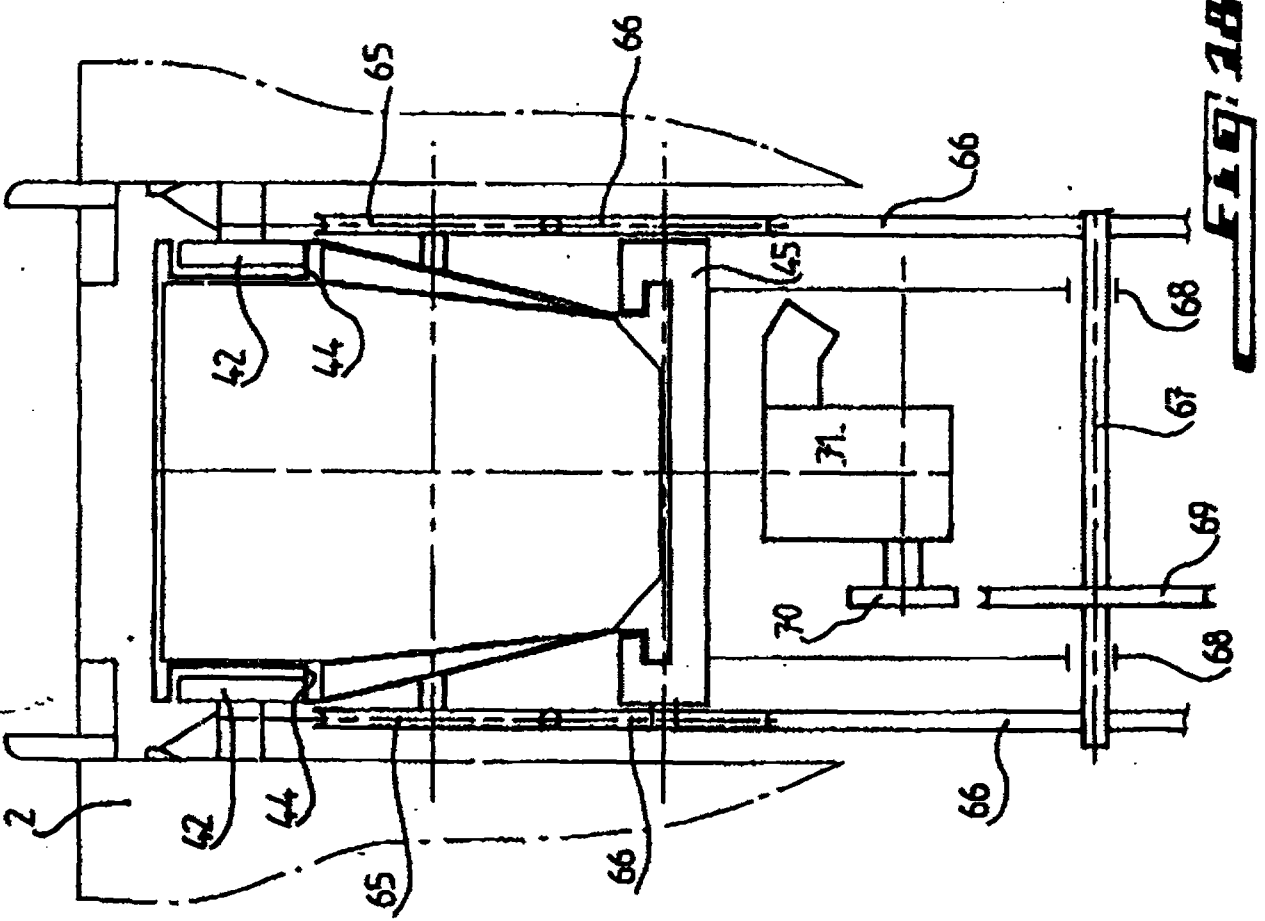


FIG. 1A

33 1 45 62 04 23

11/22



This Sheet Has Been Replaced

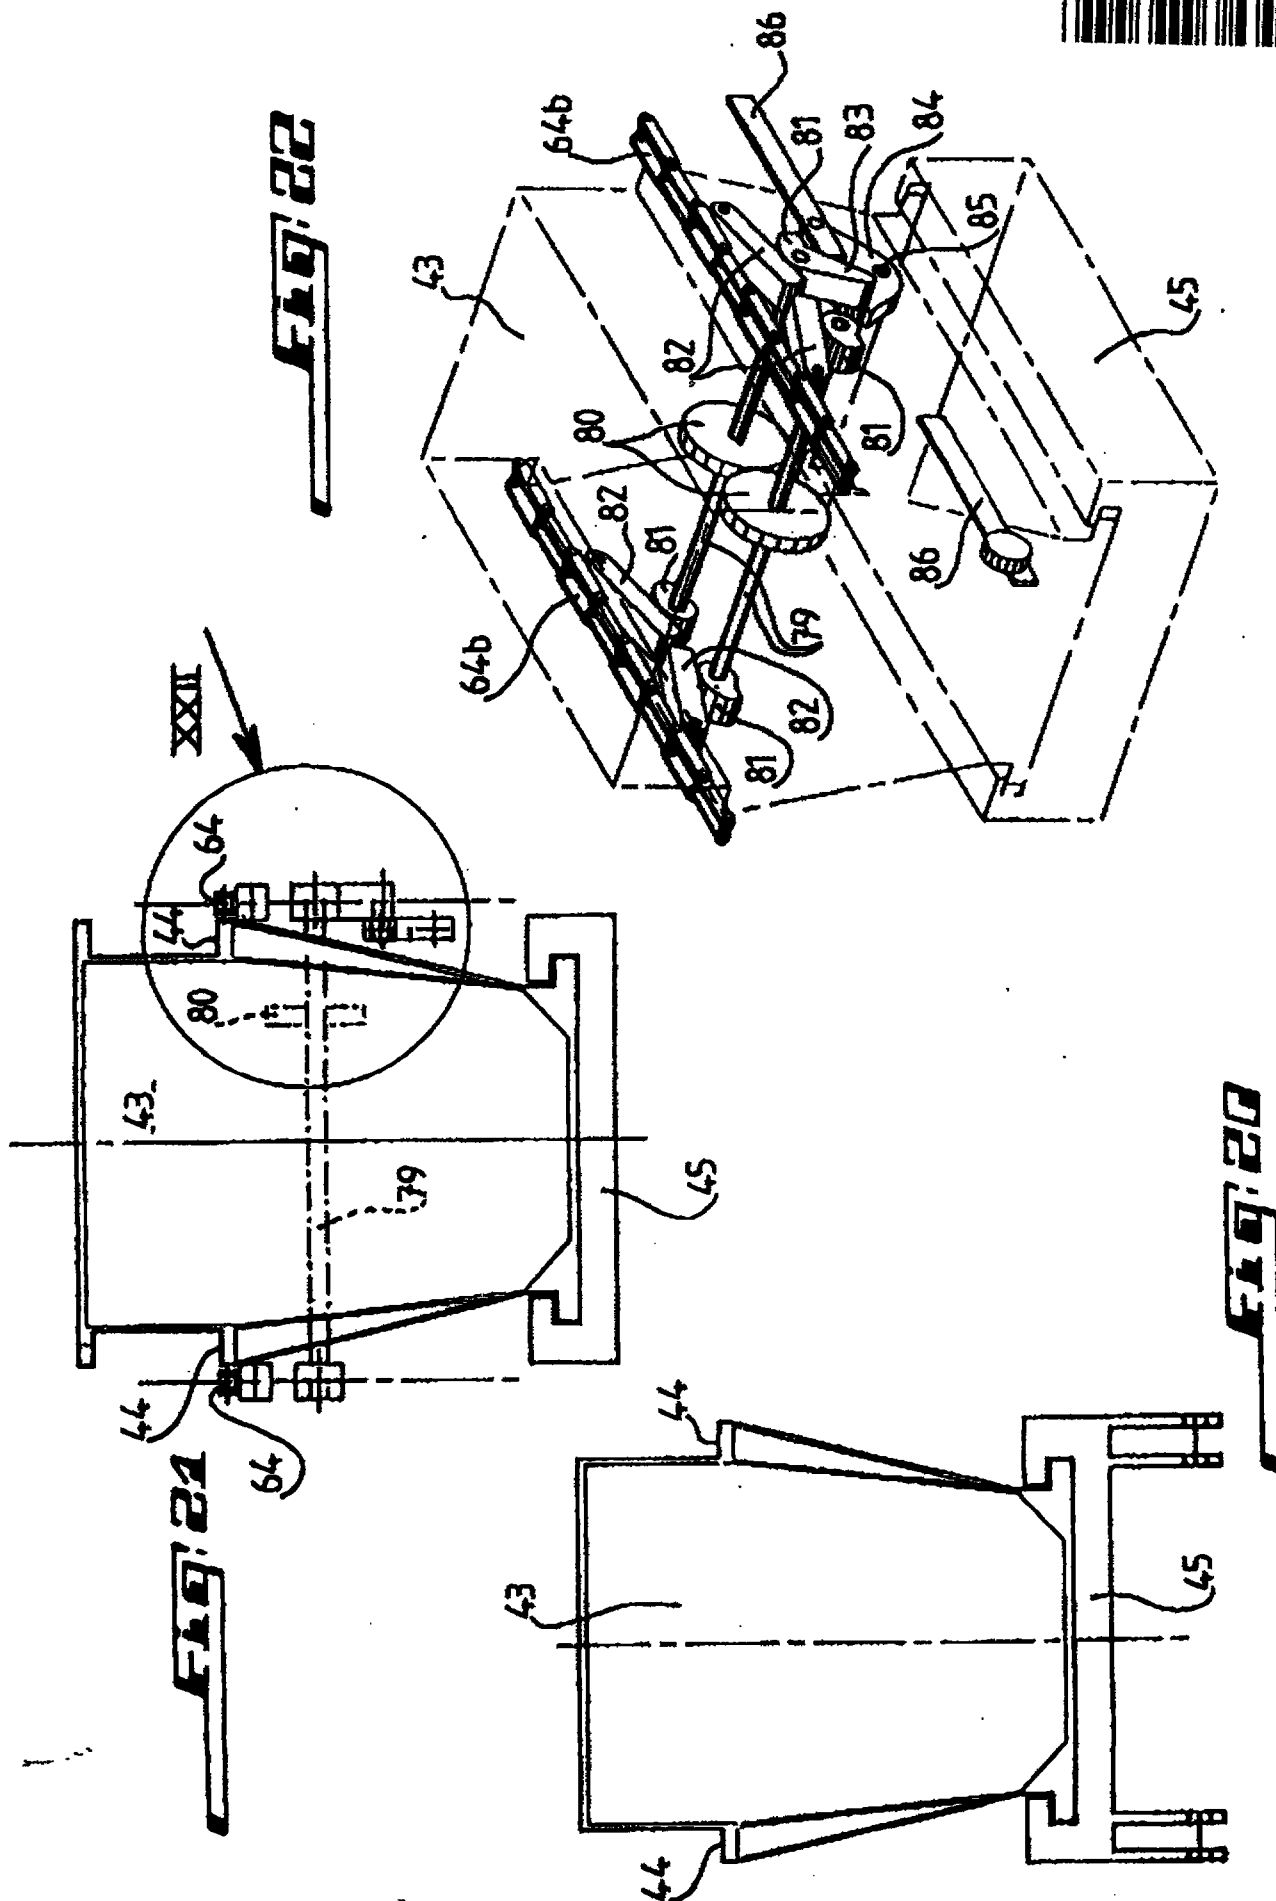

33 1 45 62 04 23

12/22

This Sheet Has Been Replaced

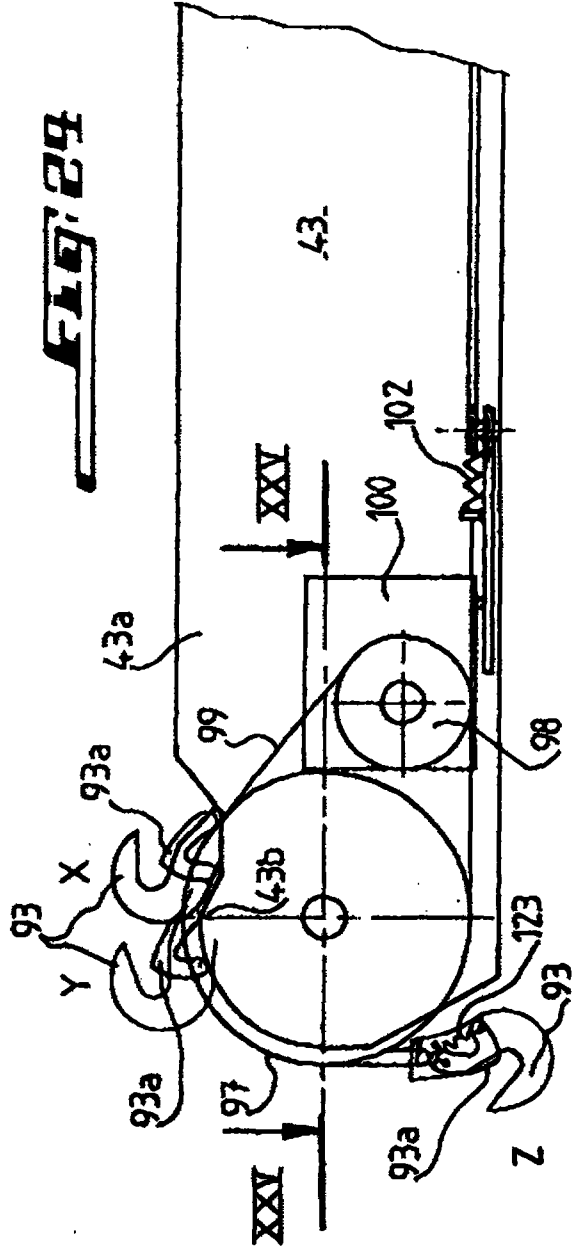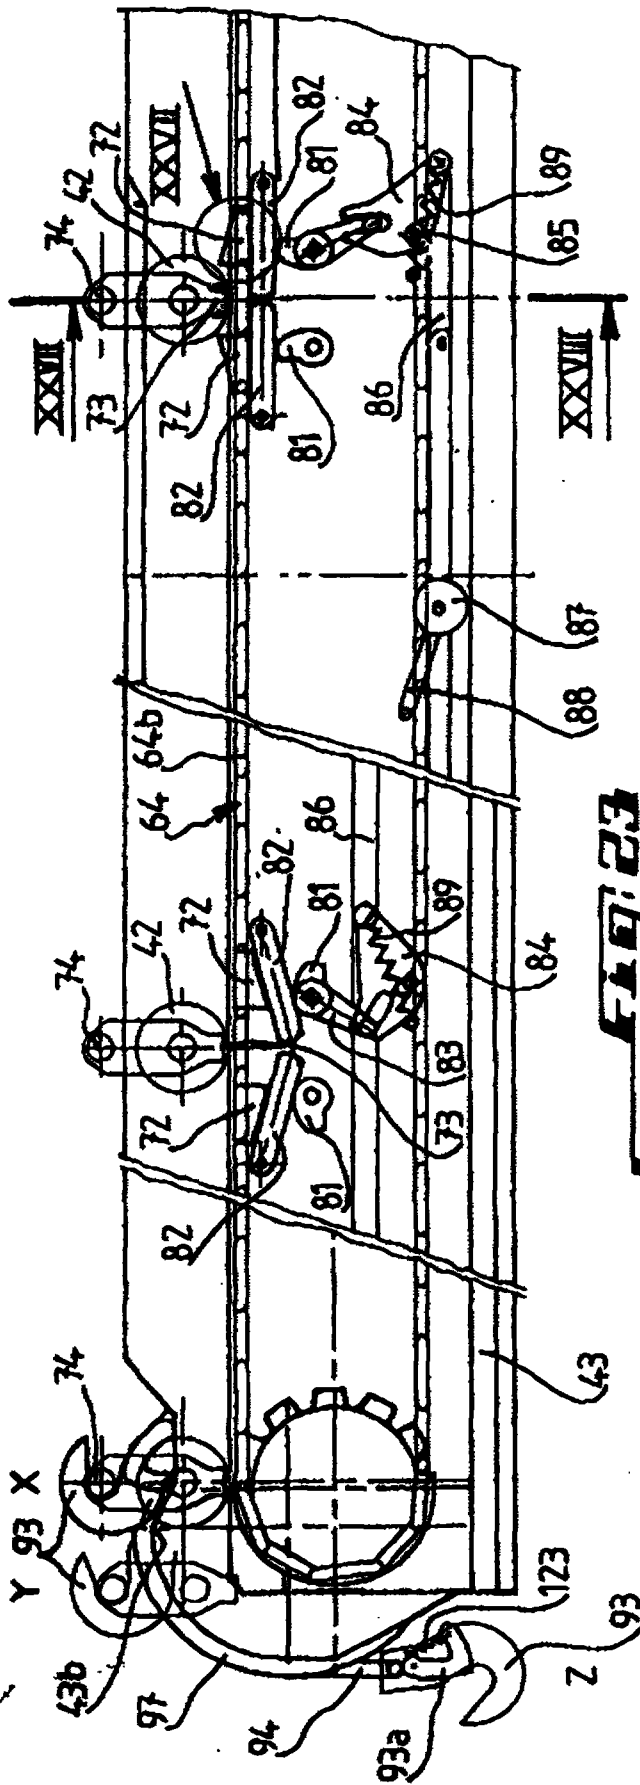

33 1 45 62 04 23

13/22

This Sheet Has Been Replaced

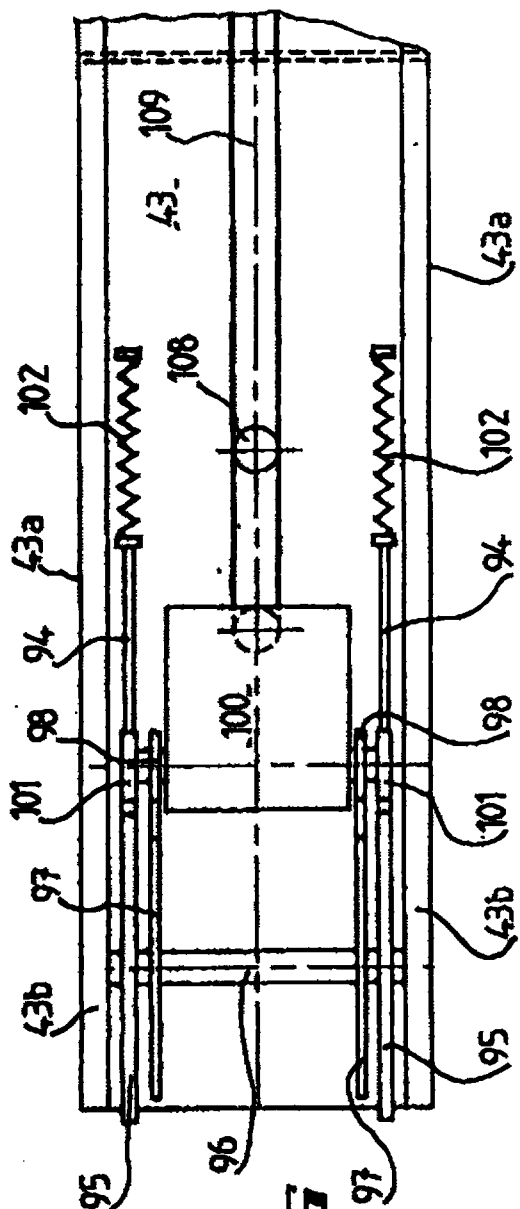


FIG. 25

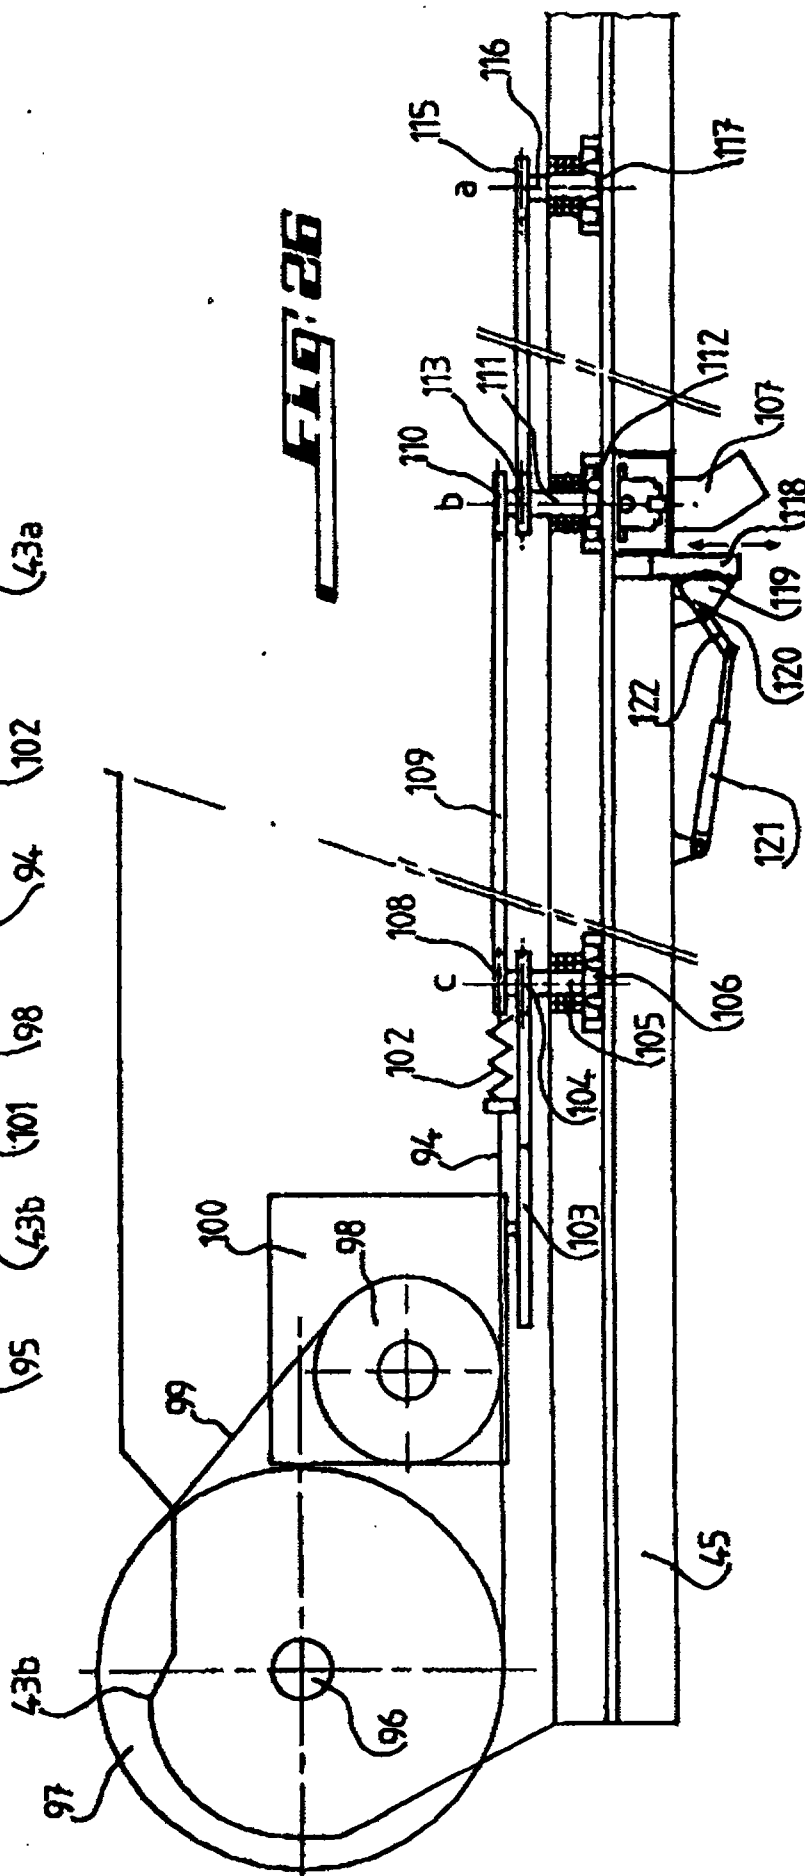


FIG. 26

33 1 45 62 04 23

14/22

This Sheet Has Been Replaced

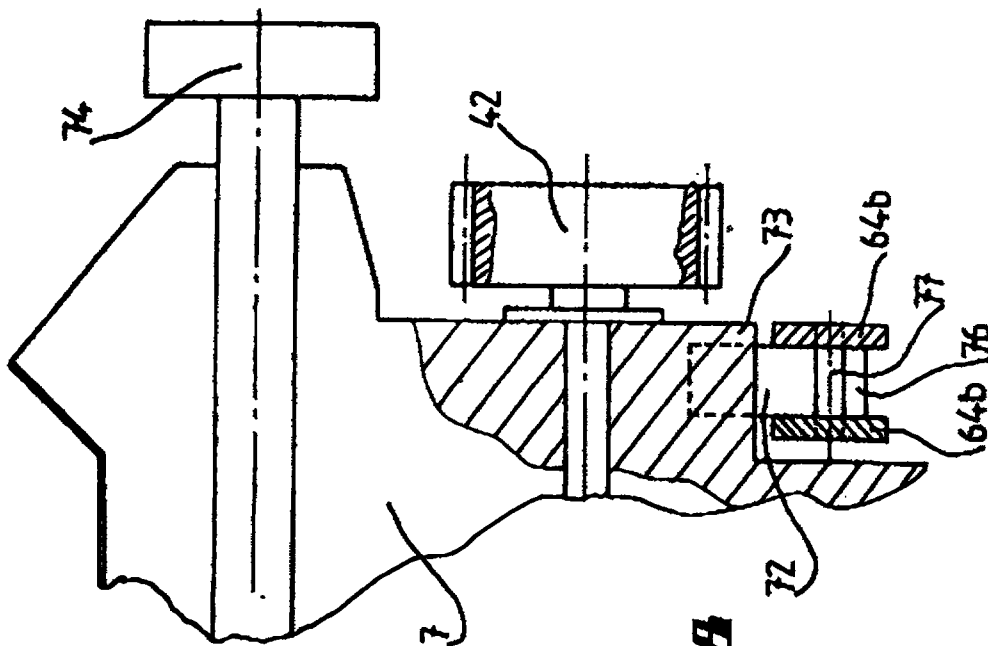


Fig. 28

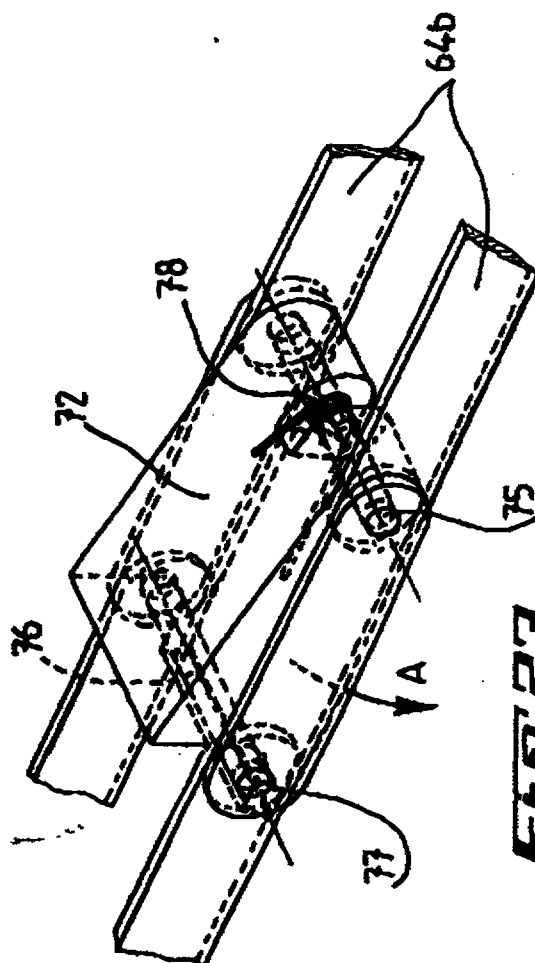


Fig. 27




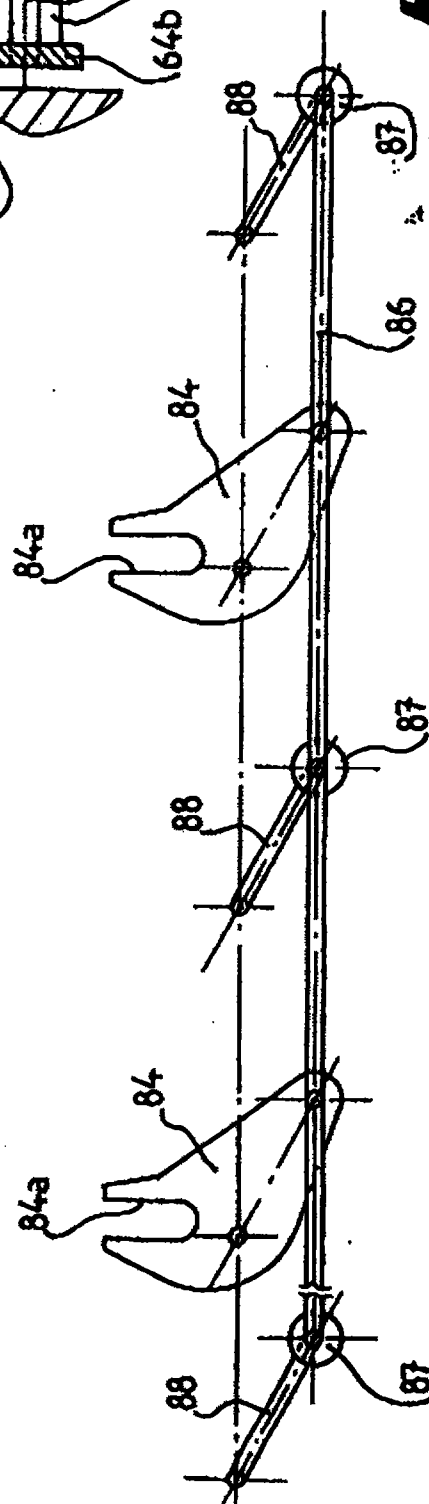


Fig. 29

33 1 45 62 04 23





7/22

This Sheet Has Been Replaced

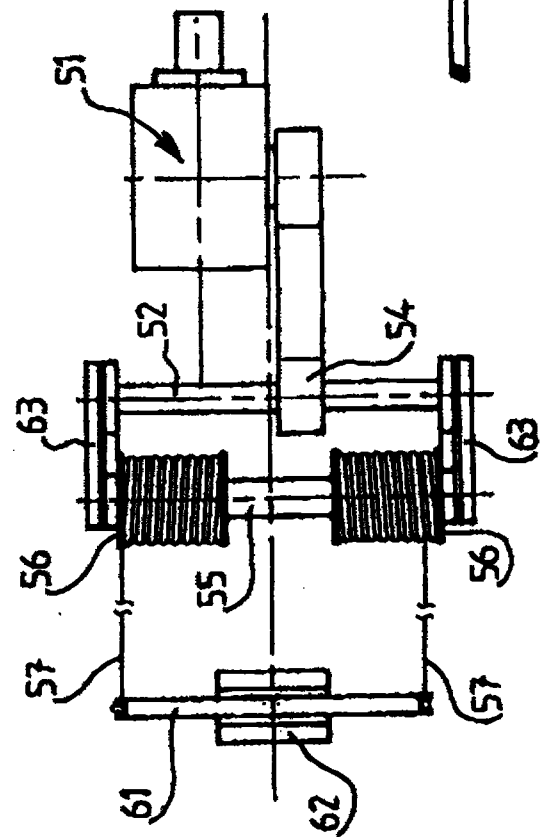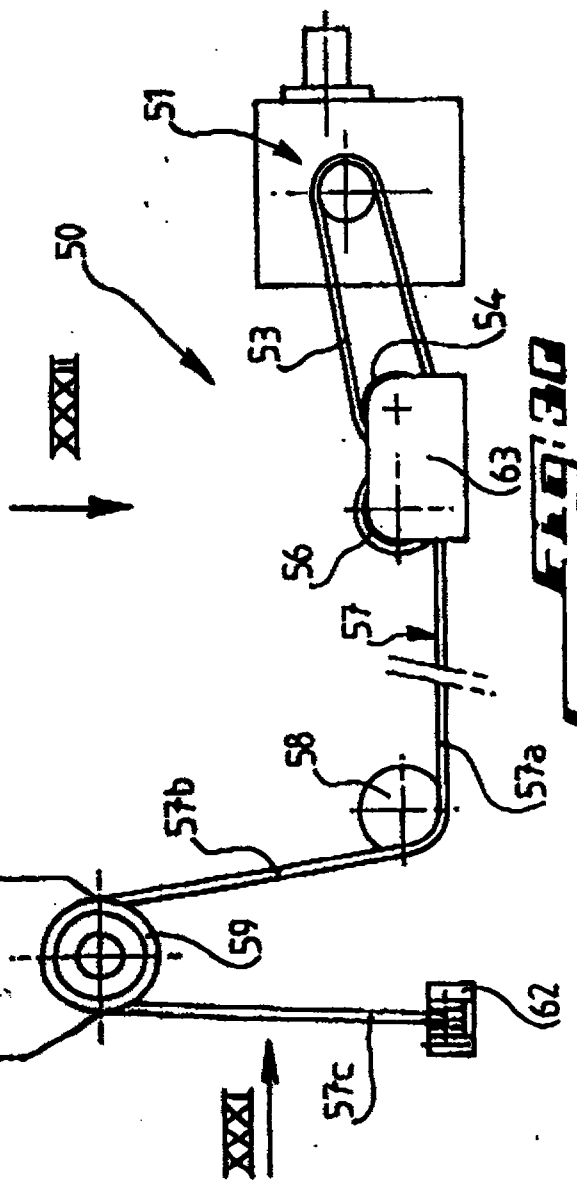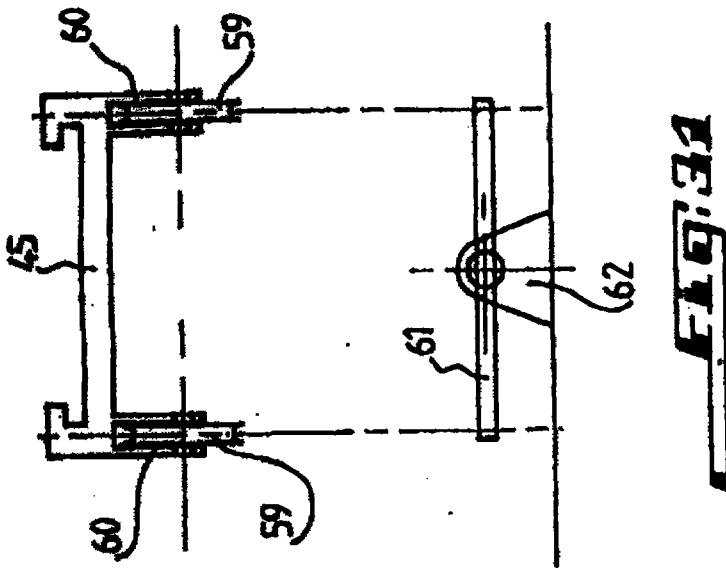



16/22

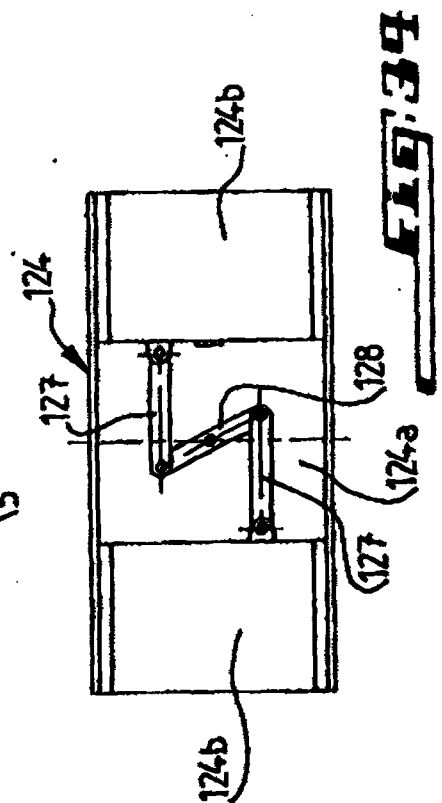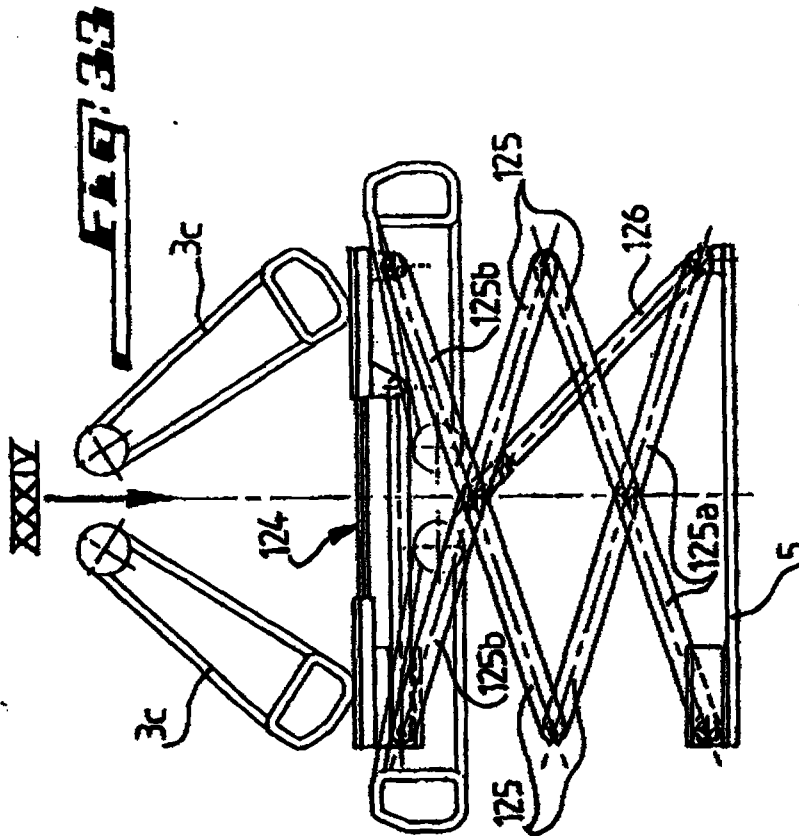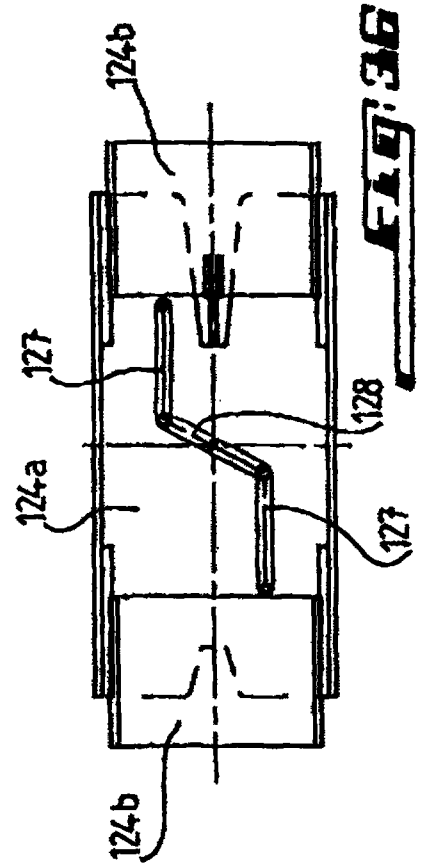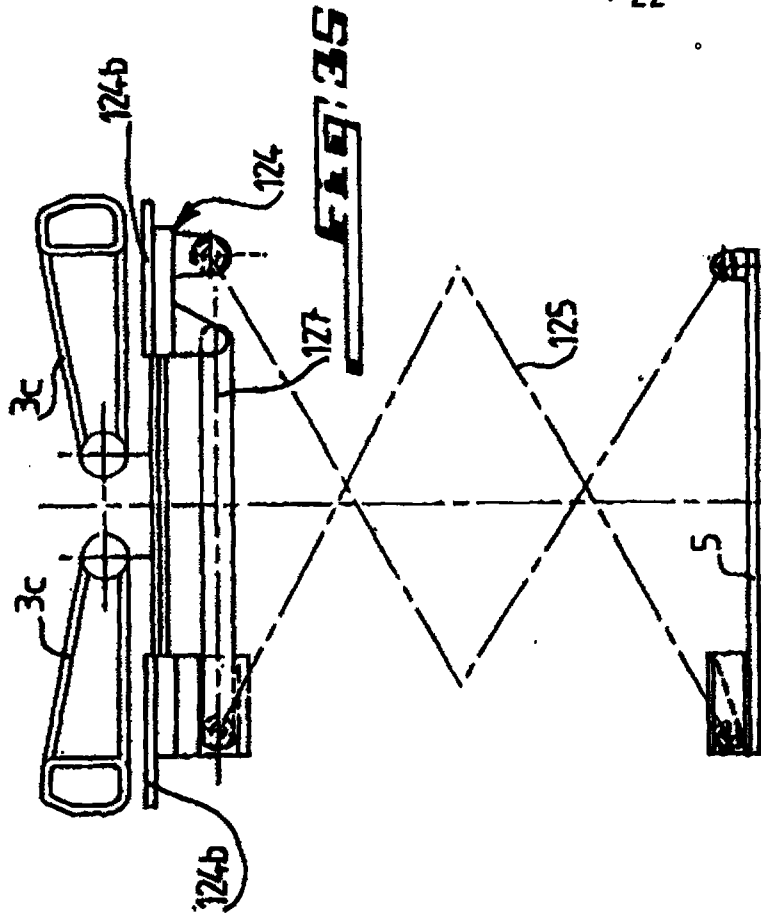


33 1 45 62 04 23

This Sheet Has Been Replaced



17/22




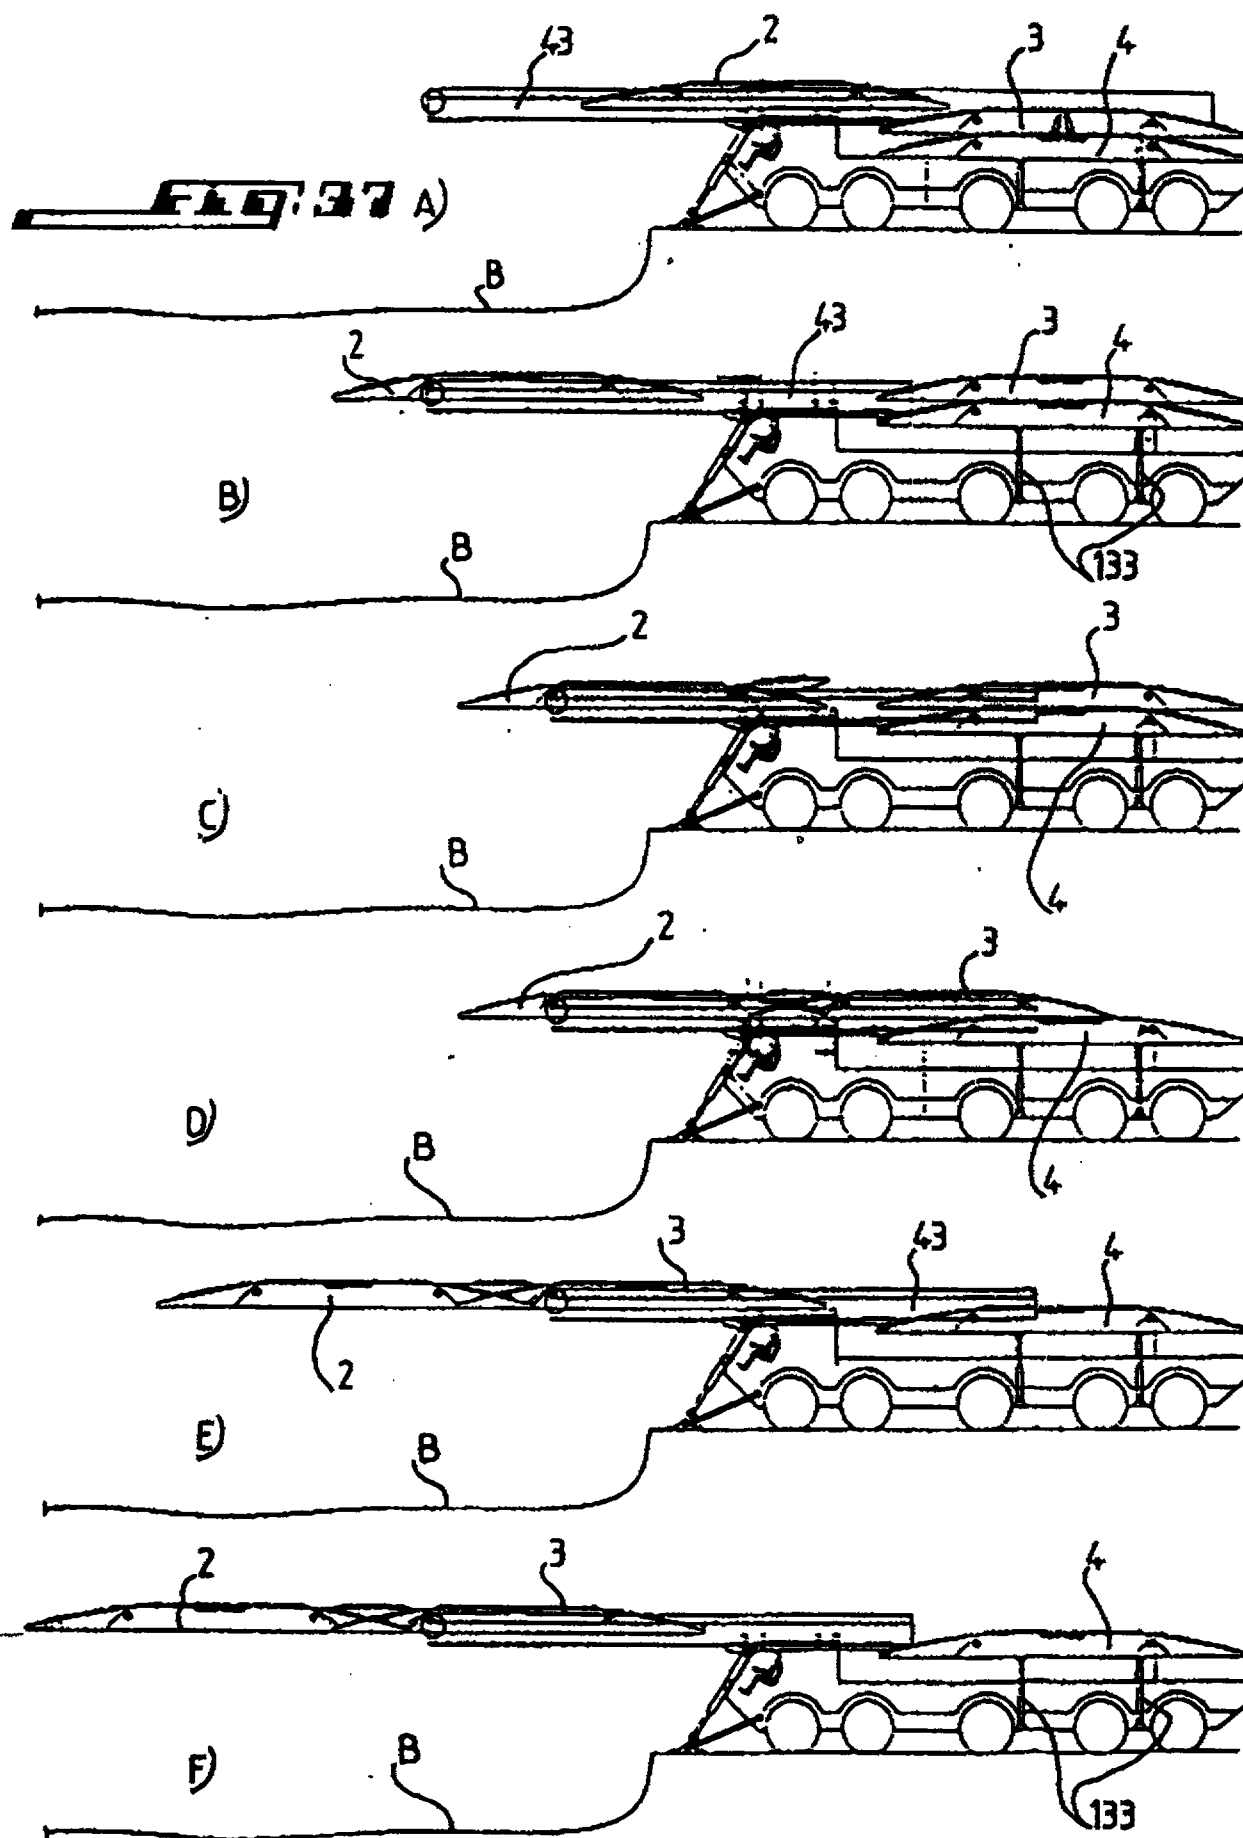


33 1 45 62 04 23

This Sheet Has Been Replaced






18/22

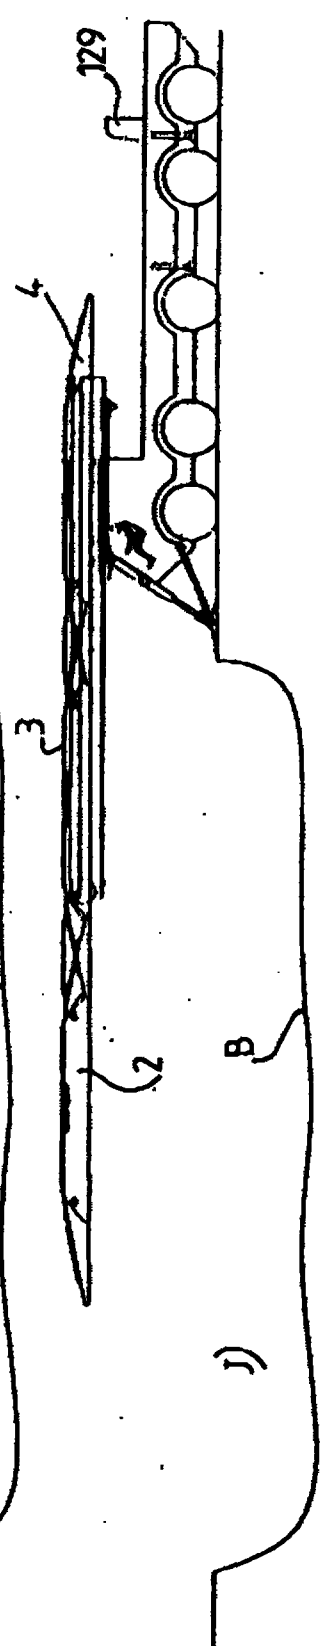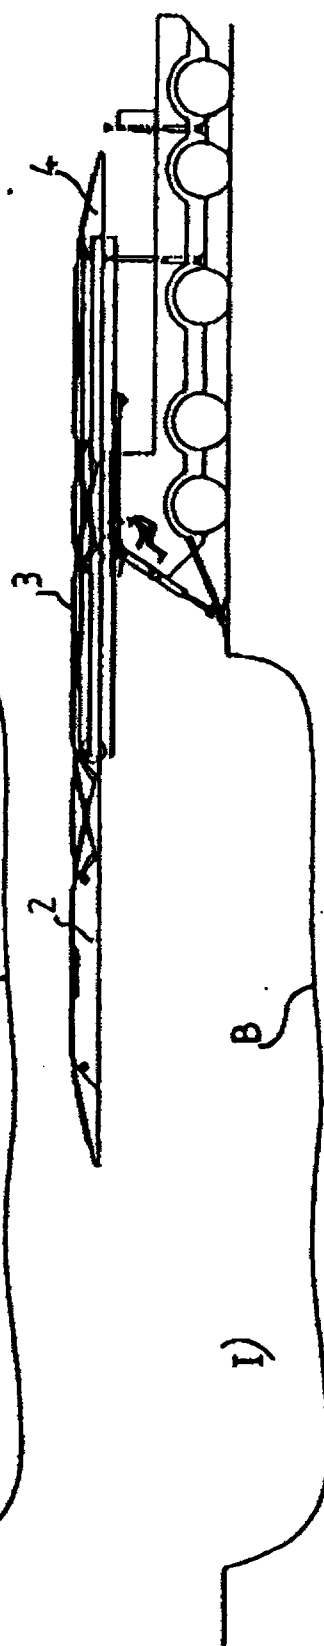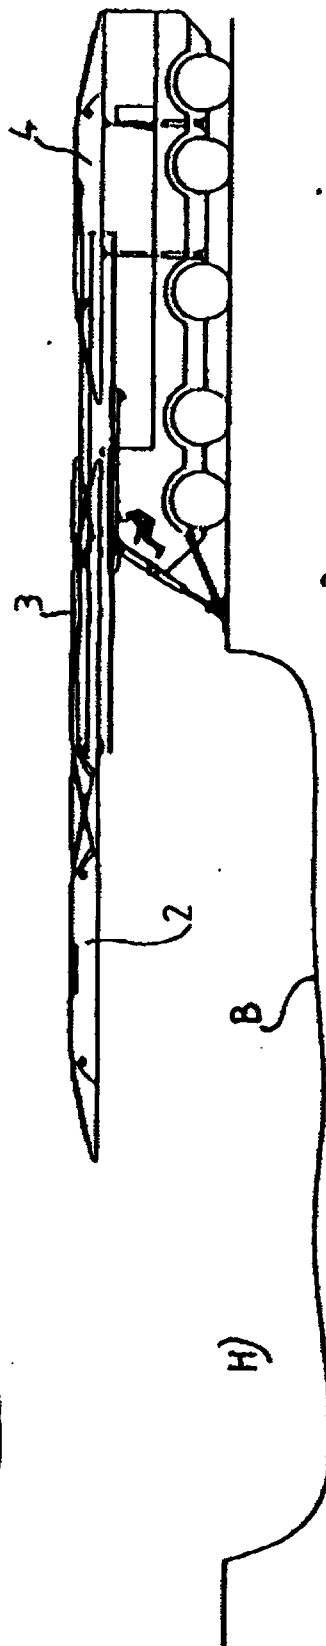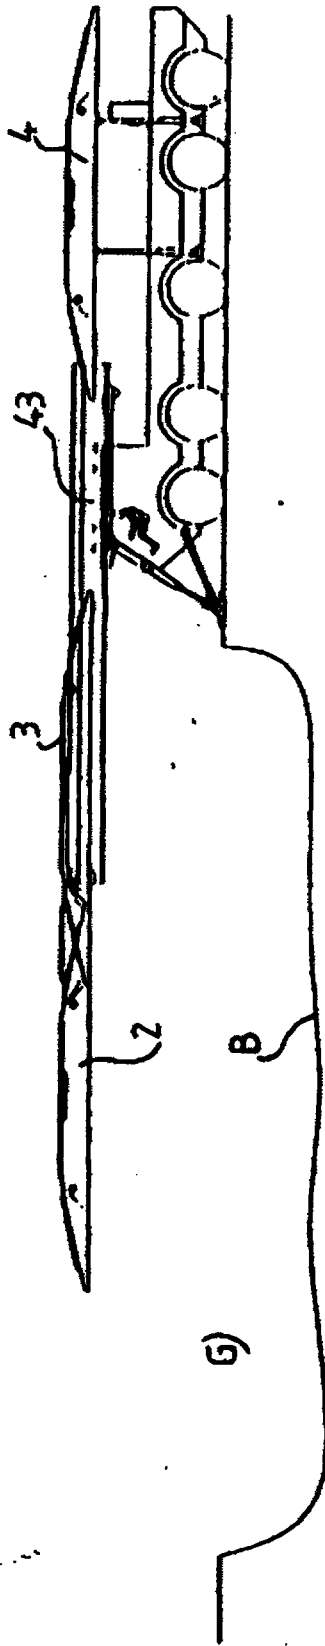

33 1 45 62 04 23




19/22

This Sheet Has Been Replaced

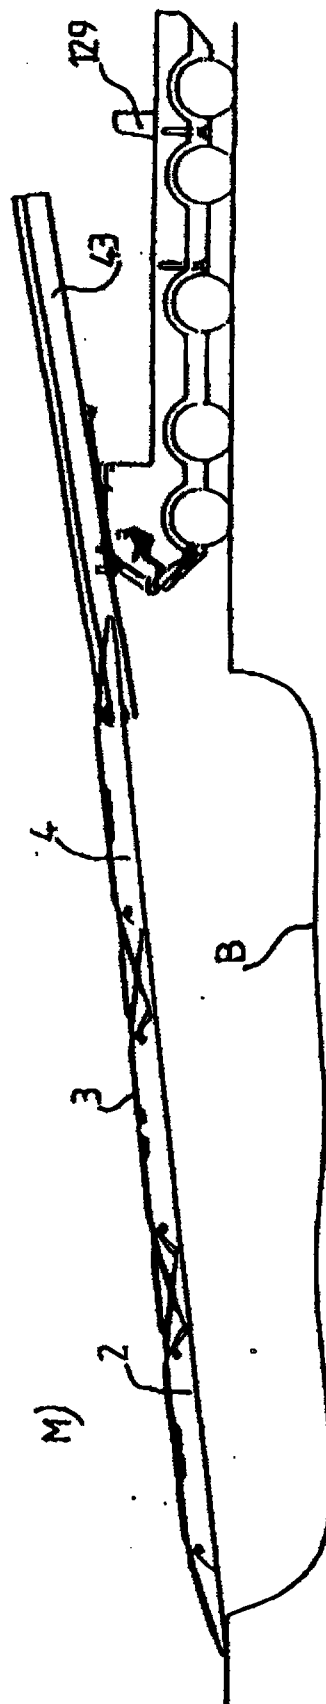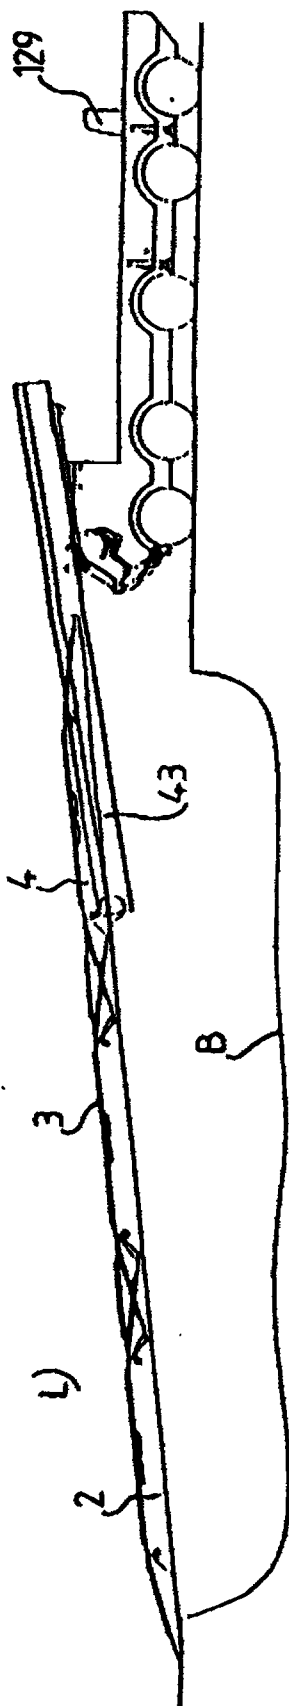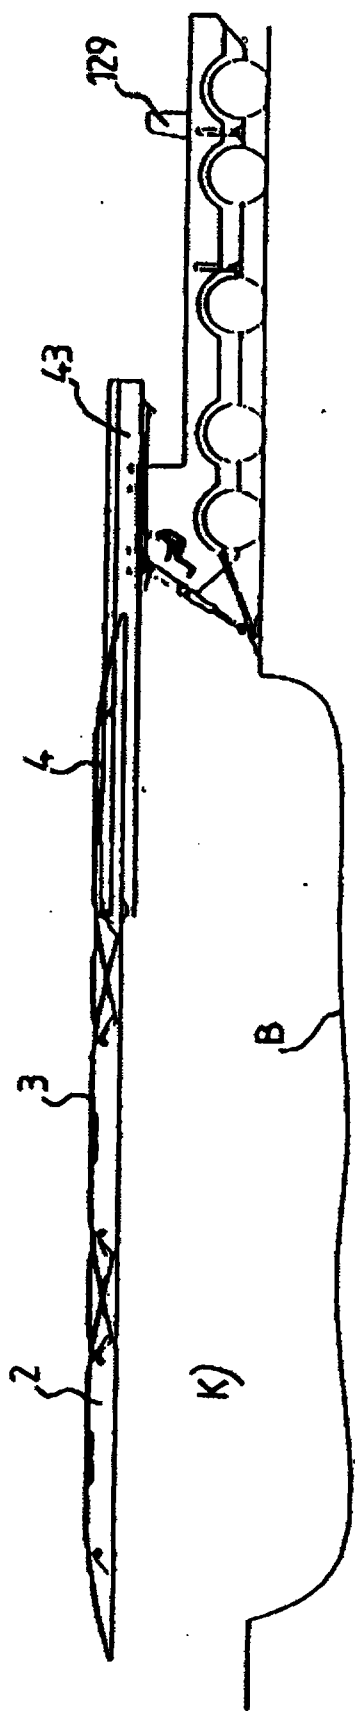

33 1 45 62 04 23

20/22



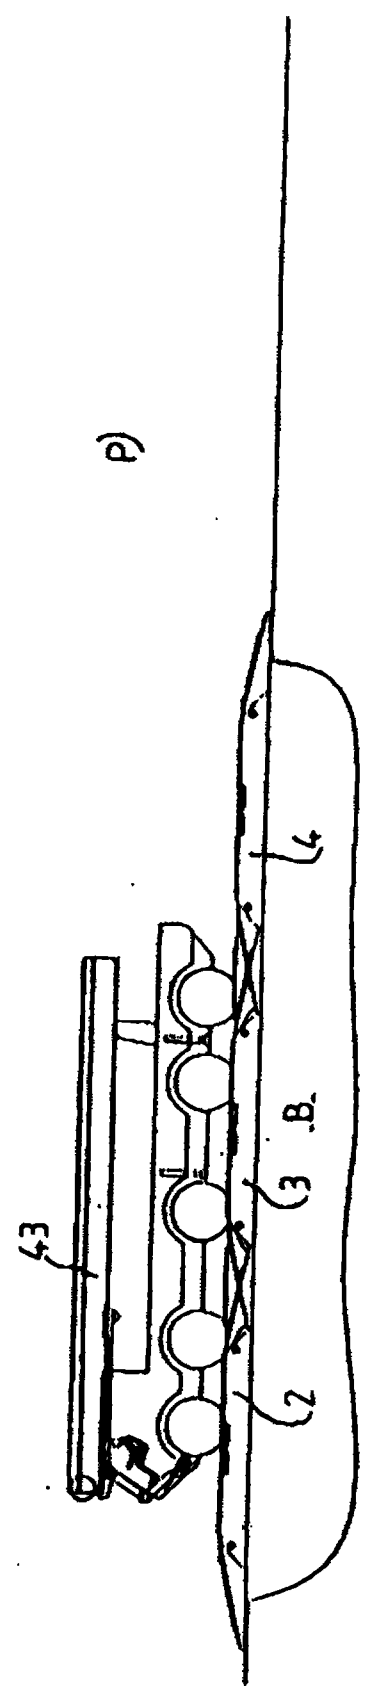
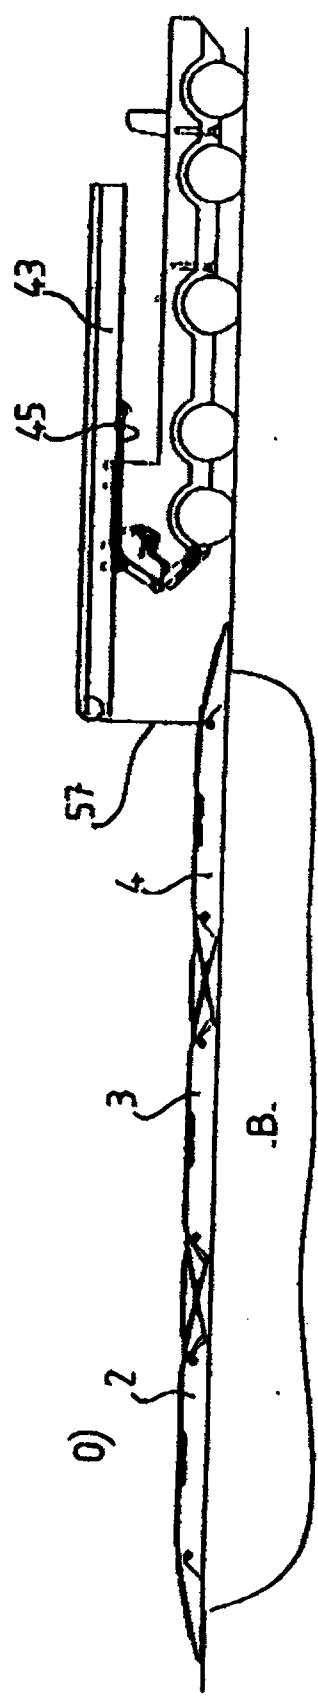
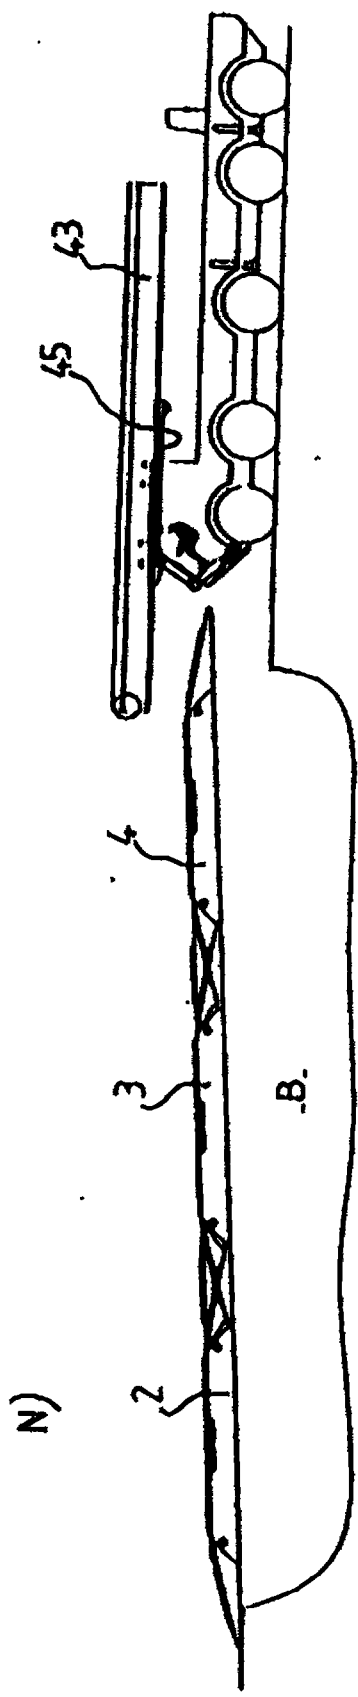


This Sheet Has Been Replaced



33 1 45 62 04 23




21/22

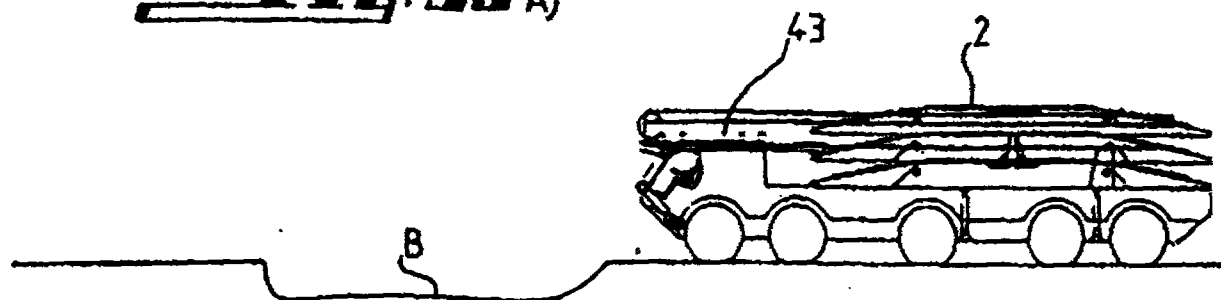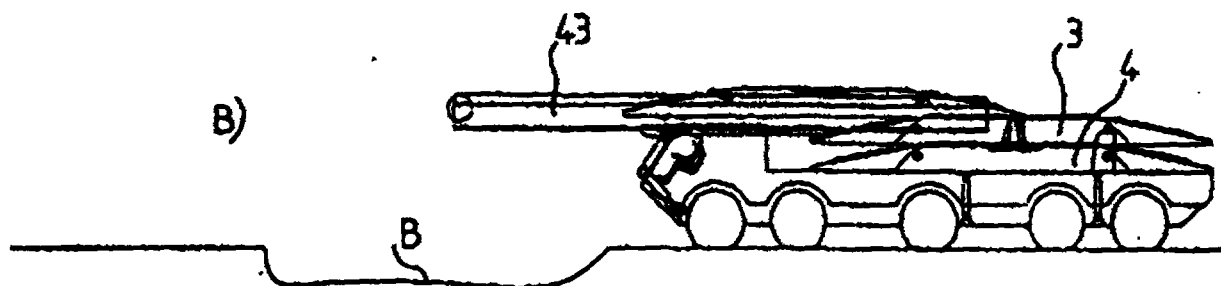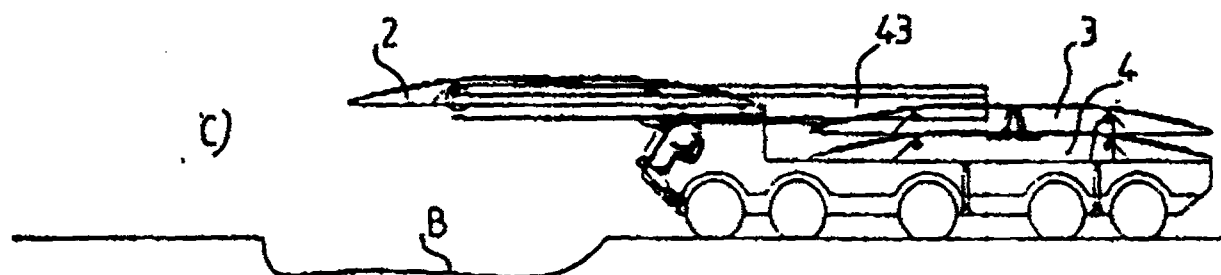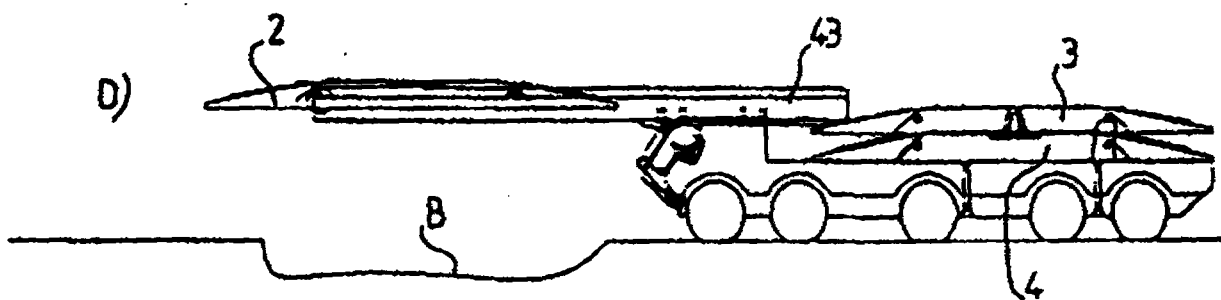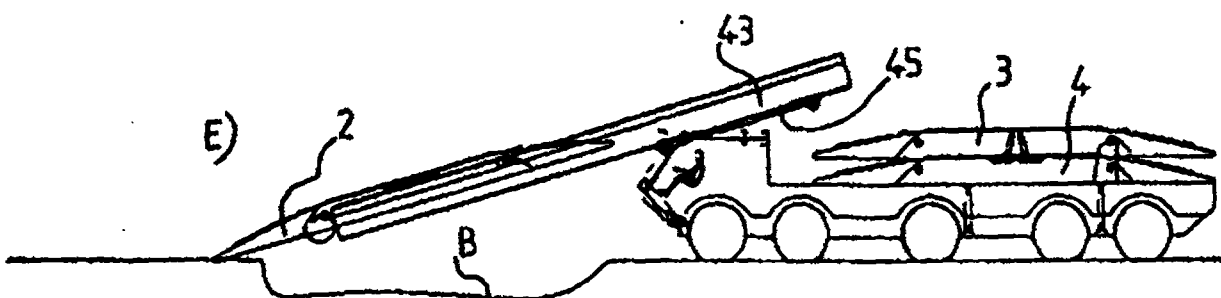FIG. 38 A)**B)****C)****D)****E)**

This Sheet Has Been Replaced



22/22

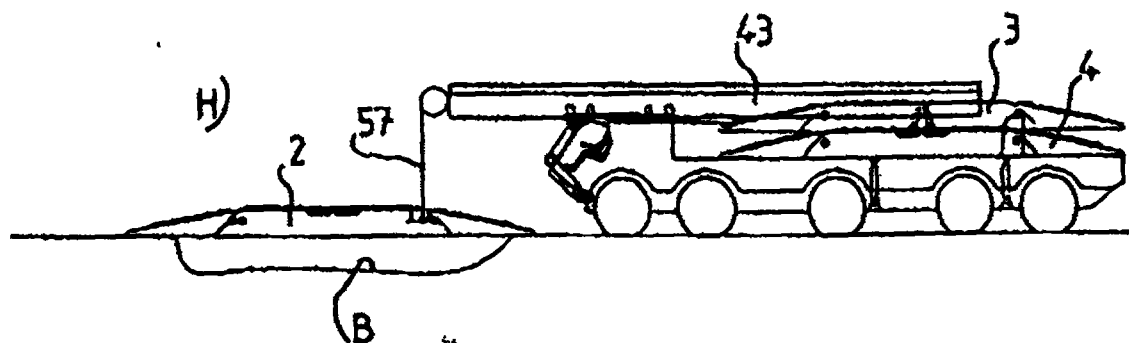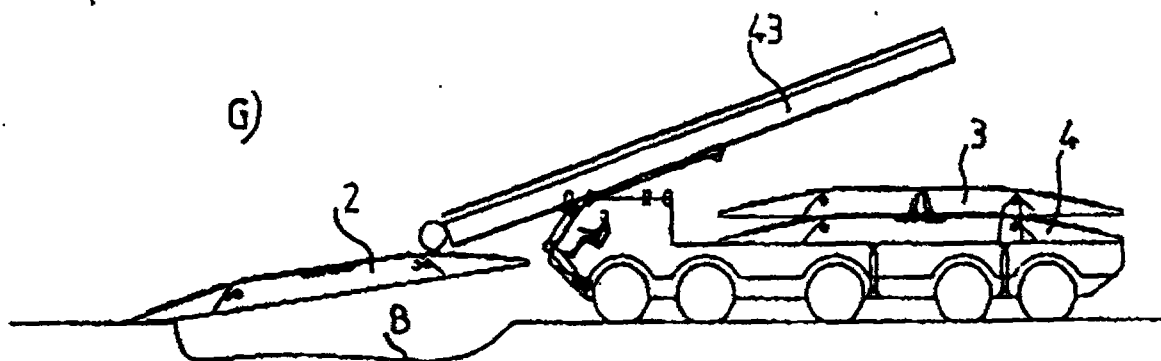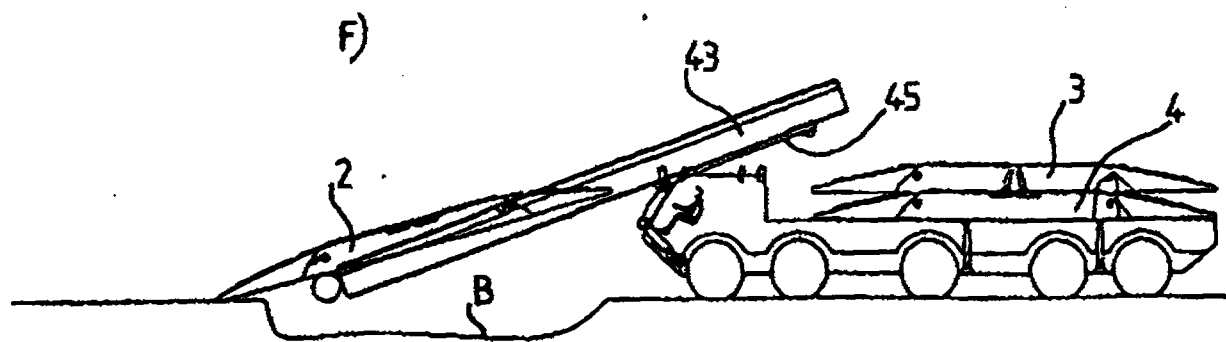

This Sheet Has Been Replaced



REPLACEMENT SHEETS		SG
☒	Description : paged ...1 to paged ...32	
☒	Claim(s) : paged ...22 to paged ...43	
☒	Drawing(s) : paged ...122 to paged ...222	
☒	Abstract : paged ...44 to paged ...	
DATE OF RECEIPT12/2/99.....		

SPANNING BEAM STRUCTURE ADAPTED IN PARTICULAR
TO THE CLEARING OF BREACHES BY VEHICLES AND
STRUCTURE TRANSPORTING AND DEPOSITING SYSTEM

"Spanning beam structure adapted in particular to the clearing of breaches by vehicles and structure transporting and depositing system."

The present invention relates to a spanning beam structure adapted in particular to the clearing of breaches by vehicles such as armoured vehicles of the Engineer Corps and a system for transporting, on a vehicle, of at least two bridging spanning beams adapted to the clearing of breaches and for depositing spanning beams over or above breaches from the vehicle.

There are already known systems allowing to deposit a spanning beam of short length or of greater length after endwise assembly of two or three spanning beams of short lengths from a vehicle. These known systems however are of an extremely complex and sophisticated design and involve a relatively large overhang or cantilever of a launching girder with respect to the vehicle upon the depositing of spanning beams, which overhang or cantilever has to be taken up by suitable means further increasing the bulk or size and the complexity of the system. Moreover the structure of each one of the spanning beams used in these known systems is complicated too and leads to a relatively great mass or weight of spanning beam.

The object of the present invention is to remove the inconveniences referred to hereinabove by at first providing a spanning beam structure adapted in particular

This is the replacement sheet

Date: 13 APR 1998

to the clearing of breaches by vehicles such as armoured vehicles of the Engineer Corps, formed of at least one spanning beam element comprising a rigid central box with an upper treadway and two access jibs assembled to both ends of the central box, respectively, so as to extend the trackway of the central box, at least one of the access jibs being upwards swingable and fastened to the central box by a transverse pivot pin and unlockable locking means and which is characterized in that the locking means comprise at least one pair of locking shafts made fast to the upwards swingable access jib and to the central box while extending longitudinally of the central box along the same axis in the locked position of the access jib and two jaw-like members tightly gripping round two mutually confronting heads of the locking shafts.

According to a characterizing feature of the invention the pivot pin of the upwards swingable access jib is located at the upper part of the central box and the locking shafts are located approximately at the bottoms of the access jib and of the central box with both jaw-shaped members accommodated in a lower transverse space defined between the upward swingable access jib and the central box.

Advantageously the spanning beam structure comprises at least one retractable pin for taking up shearing forces exerted upon the locking shafts upon the passage of the vehicles on the aforesaid trackway and extending longitudinally into two coaxial holes of the upwards swingable access jib and of the central box, respectively.

The aforesaid pin is retracted from the hole of the upwards swingable access jib by a control rod with a threaded end screwed into the pin and mounted for rotation about its axis in a block made fast to the central box so as to fully retract the pin into the hole of the central box formed in the block in coaxial relation to the control rod upon the unlocking of the

upwards swingable jib.

According to still another characterizing feature of the invention both jaw-like members are operated by a mechanism mechanically connected to the control rod and comprising a plate with a guided longitudinal movement controlled by the control rod and two stubs made fast to both jaw-shaped members, respectively, inserted into two oblique grooves, respectively, of the plate so that the controlled motion of the latter moves both jaw-like members towards or away from each other.

The aforesaid control rod comprises a cross pin made fast to the plate through one longitudinal groove formed in one wall of the aforesaid block and the plate is made fast to the block preferably by two parallel L-shaped guiding rails.

At least one pin for guiding the movement of both jaw-like members towards or away from each other is made fast to the central box of the spanning beam element.

Advantageously the spanning beam structure comprises a reducing mechanism mechanically connected to the drive means of the jaw-like members and made fast to the bottom of the central box so as to be removably coupled to an outer drive motor.

Preferably the other access jib of the spanning beam element is stationary and comprises a transverse bar for locking a hook-shaped portion at the end of a movable jib unlocked from another similar spanning beam element, a member for unlocking the hook-shaped portion from the transverse bar and preferably constituted by a jack made fast to the stationary access jib and the jack rod of which lifts or raises the upwards swingable access jib of the other spanning beam element and at least one locking pin extending longitudinally of the central box and which may be locked by jaw-like members to the locking pin of the central box of the other spanning beam element when the upwards swingable access jib of the latter is locked to the transverse bar.

The spanning beam structure comprises two spanning

beam elements with parallel treadways and the central boxes of which are connected to each other by two connecting arms forming braces and two access jibs forward or rearward of the structure are stationary and upwards swingable, respectively.

The invention also provides a system for the transfer on a road vehicle such as a truck or a lorry of at least two bridging spanning beams superimposed on a frame of the vehicle, which may be assembled end to end and for depositing each one of the spanning beams or both spanning beams assembled end to end above or over breaches to be cleared, each spanning beam having a structure such as previously defined and of the type comprising a girder for supporting and launching one spanning beam or assembled spanning beams and displaceable in relation to the vehicle towards an overhang or cantilever position at the front portion of the latter, means for displacing the spanning beam or assembled spanning beams in relation to the supporting and launching girder to an overhang or cantilever position at the forward portion of the said girder and a plate supporting in guiding relationship the supporting and launching girder and rocking or tilting in relation to the vehicle to allow to deposit the spanning beam or assembled spanning beams and which is characterized in that it comprises at least one controlled hook for depositing the spanning beam or assembled spanning beams, mounted at the end of the supporting and launching girder and capable of assuming a relative position for supporting a shaft for handling the spanning beam or assembled spanning beams, located opposite to that end of the spanning beam or of assembled spanning beams which is bearing upon that bank of the breach to the cleared which is opposite to the vehicle through tilting or rocking of the supporting plate, from which supporting position the hook is lowered for depositing the other end of the spanning beam or assembled spanning beams on that bank of the breach which is close to the vehicle.

This is the replacement sheet

Date: 13 APR 1998

The overhang or cantilever position of the supporting and launching girder at the front of the vehicle upon depositing the spanning beam or assembled spanning beams is relatively reduced by about one quarter of its full length.

Preferably the means for displacing the spanning beam or assembled spanning beams in relation to the aforesaid girder comprise two endless drive chains arranged on either side of the girder and mounted each one on two toothed wheels fastened to the ends of the girder with the lower side of each drive chain passing or being reeved over three toothed guide wheels arranged according to a triangle configuration and made fast to the supporting and rocking plate, a motor-reduction gear set for simultaneously driving two of the guide pinions of both drive chains, respectively, and fastened to the supporting and tilting plate and at least two pairs of elements forming retractable forks, fastened to both drive chains, respectively, in symmetric relation to the longitudinal center line axis of the girder, each pair of fork-like elements gripping one corresponding projecting portion of the central box of one spanning beam located plumb with a handling shaft underneath the latter.

Both pair of fork-shaped elements are simultaneously brought into a position for gripping aforesaid projecting portions or into a position retracted by a mechanical mechanism operated by a control device fastened to the supporting and rocking plate.

Advantageously each pair of fork-like elements comprises two brackets or dogs pivotally mounted in mutually confronting relationship on two parallel pins of links of one drive chain and the aforesaid mechanism comprises two transverse shafts rotatably mounted in the aforesaid girder and rotated together by two meshing toothed wheels made fast to both transverse shafts, respectively, supporting each one at their ends two external cams pushing two arms, respectively, pivotally mounted on the girder below upper sides of both drive

chains so as to lift or raise the corresponding dogs or brackets into a position projecting above the plane passing on the upper sides of both drive chains and a plate pivotally mounted on one single side of the girder and having one of its ends connected to a control rod and its opposite end comprising a notch engaged in pivoting relationship by the end of one arm for pivoting one of the thrust cams, the pivoting plate being thus capable to tilting or rocking between an operative position for locking the dogs or brackets in their aforesaid gripping position and an inoperative position of retracting the dogs or brackets.

The aforesaid control device comprises an element such as a plate perpendicular to the supporting and tilting plate and vertically movable between a low position and a high position and acting in the stationary position of the girder in relation to the supporting and rocking plate upon a roller made fast to the end of one arm swinging in relation to the girder and forming together with the aforesaid control triangle and the notched pivoting plate a parallelogram deformable between both aforesaid positions of tilting of the pivoting plate.

The aforesaid supporting and rocking plate is located at the front of the vehicle and the aforesaid girder has its portion backwards of the supporting and rocking plate, in the rest or inoperative position of the girder, accommodated between both overlying spanning beams and the connecting arms of both overlying spanning beams, with both connecting arms of the lower spanning beam being each one U-shaped and pivotally connected at its ends to both inner side walls, respectively, of both central boxes of both lower spanning beam elements and being capable of being simultaneously raised to a position parallel to the frame and locked to the lower spanning beam, both U-shaped connecting arms thus increasing, in the lowered position, the room or space for housing the girder.

The system moreover comprises a means for raising the connecting arms of the inner spanning beam elements, consisting of a lifting table mounted on the frame of the vehicle so as to assume an inoperative lowered position and which may be raised from its inoperative position after retraction of the girder from above the lower spanning beam so as to act upon the lower ends of the U-shaped connecting arms and to move them away from each other to the parallel position of locking of the connecting arms of the lower spanning beam.

Preferably two hooks for supporting both handling shafts, respectively, made fast in confronting relationship to two spanning beam elements, respectively, are provided and are fastened to the ends of two operating chains mounted on two parallel toothed wheels, respectively, at the end of the girder and driven by a reducing mechanism fastened to the girder and controlled by a preferably hydraulic motor fastened to the supporting and tilting plate and mechanically coupled through a removable connection to the reducing mechanism at determined fixed positions of the girder in relation to the supporting and rocking plate.

Each aforesaid hook comprises a latch for locking a handling shaft and arranged to co-operate with the upper edge of the corresponding side wall of the girder upon a controlled displacement of the hook in the direction reverse from that of lowering of the hook so as to be unlocked by the action of an elastic member in a relative position of the hook receiving the corresponding handling shaft and the hook is then displaced over a relatively small stroke simultaneously with the spanning beam in the direction of downward motion of the hook so as to automatically bring the latch into the position of locking the handling shaft in the hook.

The aforesaid girder is displaced in a translatory motion in the longitudinal direction in relation to the supporting and tilting plate by a motor-reducing gear set fastened underneath the said plate driving at least one

This is the replacement sheet

13 APR 1998

Date:

97

drive pinion meshing with a longitudinal toothed rack fastened below the girder which comprises at the upper portion tracks forming rails for guiding the spanning beams on which are moving rollers for the travel of the spanning beams.

The system also comprises a device for operating the tilting of the aforesaid supporting plate, comprising two side cables passing over two pulleys, respectively, made fast to the supporting plate rearwards of the tilting axis of the said plate while defining two sides perpendicular to the frame of the vehicle, anchored to the latter and two parallel sides extending along the frame and winding up on two drums, respectively, of a winch driven by a motor-reducing gear set made fast to the frame at the rear of the vehicle.

Advantageously, both aforesaid perpendicular sides have their ends connected to a balancer in the shape of a bar parallel to the frame of the vehicle and mounted for swinging motion about a central longitudinal shaft made fast to a clevis fastened to the frame of the vehicle and the parallel sides are extending back to the pulleys of the supporting plate through the medium of guide pulleys.

The system in addition comprises two pairs of jacks arranged on either side of the vehicle so as to lift the lower spanning beam after disengagement of the upper spanning beam on the girder at the level of the upper spanning beam with a view to couple it endwise of the latter.

Each spanning beam comprises two pairs of front and rear handling shafts, respectively, two handling shafts of each pair being fastened in confronting relationship to both central boxes, respectively, of both spanning beam elements at the upper part thereof.

The invention will be better understood and further objects, characterizing features, details and advantages thereof will appear more clearly as following explanatory description proceeds with reference to the accompanying diagrammatic drawings given by way of non

limiting example only illustrating a presently preferred specific embodiment of the invention and wherein :

- Figure 1 shows a road vehicle provided with a system according to the invention in the transport position and allowing to deposit spanning beams above or over breaches to be cleared ;

- Figure 2 is a view in the direction of the arrow II of figure 1 ;

- Figure 3 is a view similar to that of figure 1 but showing the system in its configuration prior to laying down a spanning beam ;

- Figure 4 is a top view according to the arrow IV of figure 3 ;

- Figure 5 is a view according to the arrow V of figure 3 ;

- Figure 6 shows a side view of a spanning beam according to the invention ;

- Figure 7 is a top view according to the arrow VII of figure 6 of a central portion of the spanning beam ;

- Figure 8 partially shows two spanning beam elements assembled end to end ;

- Figure 9 is an enlarged view of the portion circled at IX of figure 6 ;

- Figure 10 is an enlarged view of the portion circled at X of figure 8 ;

- Figure 11 is an enlarged view of the portion circled at XI of figure 8 ;

- Figure 12 is a view in section taken upon the line XII-XII of figure 11 ;

- Figure 13 is a sectional view showing two jaw-elements of locking pins in the unlooked spread position ;

- Figure 14 is a perspective view of the mechanism allowing in particular to operate the jaw-like elements for locking the locking pins ;

- Figure 15 is an enlarged sectional view showing a bolt for taking up shearing stresses exerted upon the

locking pins during the passing of vehicles on the spanning beam ;

- Figure 16 is a view in section taken upon the line XVI-XVI of figure 6 ;

- Figure 17 illustrates a reducing mechanism forming part of the control means for locking the jaw-like elements and the locking bolts ;

- Figure 18 is a view in section taken upon the line XVIII-XVIII of figure 1 ;

- Figure 19 is a view in section taken upon the line XIX-XIX of figure 1 ;

- Figure 20 is a view in section taken upon the line XX-XX of figure 1 ;

- Figure 21 is a view in section taken upon the line XXI-XXI of figure 1 ;

- Figure 22 is an enlarged perspective view of the portion circled at XXII of figure 21 ;

- Figure 23 is a partial longitudinal view of the girder forming part of the system according to the invention ;

- Figure 24 is a view in longitudinal section of the end of the girder ;

- Figure 25 is a view in section taken upon the line XXV-XXV of figure 24 ;

- Figure 26 is an enlarged view of figure 24 showing three different positions which the girder may assume in relation to a tilting support plate of the vehicle ;

- Figure 27 is an enlarged view in section taken upon the line XXVII-XXVII of figure 23 ;

- Figure 28 is a view in section taken upon the line XXVIII-XXVIII of figure 23 ;

- Figure 29 is a diagrammatic view showing a rod and rollers for operating the locking or the unlocking of the fork-like elements ;

- Figure 30 shows a device for controlling the rocking of the girder-supporting plate ;

- Figure 31 is a view seen in the direction of the

This is the replacement sheet

Date: 13 APR 1998
97

arrow XXXI of figure 30 ;

- Figure 32 is a top view according to the arrow XXXII of figure 30 ;

- Figure 33 shows a table for lifting the connecting arms of two spanning beam elements ;

- Figure 34 is a top view according to the arrow XXXIV of figure 33 ;

- Figure 35 is a view like figure 33 with the lifting table in the upper position ;

- Figure 36 is a view according to the arrow XXXVI of figure 35 ;

- Figures 37A to 37P show the various steps of assembling three spanning beams to form a spanning beam of greater length and for depositing the latter above a breach to be cleared ; and

- Figure 38A to 38H show the different steps for laying down a spanning beam over a breach to be cleared.

Referring to figures 1 to 36 the reference numeral 1 designates a road vehicle such as a truck or a lorry allowing to carry towards at least one breach to be cleared by vehicles such for instance as armoured vehicles of the Engineer Corps, three spanning beams superimposed on a longitudinal frame 5 of the vehicle and consisting of an upper spanning beam 2, an intermediate spanning beam 3 and a lower spanning beam 4, respectively.

The vehicle 1 comprising a double front cabin 6 extended rearwards by the longitudinal frame 5 supports a system adapted for separately depositing the spanning beams 2, 3, 4 over or above breaches or to assemble at least two spanning beams end to end and to deposit the assembled spanning beams above a breach.

The spanning beams 2, 3 and 4 are identical and are each one formed of two parallel spanning beam elements 2a, 2b ; 3a, 3b ; 4a, 4b assembled by two connecting arms forming braces 2c, 3c and 4c. Both spanning beam elements of each spanning beam 2, 3, 4 comprise two parallel top trackways 2d, 3d and 4d.

This is the replacement sheet

Date: 12 APR 1998

According to the invention each spanning beam element comprises a rigid central box 7 and two access jibs 8, 9 assembled to both ends of the central box 7, respectively, so as to extend the top trackway of the central box. The access jib 8 is fastened at the upper part of the central box 7 by a transverse pivot pin 10 and at the lower part of the central box 7 by locking means which are ununlockable so as to allow the jib 8 to be raised or swung upwards about its pivot pin 10. These locking means comprise at least two locking shafts or bolts 11, 12 made fast to the movable access jib 8 and to the central box 7, respectively. By way of example twenty pairs of locking bolts 11, 12 are provided in parallel relationship in a same plane forming the bottom of the spanning beam element. Thus the locking shafts or bolts 11, 12 in the locked position of the movable jib 8 are extending in parallel relation to the longitudinal axis of the spanning beam element with two shafts or bolts of a same pair being aligned. The locking means moreover comprise two jaw-like members 13, 14 tightly gripping round or clamping mutually confronting heads 15, 16, respectively, of the locking bolts 11 and 12. Both jaw-shaped members 13, 14 are arranged transversely of the longitudinal axis of the spanning beam element within a lower space 17 defined between the movable access jib 8 and the central box 7. For taking up the shearing forces exerted upon the locking bolts 11, 12 upon the passing or travelling of vehicles on the trackway of each spanning beam element, there are provided two longitudinal retractable pins 18 of which a single one is shown and located on either side of both ends of the two jaw-like members 13, 14, respectively. Each pin 18 in the locked position of the movable jib 8 extends into two coaxial passage-ways or holes 19, 20 formed in the movable jib 8 and in a block 21, respectively, secured to the central box 7 by fastening screws 22. Each pin 18 comprises a thoroughfare tapped hole 23 into which is screwed one threaded end of a control rod or spindle 24 mounted for

This is the full-length sheet

1 per. 100 APR 1958

rotation about its longitudinal center line axis in the block 21. The control rod 24 extends longitudinally of the central box 7 to a first reducing mechanism 25 fastened at the bottom of the central box 7. The reducing mechanism 25 is driven by a transverse shaft 26 itself rotated by a second central reducing mechanism 27 also fastened at the bottom of the central box 7. The reducing mechanism 27 may be actuated by an external preferably hydraulic motor, removably coupled to the reducing mechanism 27 as will be explained later. Advantageously as better shown on figure 14, both jaw-shaped members 13, 14 and both pins 18 of a spanning beam element are simultaneously operated by a control mechanism comprising in the vicinity of each one of the ends of the jaw-like members 13, 14 a plate 28 fastened to the block 21 in guided relationship, for instance by two guide rails 29 so as to be capable of displacing itself along a longitudinal direction between two end positions of closing of the jaw-like members 13, 14 and of insertion of each pin 18 into the corresponding passage-way 19 and of opening of the jaw-like members 13, 14 and of full retraction of each pin 18 into the corresponding passage-way 20 of the block 21, respectively. For that purpose each plate 28 is driven in a longitudinal translatory motion by a stub shaft 30 made fast to the corresponding pin 18 and extending through a longitudinal groove 31 of a wall of the block 21 while having its end made fast to one face of the movable plate 28 the opposite face of which comprises two oblique grooves 32 into which are inserted two transverse studs 33, respectively, fastened to the ends of both jaw-shaped members 13, 14. Thus to obtain the unlocking of a movable access jib 8, the external hydraulic motor is coupled to the reducing mechanism 27 and operated for rotating the spindles 26 which are themselves rotating both control rods 24 causing the longitudinal displacement of the pins 18 into the fully retracted position into the passage-ways 20 of the blocks 21. The displacement of the

This is the replacement sheet

Date: 13 APR 1968

pins 18 causes a concurrent displacement of both plates 28 towards the right with respect to figure 14 so as to spread apart both jaw-like members 13, 14. Reversely a displacement by the control rods 24 of the pins 18 in the passage-ways 19 of the movable access jib in the lowered position causes a displacement towards the left of the plates 28 and thereby the movement of both jaw-like members 13, 14 towards each other into the locking position of the locking bolts 11, 12. The relative displacement of both jaw-like members 13, 14 is provided by two parallel guide shafts 34 located in the vicinity of both ends of both jaw-shaped members 13, 14 and made fast to the central box 7 of the spanning beam element.

The access jib 9, opposite to the movable jib 8 of each spanning beam element is stationary and comprises at its upper part a transverse bar 35 adapted for the locking of one hook-shaped portion 36 at the end of an unlocked movable jib 8 of another spanning beam element. The bar 35 and the hook-shaped portion 36 are shaped so as to prevent the movable jib 8 from escaping the locking bar 35. The stationary access jib 9 moreover comprises at least one locking bolt 37, for instance twenty parallel locking bolts located in the plane forming the bottom of the spanning beam element while extending longitudinally so as to project from the end of the stationary jib 9. Each locking bolt 37 is identical with the locking bolts 11, 12 and therefore comprises a locking head 38 coming in front of a locking head 16 of a corresponding locking bolt 12 of the central box 7 when the spanning beam element comprising the locking bolts 37 is assembled end to end with the other spanning beam element comprising the locking bolts 12. Such an assembly of elements of spanning beams is shown in part on figure 11 which shows that the locking bolts 37 are made fast to the locking bolts 12 by both jaw-like members 13, 14. Figure 8 illustrates two spanning beam elements assembled end to end wherein the movable jib 8 of the spanning beam element at the right with respect to this figure is

This is the replacement sheet

Date:

13 APR 1998

resting upon the stationary jib 9 of the left spanning beam element while being locked by the hook-shaped end portion 36 at the locking bar 35 of the stationary access jib 9 with the locking bolts 37 of the stationary access jib 9 being locked to the locking bolts 12 of the central box of the right spanning beam element by both jaw-like members 13, 14. In the assembled positions of two spanning beam elements, the movable jib 8 provides for the continuities of the top trackways of both spanning beam elements. The stationary jib 9 of each spanning beam element also comprises two jacks 39 fastened in the jib 9 at right angles to the bottom thereof and adapted to lift the movable jib 8 of another spanning beam element for unlocking the hook-shaped portion 36 from the locking bar 35 of the stationary access jib 9. The rod of the jack 39 is fully retracted into the stationary access jib 9 in the rest position and its end is acting below the movable access jib 8 for unlocking it from the stationary access jib 9.

Both elements of a spanning beam are assembled by their connecting arms forming braces in such a manner that the spanning beam may have available at each one of its ends, two movable and stationary access jibs 8 and 9, respectively, so that the spanning beams may be coupled to each other irrespective of their direction of presentation to each other. Each access jib has of course the same width as that of the corresponding central box and in the configuration of the spanning beam laid down or deposited over a breach, the opposite retractable jibs thereof are locked at their lower part to their supporting central box.

As shown on figure 7, both connecting arms forming braces 3c of both elements 3a, 3b of the intermediate spanning beam 3 have each one the shape of a U the top ends of which are pivotally fastened by pins 40 to both central boxes 7 of both spanning beam elements so that they may swing about these pins between a lowered position between both spanning beam elements

This is the last sheet

substantially perpendicular to the plane passing through the top trackways and an upwards swung or raised position substantially parallel to this plane. In the upwards swung or raised position both connecting arms 3c are automatically locked at the level of their bases to both boxes of both spanning beam elements by locking members 41 as explained further on.

Each spanning beam 2, 3, 4 moreover comprises two pairs of front and rear running rollers 42 fastened in confronting relationship to both internal side walls, which are confronting each other, of both spanning beam elements, respectively.

The system for depositing the spanning beams 2, 3, 4 comprises a longitudinal launching and depositing girder 43 extending in the rest or inoperative position substantially throughout the the whole length of the vehicle 1 while being accommodated for a great part in a longitudinal space or room defined between two overlying upper and intermediate spanning beams 2 and 3 and the upper connecting arms 2c of the spanning beam 2 and the connecting arms 3c of the spanning beam 3 in the lowered position, the latter thus allowing to increase the height of housing of the girder 43 between the connecting arms. The girder 43 comprises at its upper portion two side shoulders 44 forming two rails for guiding rollers 42 for the travel of each one of the spanning beams. The girder 43 is supported while being guided therein in longitudinal translatory motion by a supporting plate 45 which is fastened in pivoting relationship to the frame of the vehicle by a transverse pivot pin 46 so as to be capable of tilting about this pivot axis in the counter-clockwise direction for depositing the spanning beams. The guiding of the girder 43 is performed by a lower T-shaped tenon of the girder 43 engaging a mortise of complementary mating shape of the supporting plate 45. The girder 43 is driven in relation to the supporting plate 45 by a motor-reducing gear set 47 fastened underneath the supporting plate 45 driving two drive

This is the replacement sheet

Date: 13 APR 1998
97

pinions 48 meshing through the bottom of the support 45 with two parallel longitudinal toothed racks 49 fastened below the girder 43. The rocking or swinging of the supporting plate 45 is obtained by a control device 50 (see in particular figures 30 to 32) comprising a motor-reducing gear set 51 fastened to the frame 5 at the rear of the vehicles and driving a cross-shaft 52 by a drive belt 53-pulley 54 mechanism made fast to the shaft 52 both ends of which are kinematically connected to a transverse rotary shaft 55 supporting two winch drums 56 on which are winding up two parallel cables 57 for tilting the supporting plate 44. The cables 57 comprise two parallel longitudinal portions 57a passing over two return pulleys 58, respectively, fastened to the frame 5 so as to define two substantially vertical cable portions 57b passing on two control pulleys 59 secured to two yokes 60 themselves fastened underneath the supporting plate 45. Both cables 57 are extending beyond the pulleys 59 with two substantially vertical cable portions 57c the ends of which are fastened to both ends, respectively, of a transverse bar 61 forming a swinging member with a longitudinal central shaft rotatably mounted in a clevis 62 made fast to the frame 5. The shafts 52 and 55 are rotatably mounted in a yoke-shaped support 63 and the rotary driving of the shaft 55 by the shaft 52 may be carried out for instance by a system of pulleys secured to the ends of the shafts 52, 55 and two drive belts reeved on these pulleys. The tilting of the supporting plate 45 takes place when a spanning beam or at least two spanning beams assembled end to end are in a cantilever or overhang position with respect to this plate so as to exert a force tending to naturally rock the latter. In such a situation it then suffices to put the motor-reducing gear set 51 into operation so that the drums 56 be rotated in the direction of paying out or unwinding of the cables 57.

The system moreover comprises means for displacing one spanning beam or two spanning beams assembled end to

end in relation to the supporting girder 43. These means comprise two endless drive chains 64 arranged on either side of the girder 43 in symmetrical relation to the latter and each one mounted on two toothed wheels 65 fastened to both ends of the girder 43 with the lower side 64a of each chain 64 passing over three toothed guide wheels 66 arranged in a triangular configuration and rotatably mounted on the supporting plate 45. More specifically both toothed wheels 66 of a same side of the beam forming the base of the triangle are mounted for free rotation on a transverse support shaft projecting from the supporting plate 45 whereas the lower toothed pinion 66 forming the apex of this triangle is bound in rotation to a transverse shaft 67 rotatably mounted on support bearings 68 made fast to the supporting plate 45. The shaft 67 comprises a pulley 69 rotated by a drive pulley 70 connected to the pulley 69 by a belt (not shown) and made fast to the end of an output shaft of a motor-reducing gear set 71 made fast to the supporting plate 45. Thus the motor-reducing gear set 71 would simultaneously drive both lower toothed guide wheels 66 located on either side of the girder 43. The means for displacing the spanning beams in relation to the girder 43 also comprise two front pairs of retractable fork-shaped elements 72 made fast to both upper sides 64b, respectively, of both drive chains 64 and two rear pairs of retractable fork-like elements 72 also made fast to both upper sides 64b, respectively, of both chains 64. Both front pairs of fork-like elements 72 are adapted to grip two projecting finger-shaped portions 73 made fast to two spanning beam elements, respectively, and located plumb with two rollers 42 above which are located in a same vertical plane two forward handling shafts 74 arranged in confronting relationship with each other. Likewise both rear pairs of fork-shaped elements 72 are adapted to grip two projecting finger-like portions 73, respectively, made fast to two spanning beam elements, respectively, rearwards of the latter, plumb with two

running rollers 42 above which are respectively located two back handling shafts 74 arranged in confronting relationship with each other. Both pairs of fork-like elements 72 are simultaneously brought in the position of gripping the fingers 73 or in a retracted position by a mechanical mechanism operated by a control device fastened to the supporting plate 45. Each pair of fork-like elements consists of two brackets or blocks mounted in pivoting confronting relationship on two parallel pins, respectively, of links of a drive chain 64. Figure 27 shows one of the two brackets or blocks 72 swingably mounted at one of its ends onto a pin 75 for the connection of parallel links of the chain 64 and having its opposite end comprising a lower heel-like portion 76 caused to bear in the position of gripping the bracket 72 below the pin 77 for the connection of the links of the chain 64 adjacent to the pin 75. Thus each bracket or block 72 is movable between two parallel links of the chain 64. Advantageously a spiral spring 78 is provided on the pin 75 so as to urge each bracket 72 into the retracted position as shown by the arrow A. The aforesaid mechanical mechanism comprises two transverse shafts 79 rotatably mounted in the girder 43 and rotated together by two toothed wheels 80 meshing with each other and made fast to both shafts 79, respectively. At the end of each one of the two shafts 79 are fastened cams 80 located outside of the girder 43 and each one arranged underneath an arm 82 pivotally mounted at one of its ends on the girder 43. Each pivoting arm 82 is arranged below a bracket 72 so as to lift the bracket 72 to a position of gripping a finger 73 projecting above the plane passing through the upper sides 64b of the chains 64 under the action of the corresponding cam 81. One of the four cams 81 associated with both front and rear pairs of fork-like elements 72 is extended by an arm 83 the end of which pivotally engages a notch 84a of a plate 84 pivotally mounted about a shaft 85 on the girder 43. The plate 84 forms in a way a lever having one arm-like

This is the replacement sheet

Date: 13 APR 1946
97

portion acting upon the arm 83 and another lever arm-like portion the end of which is pivotally connected to a control rod 86 extending longitudinally of the beam 43. The rod 46 is also pivotally connected to the end of the other plate-shaped lever 84 associated with both other pairs of fork-like elements 72. Three control rollers 87 are fastened to the free ends, respectively, of three arms 88 pivotally fastened to the girder 43, these free ends being also connected pivotally to the rod 86. Thus the assembly consisting of the plates 84, the rod 86 and the arms 88 forms a deformable parallelogram so as to cause both plates 84 located on one single side of the girder 43 to simultaneously tilt from the position of retracting the brackets 72 shown at the left on figure 23 to the position of gripping the brackets 72 by the drive fingers 73, shown at the right of this figure. With each plate 84 is associated a spring 89 having one of its ends fastened to the girder 43 and its end opposite to the pivot point of the plate 84 fastened to the rod 86 so as to keep each plate 84 in both end positions of retracting and gripping the brackets 72, respectively. The device for controlling the mechanism for displacing the brackets 72 comprises an element such as a vertical plate 90 fastened to the supporting plate 45 and vertically movable between a lower position and an upper position so as to act upon the rollers 87 and thus cause the desired tilting of the plate 84 to the retracted position or to the position of gripping the brackets 72. More specifically the plate 90 is arranged in the same vertical plane as the rollers 87 and has its two ends shaped as isosceles triangles the vertices of which are longitudinally aligned. Thus in the lower position of the plate 90, the upper side of either one of the triangles is acting to push one of the rollers 87 upwards and therefore to retract the brackets 72 whereas in the upper position of the plate 90, the lower side of either one of the triangles is acting to push one of the rollers 87 downwards and therefore to bring the brackets 72 into the

This is the replacement sheet

Date: 13 APR 1928

position of gripping the fingers 73. The vertical displacement of the plate 90 is provided by two parallel arms 91 pivotally connected with their ends to the plate 90 and to the supporting plate 45 and a jack 92 with a double rod having their ends pivotally connected to the point of pivotal connection of one of the arms 91 to the supporting plate 95 and to the point of pivotal connection of the other arm 91 to the plate 90, respectively.

The system also comprises two operated hooks 93 for locking both confronting handling shafts 74, respectively, of both spanning beam elements of a spanning beam and fastened to the ends of two drive chains 94 arranged in symmetrical relation to the longitudinal center line axis of the girder 43 and passing over two parallel toothed wheels 95, respectively, rotatably mounted at the end of the girder 43 while being perpendicular with respect to the bottom of the latter. Both toothed wheels 95 are bound in rotation to a transverse shaft 96 rotatably mounted between two side walls 43a of the girder 43. Two pulleys 97 parallel to the toothed wheels 95 are also bound in rotation to the shaft 96 and driven by two drive pulleys 98 kinematically connected to the pulleys 97 by two belts 99. Both drive pulleys 98 are each one made fast to an output shaft of a reducing mechanism 100 fastened to the girder 43. Each control chain 94 passes below a toothed guide pinion 101 mounted for free rotation at the end of the corresponding output shaft of the reducing mechanism 100 and has its free end connected to the end of one compensation spring 102 having its opposite end fastened to the bottom of the girder 43. The input shaft of the reducing mechanism 100 is driven by a first reducing mechanism with pulleys 103, 104 kinematically connected by a belt (not referred to), the shaft 105 driving the pinion 104 extending through the bottom of the girder 43 and having at its lower end a rotary coupling plate 106 capable of being driven by a hydraulic motor 107 as will

be explained hereinafter. The drive shaft 104 also drives an upper pulley 108 of the same diameter as the diameter of the pulley 104 kinematically connected by a drive belt 109 to a pulley 110 made fast to the end of a rotary shaft 111 having its lower end made fast to a rotary coupling plate 112 like the plate 106. The shaft 111 drives a second pulley 113 like the pulley 110 coupled by a belt 114 to a pulley 115 made fast to a rotary drive shaft 116 extending through the bottom of the girder 43 and the lower end of which is made fast to a rotary coupling plate 117 identical with the plates 106 and 112. As shown on figure 26, the girder 43 may assume with respect to the motor 107 fastened underneath the supporting plate 45 three distinct stationary positions a, b, c at each one of which the motor 107 is removably coupled to the corresponding plates 106, 112 and 117. At each one of the positions a, b, c, one of the rollers 87 is lying in the plane of the plate 90 in order that the latter may lock or unlock the fingers 73 to or from the fork-like elements 72. Figure 26 shows the plate 112 for driving the shaft 113 ready to be coupled for rotation to an output plate of the motor 107. The output plate of the motor 107 is of the type comprising fingers or claws engaging cavities of shapes complementary of or mating with that of the plate 106, 112 or 117. This output plate is mechanically coupled to a bar with a toothed rack 118 axially guided in a direction transverse to the supporting plate 45 and meshing with a toothed segment 119 rotated about a shaft 120 fastened to the plate 45 by a control jack 121 and a lever arm 122. The shaft with the toothed rack 118 is shown in inoperative position of disengagement of the output plate of the motor 107 from the coupling plate 112.

Each hook 93 comprises a latch 93a for locking one handling shaft 74 constantly urged back into unlocking position by a spring 123. As shown on figures 23 and 24, both hooks 93 may assume three positions X, Y and Z. In the position Z of depositing spanning beams, both

This is the replacement sheet

Date: 13 APR 1998

handling shafts 74 are accommodated within both hooks 93, respectively, without being locked by the latches 93a. Each end of the side wall 43a of the girder 43 has a flange 43b shaped as a cam co-operating with the end of the latch 93a of the hook 93 in the same plane as the side wall 43a so as to bring the latch 93a into the position of unlocking a handling shaft 74 when the hook 93 is in the position X and this under the biasing action of the spring 123. In the position Y, the latch 93a of each hook 93 assumes the position of locking a handling shaft 74 since the flange 43a is acting as a cam pushing the latch 93a against the return force of the spring 123.

Figures 33 to 36 show the device for raising both connecting arms 3c of the intermediate spanning beam 3. This device comprises a raising table 124 assuming in the position of conveyance of the spanning beams, the lowered position shown on figure 33 in which the ends of both connecting arms 3c are resting upon the table 124. The latter is fastened to the frame 5 of the vehicle through the medium of pivotally connected arms 125 perpendicular to the frame 5 and defining a parallelogram deformable under the action of a jack-like member 126. More specifically both lower arms of the deformable parallelogram are extended by portions 125a fastened pivotally to the frame 5 whereas the upper arms of these parallelograms are extended by portions 125b pivotally fastened below the table 124. The table 124 consists of a frame 124a supporting for sliding motion along the longitudinal center line axis of the vehicle two small tables 124b connected to each other by two parallel arms 127 pivotally connected on the one hand to both small tables 124b and on the other hand to both ends of a central lever 128 pivotally mounted at its center about a pin perpendicular to the frame 5 of the vehicle. The arms 127 and the lever 128 allow both small tables 124b to move away from each other as the table 124 is raised so that the ends of the connecting arms 3c be constantly

This is the replacement sheet

Date: 13 APR 1997

bearing upon both small tables 124b until they reach their raised position parallel to the frame 5 of the vehicle. In the upper position of the lifting table 124, the connecting arms 3c are locked to the spanning beam elements by locking members 41. Such members may consist of a hook pivotally mounted on the corresponding spanning beam element and operated by a jack mounted on a small table 124b so as to rock the hook into the position of locking a locking pin made fast to the corresponding connecting arm 3c.

The system also comprises a casing 129 located in the longitudinal center line axis of the vehicle at the rear of the latter and usable as a support for the back end of the girder 43 in the transport position of the spanning beams and a jack 103 mounted on the frame 5 of the vehicle just rearwards of the cabin 6 along the longitudinal center line axis of the vehicle and adapted in particular to lift the girder-upper spanning beam assembly at the beginning of the launch of the upper spanning beam.

The system at last comprises a device forming an antirocking foot of the vehicle located forward thereof and comprising a plate 131 pivotally connected to both free ends of two jack rods 132 pivotally connected to the frame of the vehicle and capable of being folded back into an inoperative position stowed within the vehicle as shown on figure 1 and two pairs of jacks 133 fastened to the frame 5 of the vehicle in symmetrical relation to the longitudinal center line axis of the latter so as to lift the spanning beams above the frame 5.

The principle of depositing three spanning beams assembled end to end which already appears in part from the above description of the system will be set forth in detail with reference to figures 37A to 37P.

The vehicle 1 conveys the three overlying spanning beams to the place where the breach B to be cleared is located and is approaching the latter until reaching the location shown on figure 37A. In the initial conditions,

the upper spanning beam 2 is connected to both chains 64 by the fork-like elements 72 enclosing the finger-shaped portions 73 of the upper spanning beam elements 2. The vehicle 1 is thus located in front of the breach in the transport position shown on figure 1. The device forming the anti-rocking foot is extended so that the plate 131 bears upon the ground and the jack 130 is activated for slightly lifting the girder 43-upper spanning beam 2 assembly from the supporting box 122 so as to release the upper spanning beam from the intermediate spanning beam 3. The motor-reducing gear set 47 is activated so as to displace in relation to the supporting plate 45 the unitary assembly formed of the girder 43 and of the upper spanning beam 2 to the most overhanging position of the girder forward of the vehicle, in which position the hydraulic motor 107 has its output shaft mechanically coupled to the plate 117 driving the shaft 116 supporting the pulley 115. The system is thus in the position shown on figure 37A. As shown on figure 37B the upper spanning beam 2 is longitudinally displaced on the girder 43 by energizing the motor-reducing gear set 71 driving both drive chains 64. The transfer of the spanning beam 2 is effected until both front handling shafts 74 of the spanning beam 2 are engaging both hooks 93, respectively, in the position X which are brought into the position Y of locking the handling shafts 74 by the motor-reducing gear set 100 energized by the hydraulic motor 107 at the same time as the upper spanning beam 2 is advanced over a small distance forwards with respect to the girder 43. Then the jack 126 controlling the table 124 is actuated so that the table 124 lifts both connecting arms 30 of the intermediate spanning beam 3 up to their position of locking to the corresponding spanning beam elements, in which they are locked. Once the table 124 has again been lowered into inoperative position, both pairs of side jacks 133 are energized so as to lift both overlying intermediate and lower spanning beams 3 and 4 until the intermediate spanning beam 3 be substantially on the same

This is the replacement sheet

Date: 13 APR 1997

level as the upper spanning beam 2 and the fork-like elements 72 are brought into the inoperative retracted position by deforming the deformable parallelogram consisting of the plates 84, the rod 86 and the arms 88 by the plate 90 acting upon the corresponding roller 87. The motor 107 is disengaged from the plate 117 driving the shaft 116.

As shown on figure 37C, the girder 43 and the upper spanning beam 2 which is connected thereto by the hooks 93 are displaced in relation to the supporting plate 45 rearwards to the position wherein the motor 107 is coupled to the plate 112 driving the shaft 111 with the back portion of the girder 43 inserting itself between both intermediate and lower spanning beams 3 and 4. In this position the plate 90 is lowered to lock the hook-like elements 72 to both finger-shaped front portions 73, respectively, of the intermediate spanning beam 3. The motor-reducing gear set 71 is energized so that the drive chains 64 are displacing the intermediate spanning beam 3 towards the rear end of the upper spanning beam 2. Initially the raisable rear access jib of the spanning beam 2 and the raisable front access jib of the spanning beam 3 are unlocked. While the intermediate spanning beam 3 is moving towards the upper spanning beam 2, the jacks 39 for lifting the access jibs are energized for lifting the raisable access jibs 8. The access jib 8 of the upper spanning beam 2 engages with its end over the corresponding stationary jib 9 of the intermediate spanning beam 3 whereas the jib 8 of the intermediate spanning beam 3 engages with its end upon the stationary jib of the upper spanning beam 2 and the hook-like portions 36 of the liftable jibs 8 are engaging transverse bars 35, respectively, of the stationary jibs 9. Simultaneously the locking shafts 37 of the stationary jibs 39 are locked to the locking shafts 12 by jaw-like members 13 by rotating through the corresponding hydraulic motor (not shown) and the guiding mechanisms 24, 27 the control rods 24 about their longitudinal

This is the replacement sheet

Date: 13 APR 1997

center line axes. This hydraulic motor is fastened underneath the supporting plate 45 and is removably coupled to the guiding mechanism 27 in the same manner as the motor 107. The hydraulic motor for operating the jaw-like members 13 is then withdrawn from the guiding mechanism 27 and both assembled spanning beams 2, 3 are withdrawn from the hooks 93 by moving back through the drive chains 64 both assembled spanning beams and by simultaneously bringing both hooks 93 from the state Y to the state X for unlocking and disengaging the hooks 93 from both front handling shafts 74 of the upper spanning beam 2. The hooks 93 are then brought into the position Z. Figur 37D shows both spanning beams 2, 3 assembled end to end.

As shown on figure 37E, the assembled spanning beams 2, 3 are displaced in relation to the girder 43 by the drive chains 64 into an overhang position in relation to the girder 43 such that the front handling shafts 74 of the intermediate spanning beam 3 are inserted into the hooks 73 brought from the position Z to the position X and the spanning beams 2, 3 are moved forwards with respect to the girder 43 with a concurrent displacement of the hooks 93 from the position X to the position Y for their locking the handling shafts 74 of the intermediate spanning beam 3. Then the fork-like elements 72 are brought into the retracted position so as to disconnect the fingers 73 of the intermediate spanning beam from the drive chains 94 and the motor 107 is disconnected from the plate 112 driving the shaft 111.

In order to disengage the rear portion of the girder 43 from the lower spanning beam 4, the girder 43 together with the assembled spanning beams 2, 3 is brought into its most overhanging position forward of the vehicle as shown on figure 37F. Then the side jacks 133 are operated so as to lift the upper spanning beam 4 substantially to the same level as the assembled spanning beams 2, 3 (figure 37G). Figure 37H shows that the girder 43 at the same time as the assembled spanning beams 2, 3

has been moved backwards in relation to the supporting plate 45 into the position wherein the motor 107 is again coupled to the plate 112 driving the shaft 111. In this position the fork-like elements 72 are brought plumb with the finger-like front parts 73 of the lower spanning beam 4 and are brought by the plate 90 into the operative position of gripping the finger-like parts 73. The drive chains 64 are controlled so as to move the lower spanning beam 4 backwards of the intermediate spanning beam 3 and the jacks 39 for lifting the movable jibs 8 are energized to allow the endwise assembly of the lower spanning beam 4 to the intermediate spanning beam 3 in the same manner as for the endwise assembly of the spanning beams 2 and 3 as previously explained, it being understood that initially the movable jibs 8 of the intermediate and lower spanning beams, respectively, are unlocked. Once the spanning beams have been assembled as shown on figure 37I, the lifting jacks 39 are brought into the inoperative position, the motor controlling the jaw-like members 13 is disengaged from the reducing mechanism 27, the jacks 133 for lifting the spanning beams are brought into an inoperative position and the motor 107 is withdrawn from the plate 112 driving the shaft 111.

As shown on figure 37J, the girder 43 is moved to the most overhanging position forward of the supporting plate 45 and the motor 107 is coupled to the plate 117 driving the shaft 116. The spanning beams 2, 3, 4 are moved backwards with respect to the girder 43 by the drive chains 64 with the simultaneous displacement of the hooks 93 from the position Y to the position X for disengaging the handling shafts 74 from the intermediate spanning beam 3, the hooks 93 being then brought into the position Z. Figure 37K shows that the assembled spanning beams 2, 3, 4 are moved in relation to the girder 43 by the drive chains 64 to an overhanging position wherein the front handling shafts 74 of the lower spanning beam 4 are locked within the hooks 93 in the manner already previously described. Then the fork-like elements 72

This is the replacement sheet

Date: 13 APR 1997

connecting the lower spanning beam 4 to the drive chains 64 are brought into the retracted position by the plate 90 and these fork-like elements 72 are brought plumb with the rear finger-like parts 73 of the lower spanning beam 4 for gripping the latter. Once the lower spanning beam 4 has been disconnected from the drive chains 64, the assembled spanning beams 2, 3, 4 are moved rearwards with respect to the girder 43 by the drive chains 64 with a simultaneous displacement of the hooks from the position Y to the position X for disengaging the handling shafts 74 of the lower spanning beam from the hooks 93 which are retained in the position X.

The motor-reducing gear set 51 is put into operation so as to drive the drums 56 in the direction of paying out or unwinding the cables 57 thereby causing the tilting of the supporting plate 45 and therefore of the girder 43-spanning beams 2, 3, 4 assembly so as to lay the end of the upper spanning beam 2 down upon the bank opposite to the vehicle. As shown on figure 37L, the whole of the spanning beams is disengaged from the girder 43 so as to form an angle of the spanning beams with respect to the girder of about 3° . The motor 107 is then disengaged from the plate 112 driving the shaft 111.

The girder 43 is then moved backwards with respect to the supporting plate 45 to a relative position such that the motor 107 may be coupled to the plate 106 driving the shaft 104 and at the same time the spanning beams are displaced with respect to the girder 43 by the drive chains 64 travelling in a translatory motion over the toothed wheels 65, 66 to a position such that the rear handling shafts 72 of the lower spanning beam 4 are engaging and locking themselves into the hooks 93 successively at the positions X and Y, the hooks 93 being then brought to the position Z. The rear finger-like parts 73 of the lower spanning beam 4 are automatically disengaging from the fork-like elements 72 when the hooks 93 are in the position Y as this besides is shown on figure 23. The drive chains 64 are operated so as to

bring the fork-like elements 72, being still in the operative gripping position, back to their initial position of figure 37A.

From the position shown on figure 37M, the motor-reducing gear set 51 is again put in operation to wind the cables 57 up onto the drums 56 and thus to bring the whole of the supporting plate 45 and the girder 43 back to the horizontal position as shown on figure 37N. In this depositing position the girder 43 has an overhang with respect to the vehicle relatively reduced by about the quarter of its full length. Then the motor 107 is energized for causing the hooks 93 to move downwards and thus for depositing the assembled spanning beams 2, 3, 4 over the breach B as shown on figure 37-O. The hooks 93 are then disengaged from the handling shafts 74 of the lower spanning beam 4 and the motor-reducing gear set 51 would bring the hooks 93 back to their position X. The motor 107 is disengaged from the plate 106 driving the shaft 105 and the girder 43 is brought back to the initial transport position. The vehicle may then clear the breach B by passing on the bridge provided by the assembled spanning beams 2, 3, 4 to recover the spanning beams on the opposite bank. The picking-up again of the spanning beams from the ground is of course effected according to the different steps considered when starting from figure 37-0 and proceeding to figure 37A.

Figures 38A to 38H show the steps for depositing one single spanning beam, the upper spanning beam 2 in the present case.

From the transport position shown on figure 38A, the whole of the girder 43 and spanning beam 2 connected to the latter by the fork-like elements 72 is displaced in relation to the supporting plate 45 to an overhang or cantilever position forward of the vehicle in which the motor 107 is coupled to the plate 112 driving the shaft 111.

The spanning beam 2 is displaced in relation to the girder 43 from the position shown on figure 38B to

the position shown on figure 38C in which the front handling shafts 74 of the spanning beam 2 are engaging and are locked themselves within the hooks 93 as already explained previously. The motor 107 is disengaged from the plate 112 driving the shaft 111.

Then as shown on figure 38D, the girder 43 is displaced in relation to the supporting plate 45 to its most cantilever or overhang position forward of the vehicle in which the motor 107 is coupled to the plate 117 driving the shaft 116.

Prior to the tilting of the supporting plate 45-girder 43 system, the handling shafts 74 of the spanning beam 2 are unlocked from the hooks 93 in the manner already set forth previously and the hooks 93 are brought to the position X. Figure 38E shows the tilting of the girder 43 and figure 38F shows how the end of the spanning beam 2 is caused to bear on the bank opposite to the vehicle with the spanning beam 2 defining an angle of about 3° with respect to the girder 43.

The girder 43 is then moved backwards in relation to the supporting plate 45 to a position identical with that of figure 37M, thereby displacing the chains 64 in a translatory motion on the toothed wheels 65, 66 so as to move the spanning beam 2 in relation to the girder 43 until the rear finger-like parts of the spanning beam 2 are automatically disengaging themselves from the fork-like elements 72 with the handling shafts 74 engaging and locking themselves in the hooks 93 which are brought to the position Z.

As shown on figure 38H, the whole of the supporting plate 45 and girder 43 is brought back to the horizontal position by the motor-reducing gear set 51 and the motor 107 is energized for lowering the hooks 93 hence for laying the spanning beam 2 down over the breach B. The various steps depicted on figures 37-O and 37P are carried out in order that the vehicle passes over the breach B and may then take up the spanning beam according to the different steps considered when starting from

This is the replacement sheet

Date: 13 FEB 1957

figure 38H and proceeding to figure 38A.

The liftable jibs 8 of the spanning beam 2 are of course initially locked before the start of the steps of depositing thereof.

The steps of assembling and of depositing two spanning beams coupled end to end are obviously resulting from the steps depicted on figures 37A to 37P and need therefore not to be described in detail.

The system according to the invention described hereinabove is of a relatively simple construction and operation in comparison with the systems known until now and especially would deposit one or several assembled spanning beams in a minimum time.

.

This is the replacement sheet

Date: 13 APR 1997

Claims

1. A spanning beam structure adapted in particular to the clearing of breaches by vehicles such as armoured vehicles of the Engineer Corps, formed of at least one spanning beam element (2a, 3a, 4a ; 2b, 3b, 4b) comprising a rigid central box (7) with an upper trackway and two access jibs (8, 9) assembled to both ends, respectively, of the central box (7), at least one (8) of the access jibs (8, 9) being raisable and fastened to the central (7) box by a transverse pivot pin (10) and unlockable locking means, characterized in that the locking means comprise at least one locking shaft (11, 12) made fast to the liftable access jib (8) and to the central box (7), respectively, while extending longitudinally of the central box (7) along the same axis in the locked position of the access jib (8) and two jaw-like members (13) gripping round two confronting heads (15, 16) of both locking shafts (11, 12).

2. A spanning beam structure according to claim 1, characterized in that the pivot pin (10) of said access jib (8) is located at the upper part of the central box (7) and the locking shafts (11, 12) are approximately located at the bottoms of the access jibs (8) and of the central box (7) with both jaw-like members (13) accommodated in a lower transverse space (7) defined between the access jib (8) and the central box (7).

3. A spanning beam structure according to claim 2, characterized in that it comprises at least one retractable pin (18) for taking up shearing forces exerted upon the locking shafts (11, 12) during the passage of vehicles on said trackway and extending longitudinally into two coaxial holes (19, 20) of the raisable access jib (8) and of the central box (7), respectively.

4. A spanning beam structure according to claim 3, characterized in that the said pin (18) is retracted



THIS IS THE ORIGINAL SHEET

Dec: 11 3 AM 1937

from the hole (19) of the access jib (8) by a control rod (24) having a threaded end screwed into the pin (18) and mounted for rotation about its axis into a block (21) made fast to the central box (7) so as to fully retract the pin (18) into the hole (20) of the central box formed in the block (21) in coaxial relation to the control rod (24) upon the unlocking of the raisable jib.

5. A spanning beam structure according to claim 4, characterized in that the both jaw-like members (13) are operated by a mechanism mechanically connected to the control rod (24) and comprising a plate (28) with a guided longitudinal motion controlled by the control rod (24) and two studs (33) made fast to both jaw-like members (13), respectively, inserted into two oblique grooves (32), respectively, of the plate (28) so that the movement controlled by the latter is moving both jaw-like members (13) towards or away from each other.

6. A spanning beam structure according to claim 5, characterized in that the control rod (24) comprises a transverse pin (30) made fast to the plate (28) through a longitudinal groove (31) formed in a wall of said block (21) and the plate (28) is made fast to the block (21) preferably by two L-shaped parallel guide rails (29).

7. A spanning beam structure according to any one of the foregoing claims characterized in that it comprises at least one shaft (34) for guiding the displacement moving both jaw-like members (13) away from or towards each other and made fast to said central box (7).

8. A spanning beam structure according to any one of the foregoing claims characterized in that it comprises a reducing mechanism (24, 27) mechanically connected to the control means of the jaw-like members (13) and made fast to the bottom of the central box (7) so as to be removably coupled to an external drive motor.

9. A spanning beam structure according to any one of the foregoing claims characterized in that the other access jib (9) is stationary and comprises a transverse



This is the replacement sheet

Date: _____

bar (35) for locking one hook-shaped portion (36) at the end of a movable jib (8) unlocked from another similar spanning beam element, a member (39) for unlocking the hook-shaped portion (36) of the transverse bar (35) and consisting preferably of a jack made fast to the stationary access jib (9) and the jack rod of which is lifting the movable access jib (8) of the other spanning beam element, and at least one locking shaft (38) extending longitudinally of the central box (7) and capable of being locked by two jaw-like members (13) to the locking shaft (12) of the central box (7) of the other spanning beam element when the movable access jib (8) of the latter is locked to the transverse bar (35).

10. A spanning beam structure according to claims 1 to 9, characterized in that it comprises two spanning beam elements with parallel trackways and the central boxes (7) of which are connected to each other by two connecting arms (2c; 3c; 4c) forming braces whereas two access jibs forward or rearward of the structure are stationary (9) and raisable (8), respectively.

11. A system for transferring onto a road vehicle such as a truck at least two bridging spanning beams (2, 3, 4) superimposed on a frame (5) of the vehicle and capable of being assembled end to end and for depositing each one of the spanning beams or both spanning beams assembled end to end over a breach to be cleared, each spanning beam having such a structure as defined in claims 1 to 10 and of the type comprising a girder for supporting and launching (43) a spanning beam or assembled spanning beams displaceable in relation to the vehicle (1) towards an overhang position forward of the latter, means for displacing the spanning beam or assembled spanning beams in relation to the girder (43) to an overhang position forward of the girder (43) and a plate (45) supporting in guided relationship the supporting and launching girder (43) and tilting in relation to the vehicle (1) to allow the depositing of the spanning beam or assembled spanning beams,



This is the replacement sheet

Date: 13 APR 1997

characterized in that the improvement consists in that it comprises at least one operated hook (93) for depositing the spanning beam or assembled spanning beams, mounted at the end of the supporting and launching girder (43) and capable of assuming a relative position for supporting one handling shaft (74) of the spanning beam or assembled spanning beams located opposite to the end of the spanning beam or assembled spanning beams bearing upon that bank of the breach to be cleared which is opposite to the vehicle, by tilting of the supporting plate (45), from which supporting position the hook (93) is moved downwards for depositing the other end of the spanning beam or assembled spanning beams upon that bank of the breach which is near the vehicle (1).

12. A system according to claim 11, characterized in that the overhang position of the supporting and launching girder (43) forward of the vehicle (1) upon the depositing of the spanning beam or assembled spanning beams is relatively reduced by about one quarter of its full length.

13. A system according to claim 11 or 12, characterized in that means for displacing the spanning beam or assembled spanning beams in relation to said girder (43) comprise two endless drive chains (64) arranged on either side of the girder (43) and each one mounted on two toothed wheels (65) fastened to the ends of the girder (43) with the lower side (64a) of each drive chain (64) passing on three toothed guide wheels arranged in a triangular configuration (66) and made fast to said supporting plate (45); a motor-reducing gear set (71) for simultaneously driving two of the guide pinions (66) of both drive chains (64), respectively, and fastened to the supporting plate (45); and at least two pairs of retractable fork-like elements (72) fastened to both drive chains, (64) respectively, in symmetrical relation to the longitudinal axis of the girder (43), each pair of fork-

This is the replacement sheet



Date: 13 APR 1997


like elements (72) gripping one corresponding projecting portion (73) of the central box (7) of one spanning beam located plumb with a handling shaft underneath the latter.

14. A system according to claim 11, characterized in that the fork-like elements (72) are simultaneously brought into the position of gripping said projecting portion (73) or into the retracted position by a mechanical mechanism operated by a control device fastened to said supporting and tilting plate (45).

15. A system according to claim 14, characterized in that each pair of fork-like elements (72) comprise two brackets (72) mounted opposite to each other in pivotal relationship onto two parallel pins (75, 77), respectively, of links of one drive chain (64) and said mechanism comprises two transverse shafts (79) mounted for rotation within said girder (43), rotated together by two toothed wheels meshing (80) with each other and made fast with both transverse shafts (79), respectively, each one supporting at their ends to outer cams (81) pushing two arms (82), respectively, pivotally mounted on the girder (43) below the upper sides (64b) of both drive chains (64) so as to lift the corresponding brackets (72) to a position projecting above the plane passing through the upper sides (64b) of both drive chains (64) and a plate (84) pivotally mounted on one single side of the girder (43) and having one of its ends pivotally connected to a control rod (86) and its opposite end comprising a notch in which is pivotally inserted the end of one pivoting arm (83) of one of the thrust cams (81), the pivoting plate (84) being thus capable of tilting between an operative position locking the brackets (72) in their gripping position and an inoperative retracted position of the brackets (72).

16. A system according to claim 14 or 15, characterized in that the control device comprises an element such as a plate (90) perpendicular to the

This is the replacement sheet



Date: _____

supporting plate (45) and vertically movable between a lower position and an upper position and acting in the stationary position of the girder (43) in relation to the supporting plate (45) upon a roller (87) made fast to the end of one arm pivoting (88) in relation to the girder (43) and forming with the control rod (86) and the pivoting plate formed with a notch (84) a parallelogram deformable between both aforesaid tilting positions of the pivoting plate (84).

17. A system according to one of claims 11 to 16, characterized in that the said supporting and tilting plate (45) is located forward of the vehicle and said girder (43) has its portion rearwards of the supporting and tilting plate (45), in the rest or inoperative position of the girder (43), accommodated between two superimposed spanning beams and the connecting arms (2c, 3c) of both spanning beams (2, 3) with both connecting arms of the lower spanning beam (3) having each one a U-shaped configuration pivoted with its ends to both inner side walls, respectively, of both central boxes (7) of both spanning beam elements and capable of being raised simultaneously to a position substantially parallel to the frame (5) of the vehicle, wherein they may be locked to their lower spanning beam (3), both U-shaped (3c) connecting arms thus increasing in the lowered position the room for housing the beam (43).

18. A system according to claim 17, characterized in that it comprises means for raising (124) the connecting arms (3c) of the elements of the lower spanning beam, consisting of a lifting table mounted on the frame (5) of the vehicle so as to assume a lowered inoperative position and capable of being lifted from its inoperative position after withdrawal of the girder from above the lower spanning beam (3) so as to act upon the lower ends of the U-shaped connecting arms (3c) and to move them away from each other until they reach their position of locking to the lower spanning beam (3).

THIS IS THE REPRODUCTION SHEET



* C L M S *

13 APR 1997

19. A system according to claim 11, characterized in that it comprises two hooks for supporting (93) two handling shafts (74), respectively, made fast in confronting relationship to two spanning beam elements, respectively, whereas both hooks (93) are fastened to the ends of two drive chains (94) mounted onto parallel toothed wheels (95), respectively, at the end of the girder (43) and driven by a reducing mechanism (100) fastened to the girder (43) and operated by a preferably hydraulic motor (107) fastened to the supporting and tilting plate (45) and coupled through a removable connection to the reducing mechanism (100) at determined fixed positions (a, b, c) of the girder (43) in relation to the supporting and tilting plate (45).

20. A system according to claim 19, characterized in that each aforesaid hook (93) comprises a latch (93a) for locking one handling shaft and arranged to co-operate with the upper edge of the corresponding side wall (43b) of the girder (43) upon a controlled displacement of the hook (93) in the direction reverse from that of downward motion of the hook (93) so as to be unlocked by the action of an elastic member (123) in a relative position of the hook (93) receiving the corresponding handling shaft (74) whereas the hook (93) is then displaced over a relatively small stroke simultaneously with the spanning beam in the lowering direction of the hook so as to automatically bring the latch (93a) into the position of locking of the handling shaft (74) within the hook (93).

21. A system according to claim 20, characterized in that the latch (93a) of each hook (93) is unlocked by the action of said elastic member (123) in said hook-supporting position (93).

22. A system according to one of claims 11 to 21, characterized in that the girder (43) is displaced in translatory motion in the longitudinal direction in relation to the supporting and tilting plate (45) by a motor-reducing gear set (47) fastened underneath the

This is the replacement sheet



Date:

13 APR 1997

said plate (45) and driving at least one drive pinion (48) meshing with a longitudinal toothed rack (49) fastened below the girder (43), which comprises at the upper portion trackways forming rails for guiding the spanning beams (2, 3, 4) upon which are moving rollers for the travel (42) of the spanning beams (2, 3, 4).

23. A system according to one of claims 11 to 22, characterized in that it comprises a device for controlling the tilting of the supporting plate (45), comprising two side cables (57) passing over two pulleys (59), respectively, made fast to the supporting plate (45) rearwards of the tilting shaft of said plate (45) while defining two sides (57c) substantially perpendicular to the frame (5), anchored to the latter and two parallel sides (57a) extending along the frame (5) and winding up onto two drums (56), respectively, of a winch driven by a motor-reducing gear set (51) made fast to the frame (5) rearwards of the vehicle (1).

24. A system according to claim 23, characterized in that both perpendicular sides (57c) have their ends connected to a swinging member (61) shaped as a bar parallel to the frame (5) and pivotally mounted about a longitudinal central shaft made fast to a yoke (62) fastened to the frame (5) whereas the parallel sides (57a) are extending back to the pulleys for tilting (59) the supporting plate (45) through the medium of guide pulleys (58).

25. A system according to one of claims 11 to 24, characterized in that it comprises two pairs of jacks (133) arranged on either side of the vehicle (1) so as to lift the lower spanning beam (3) after disengagement of the upper spanning beam (2) on said girder (43) at the level of the upper spanning beam (2) with a view to couple it to the latter.

26. A system according to one of claims 11 to 25, characterized in that each spanning beam (2, 3, 4) comprises two pairs of front and rear handling shafts

THIS IS THE REPRODUCTION



* C L M S *

(74), respectively, two handling shafts (74) of each pair being fastened in confronting relationship to both central boxes (7), respectively, of two spanning beam elements at the upper portion thereof.

27. A system according to one of claims 11 to 26 characterized in that it comprises a preferably hydraulic motor fastened to the supporting and tilting plate (45) and adapted to be mechanically coupled removably to a reducing mechanism (24, 27) at the bottom of one spanning beam (2, 3, 4) at a determined position of the girder (43) - spanning beam (2, 3, 4) assembly in relation to the supporting and tilting plate (45).

28. A system according to one of claims 11 to 27, characterized in that for the assembling end to end of two spanning beams and their depositing over a breach, the lower spanning beam (2) is initially made fast to both drive chains (64) by two pairs of fork-like elements (72), the girder (43) and the upper spanning beam (2) are displaced together with respect to the supporting and tilting plate (45) by the motor-reducing gear set (47) until reaching a relative position of most overhang forward of the vehicle (1) in which the spanning beam (2) is displaced in relation to the girder (43) towards the front of the vehicle by both drive chains (64) until both handling shafts (74) are engaging both hooks (93), respectively, in the unlocked position of their respective latches (93a), both hooks (93) are then operated by their drive chain (64) to assume the relative position of locking by the latch (93a) of both handling shafts (74) of the upper spanning beam (2), both pairs of fork-like elements (72) are unlocked from the upper spanning beam (2) and the lifting table (124) is actuated for raising the connecting arms (3c) of the lower spanning beam (3) and for locking them to the latter whereas both pairs of side jacks (133) are lifting the lower spanning beam (3) and for locking them to the latter whereas both pairs of side jacks are lifting the lower spanning beam to the same level as the

This is the replacement sheet



Date: 13 APR 1997

upper spanning beam (2), the girder (43) and the upper spanning beam (2) are displaced together backwards to a position of the girder (43) in relation to the supporting and tilting plate (45) such that both pairs of fork-like elements (72) are actuated to lock the front part of the lower spanning beam (3) to both drive chains (64) which is controlled to displace the lower spanning beam (3) in relation to the girder (43) rearwards of the upper spanning beam (2) with both raisable access jibs (8) of both lower (3) and upper (2) spanning beams, respectively, which are initially unlocked, being raised by their respective lifting jacks (39) so that the hook-shaped ends (36) of the lifted jibs (8) are locking themselves to the transverse bars (35) of both stationary jibs (9) of the upper (2) and lower (3) spanning beams, respectively, and jaw-like members (13) are operated to lock end to end the locking shafts (38) of the stationary jibs (9) to the locking shafts (12) of the central boxes (7) of the upper (2) and lower (3) spanning beams.

29. A system according to claim 28, characterized in that the girder (43) and both assembled spanning beams (2, 3) are displaced together in relation to the supporting and tilting plate (45) to the position of greatest overhang of the girder (43), in which both spanning beams are moved rearwards in relation to the girder (43) by operating both drive chains (64) and both hooks (93) are concurrently brought into the position of unlocking of the latches (93a) thereby to disengage the handling shafts (74) from the upper spanning beam (2), both assembled spanning beams (2, 3) are then displaced in relation to the girder (43) to a position in which the front handling shafts (74) of the lower spanning beam (3) are locked to both hooks (93), the drive chains (64) are operated after unlocking of the fork-like elements (72) from the front part of the lower spanning beam (3) to bring the fork-like elements (72) into the locking position rearwards of the lower spanning beam



This is the replacement sheet

Date: 13 APR 1997

(3), both spanning beams (2, 3) are moved backwards with respect to the girder (43) by both drive chains (64) and both hooks (93) are operated to disengage the front handling shafts (74) of the lower spanning beam (3) from both hooks (93), the supporting plated (45) is tilted to lay the free end of the assembled spanning beams (2, 3) down onto the bank opposite to the vehicle (1), the girder (43) is brought into the rear position for depositing the spanning beams (2, 3) which are displaced in relation to the girder (43) to a position where the rear handling shafts (74) of the lower spanning beam (3) are inserted into both hooks (93) which are operated to provide for the depositing of the assembled spanning beams (2, 3) over the bank towards the vehicle (1).



This is the reverse side of the sheet

100-100000

100

SPANNING BEAM STRUCTURE ADAPTED IN PARTICULAR
TO THE CLEARING OF BREACHES BY VEHICLES AND
STRUCTURE TRANSPORTING AND DEPOSITING SYSTEM

ABSTRACT OF THE DISCLOSURE

A spanning beam structure for clearing breaches by vehicles, comprising locking means including at least one pair of locking shafts made fast to a raisable access jib and to a central box, respectively, of the spanning beam while extending longitudinally of the central box along the same axis in the locked position of the access jib and two jaw-like members gripping round to confronting heads of both locking shafts.

Fig. 11

This is the replacement sheet

Date: 13 APR 1997





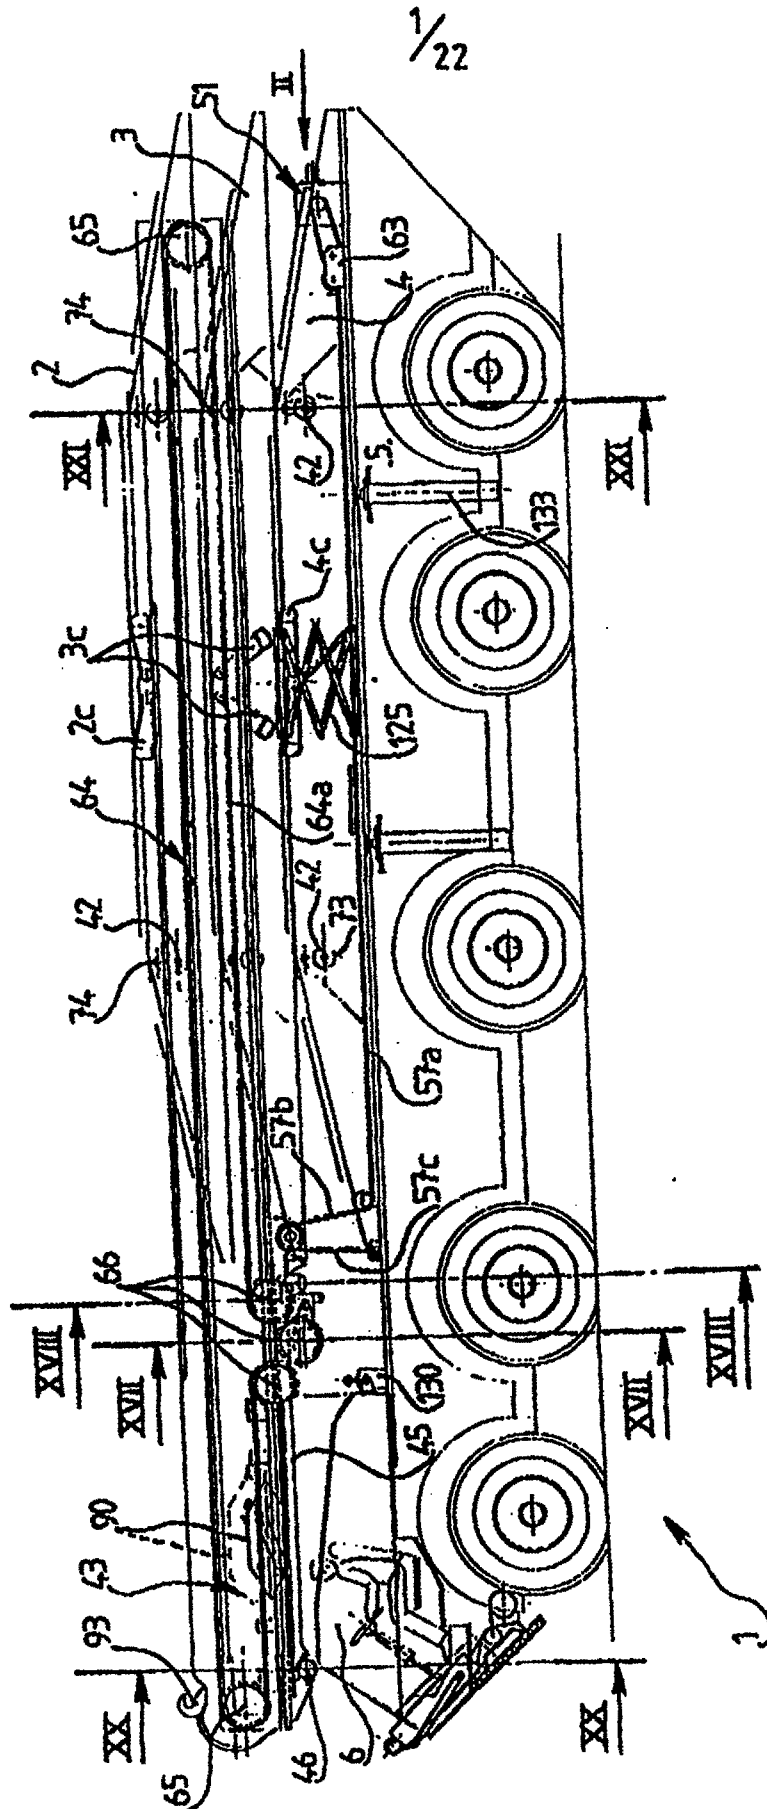


Fig. 1

This is the replacement sheet

Date: 13 APR 1997

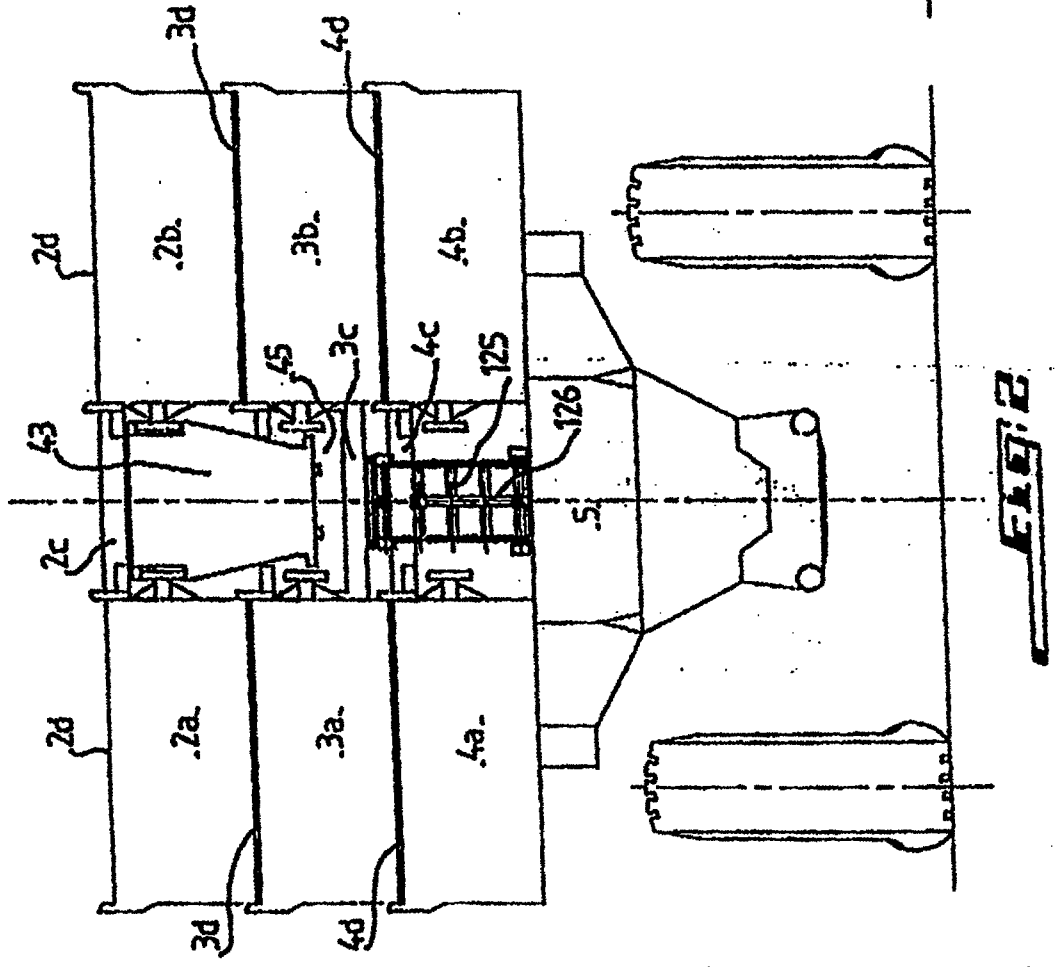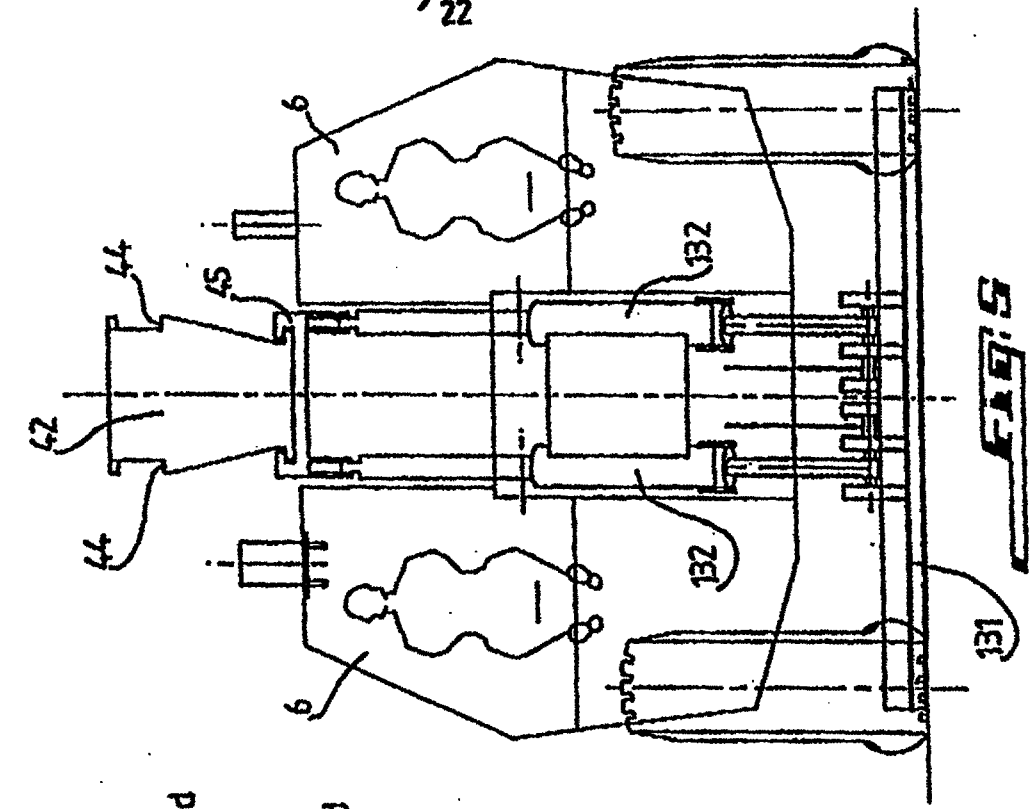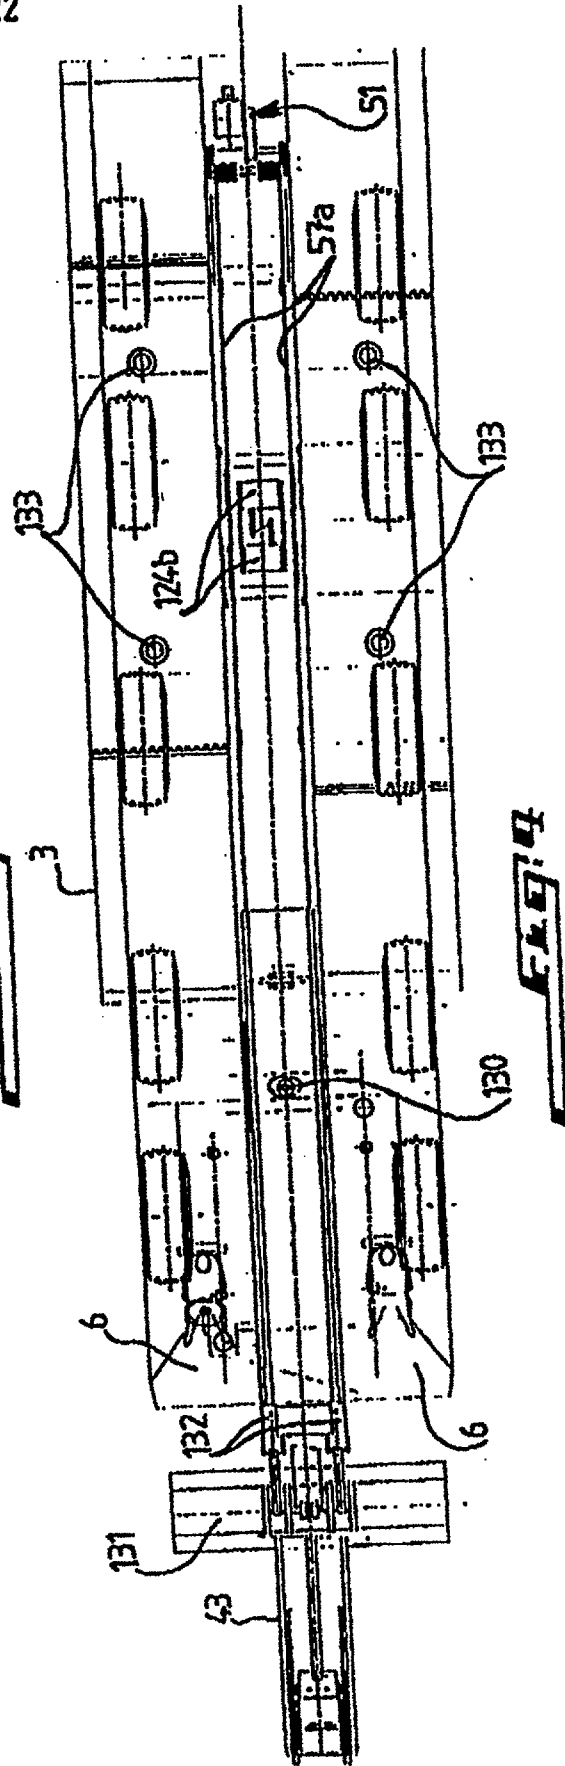

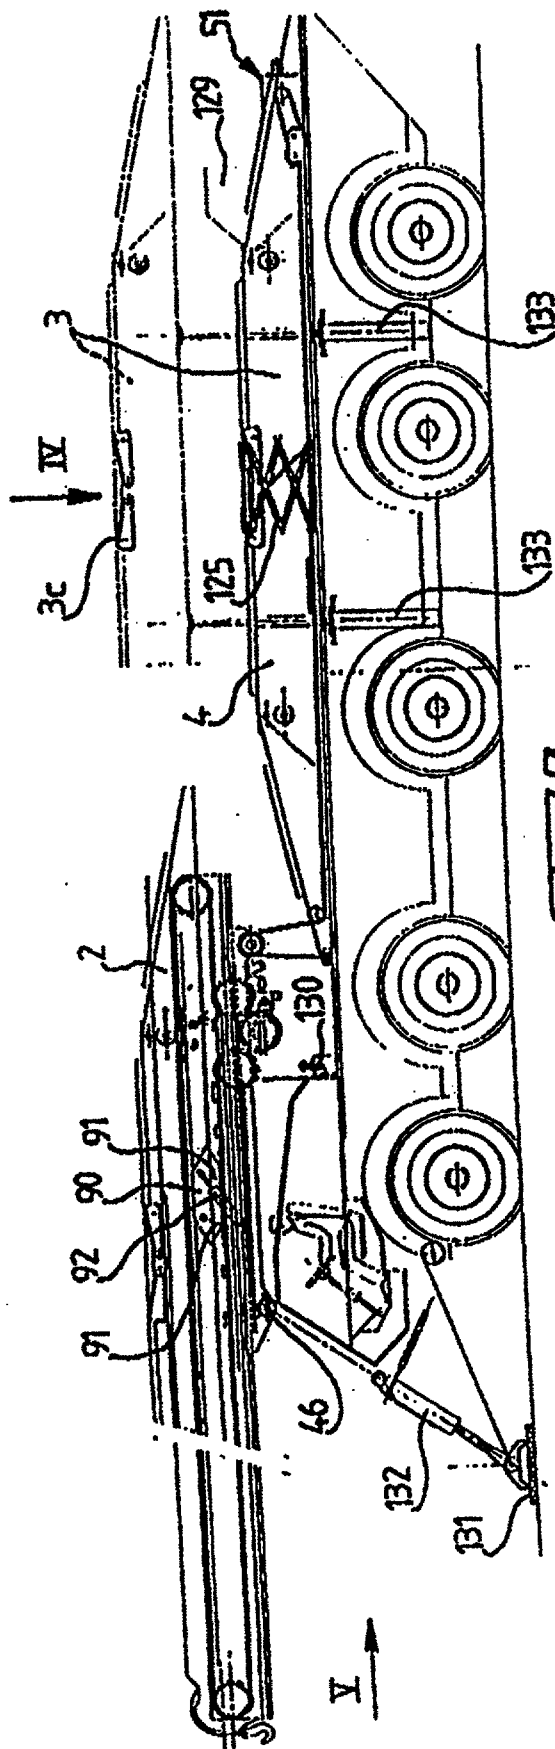

This is the replacement sheet

Date: 13 APR 1997

4/22


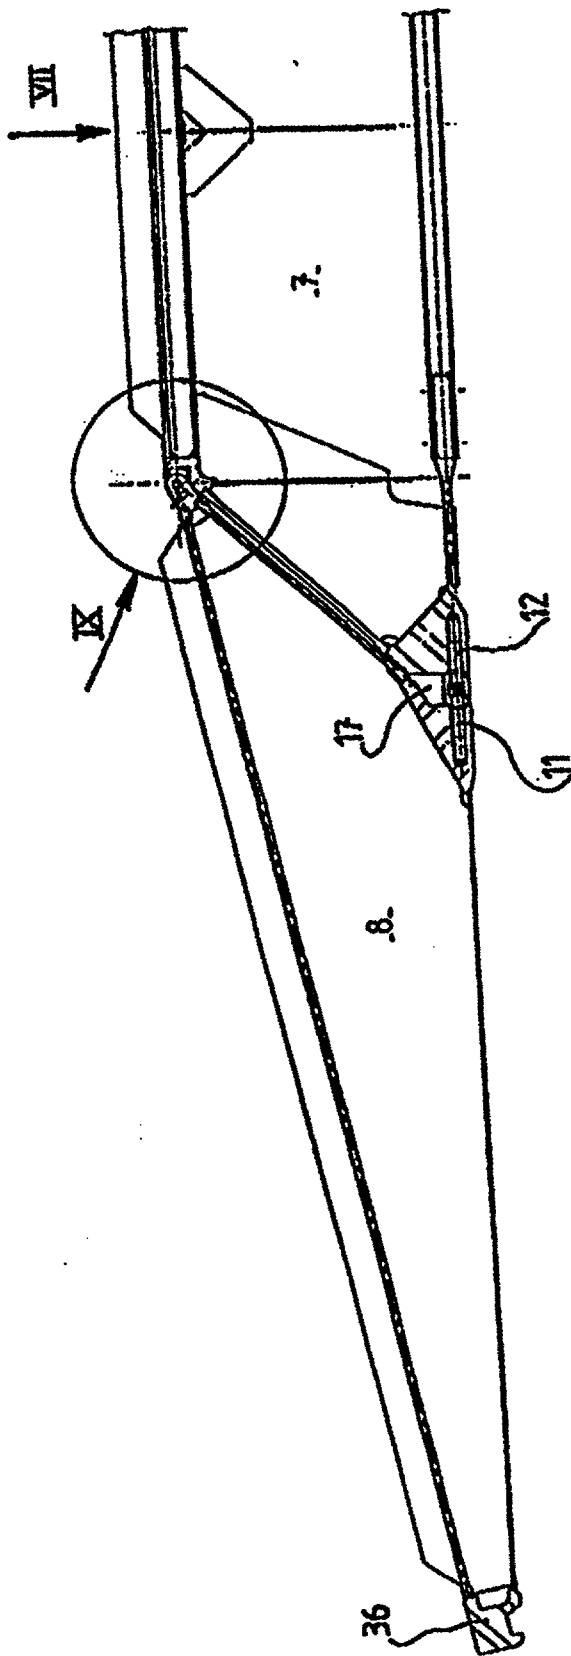


FIG. 6

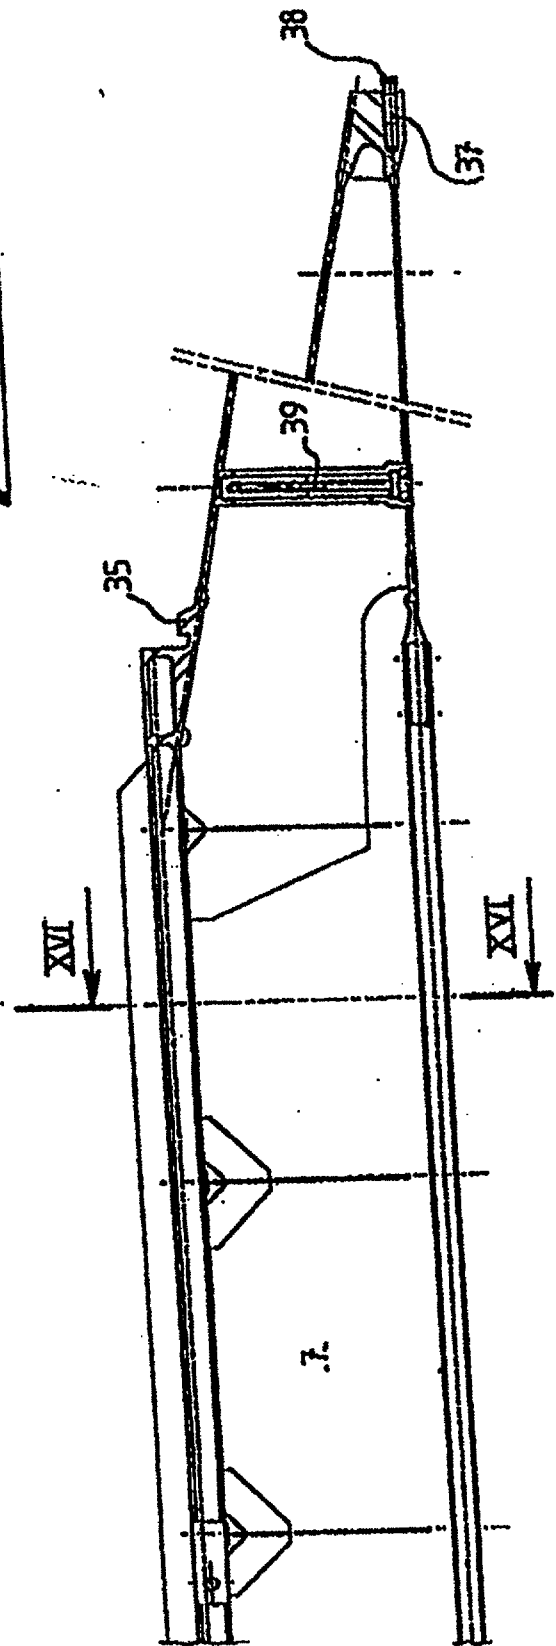

This is the replacement sheet

Date: 13 APR 1997

5/22

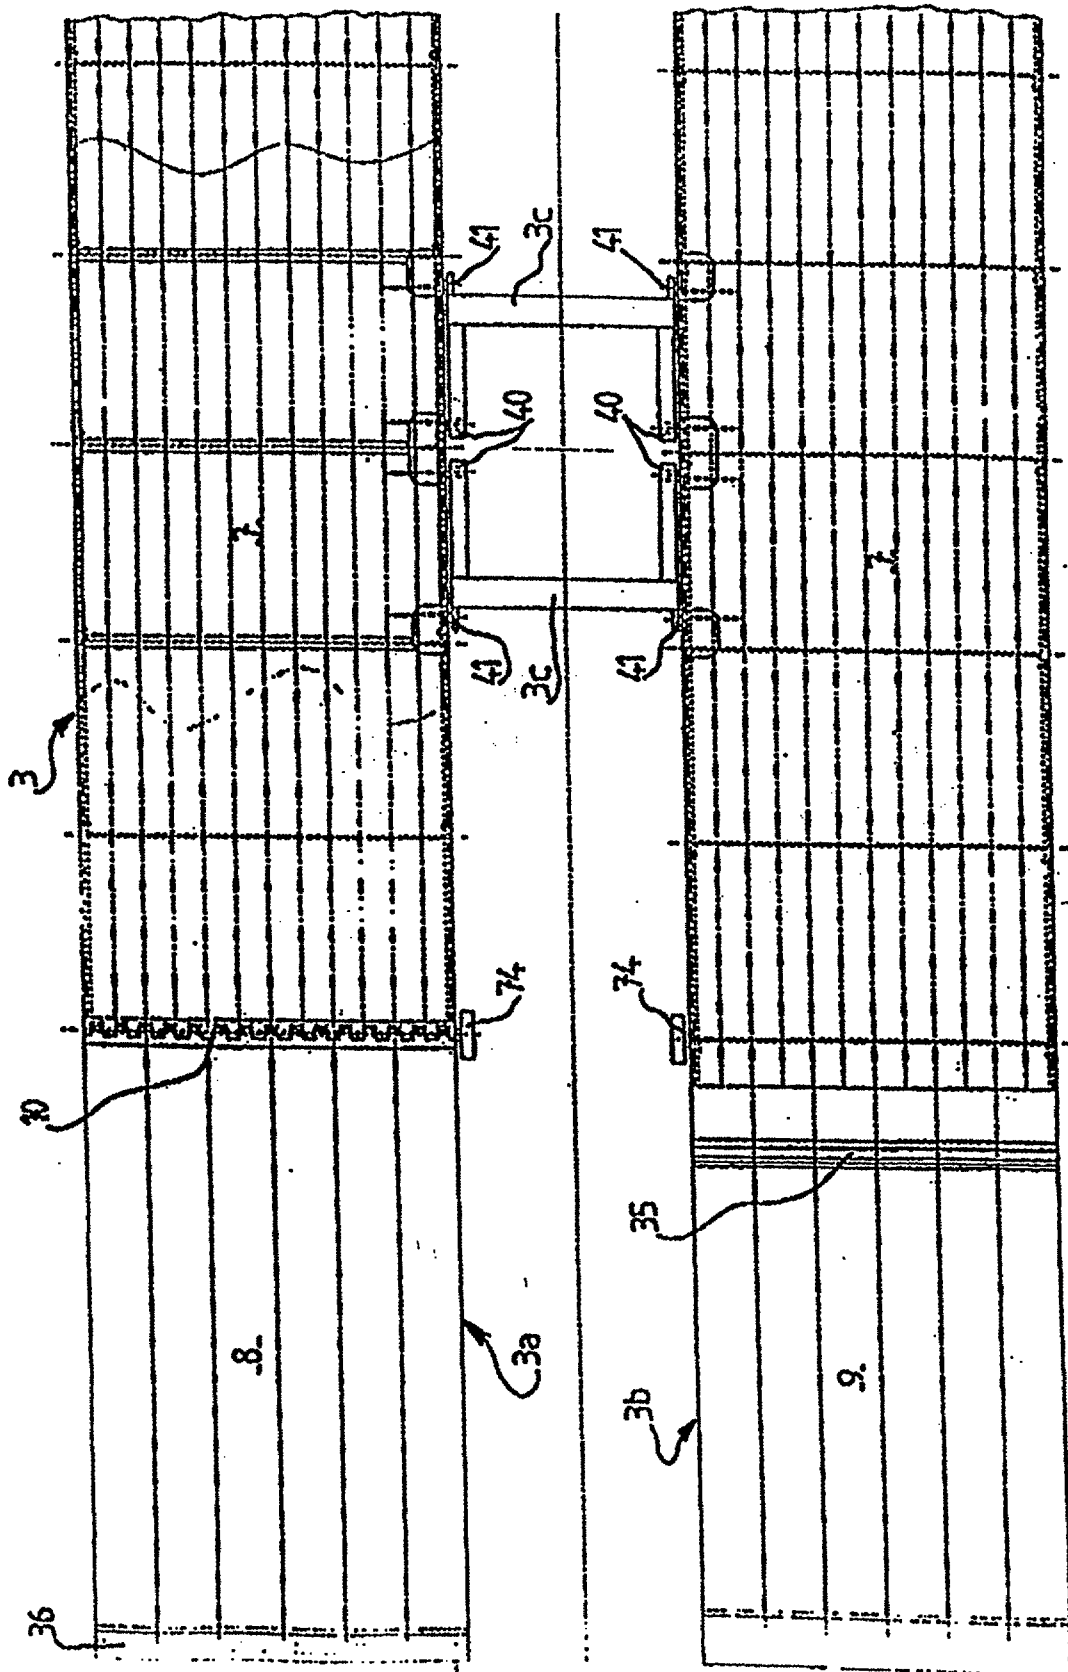


FIG. 7

This is the reverse side of sheet

100-1000000

6/22




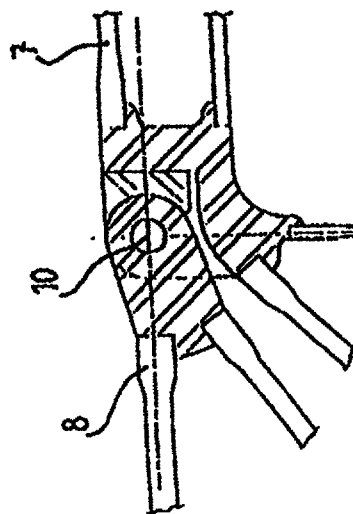


FIG. 9

FIG. 10

This is the replacement sheet


Date: 13 APR 1997

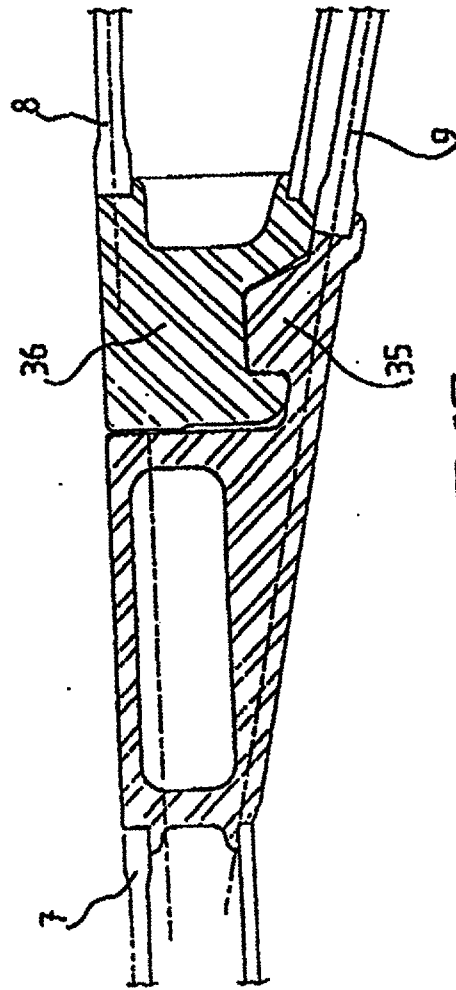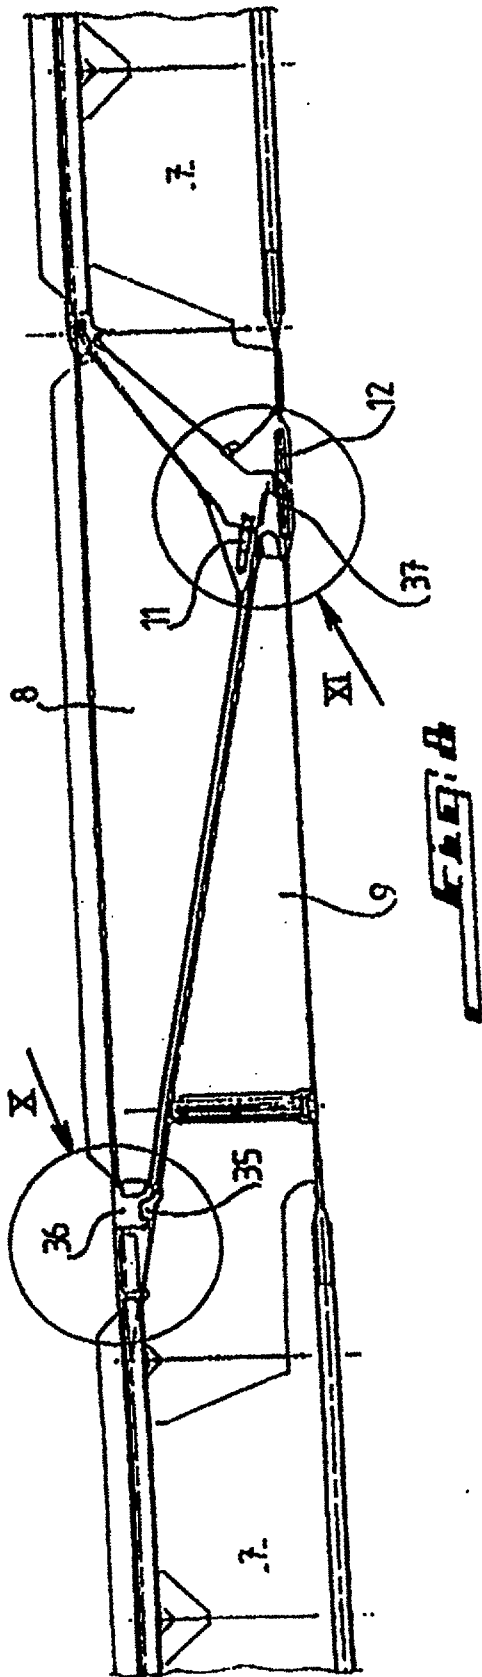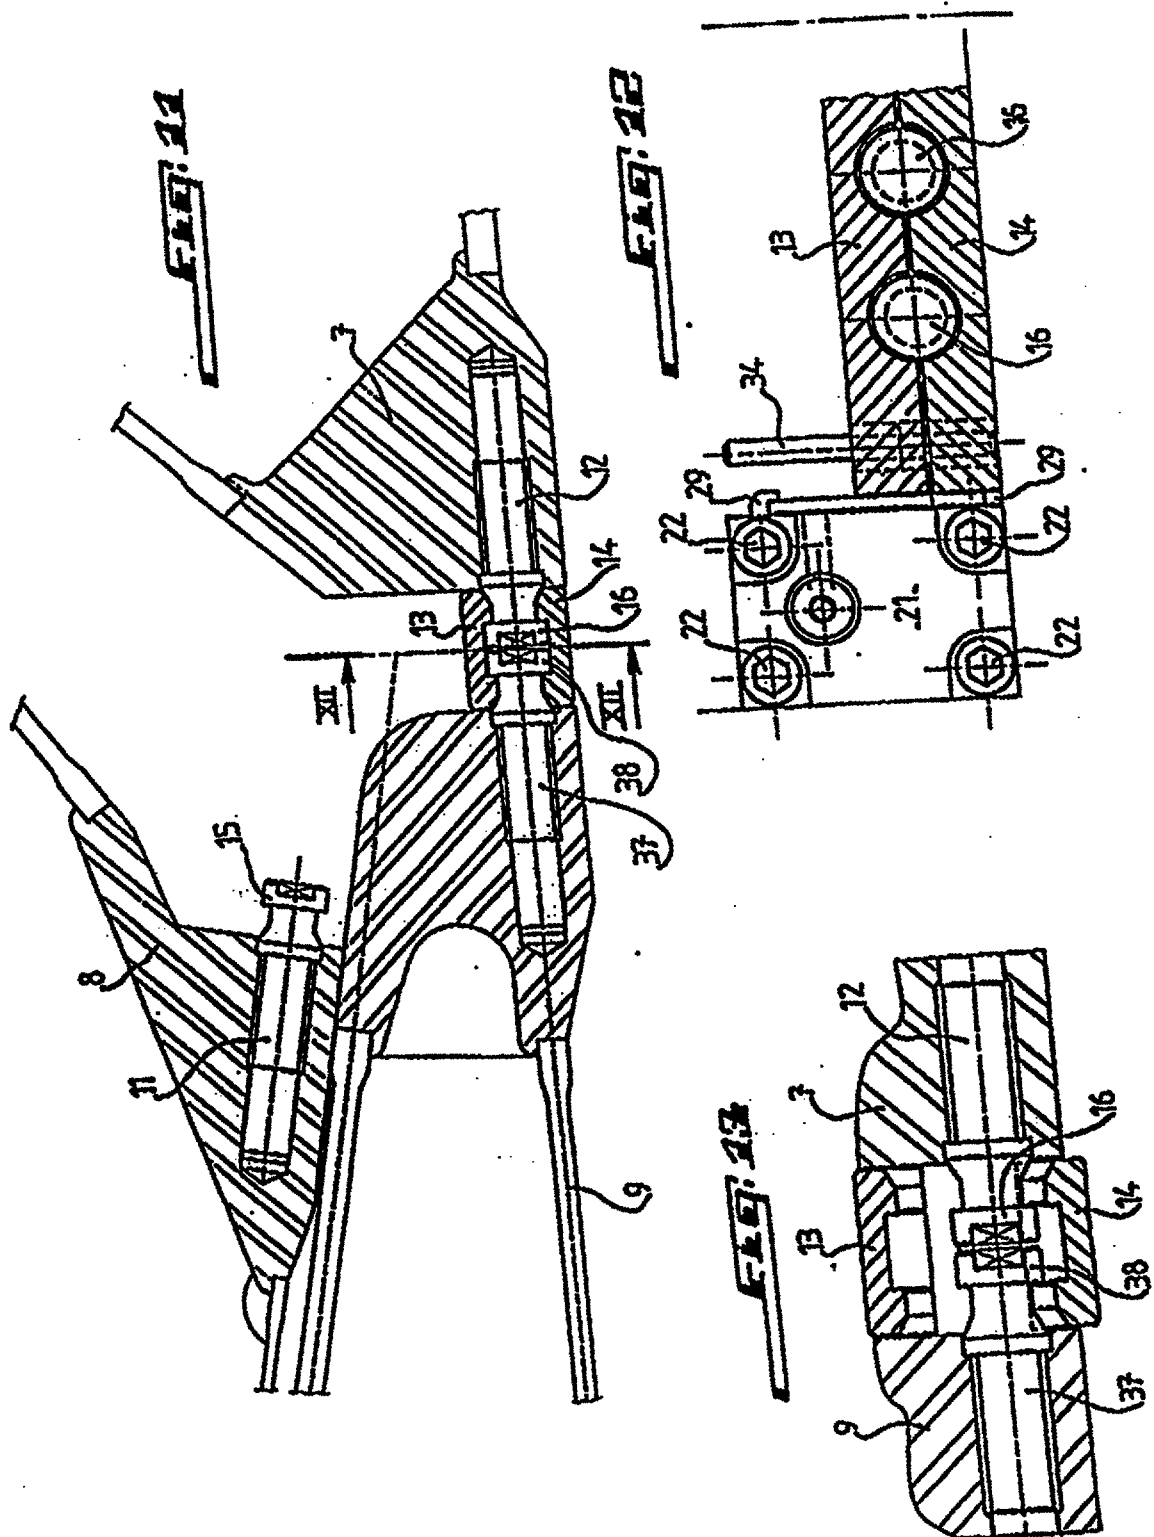

This is the replacement sheet

Date: 13 APR 1997

8/22

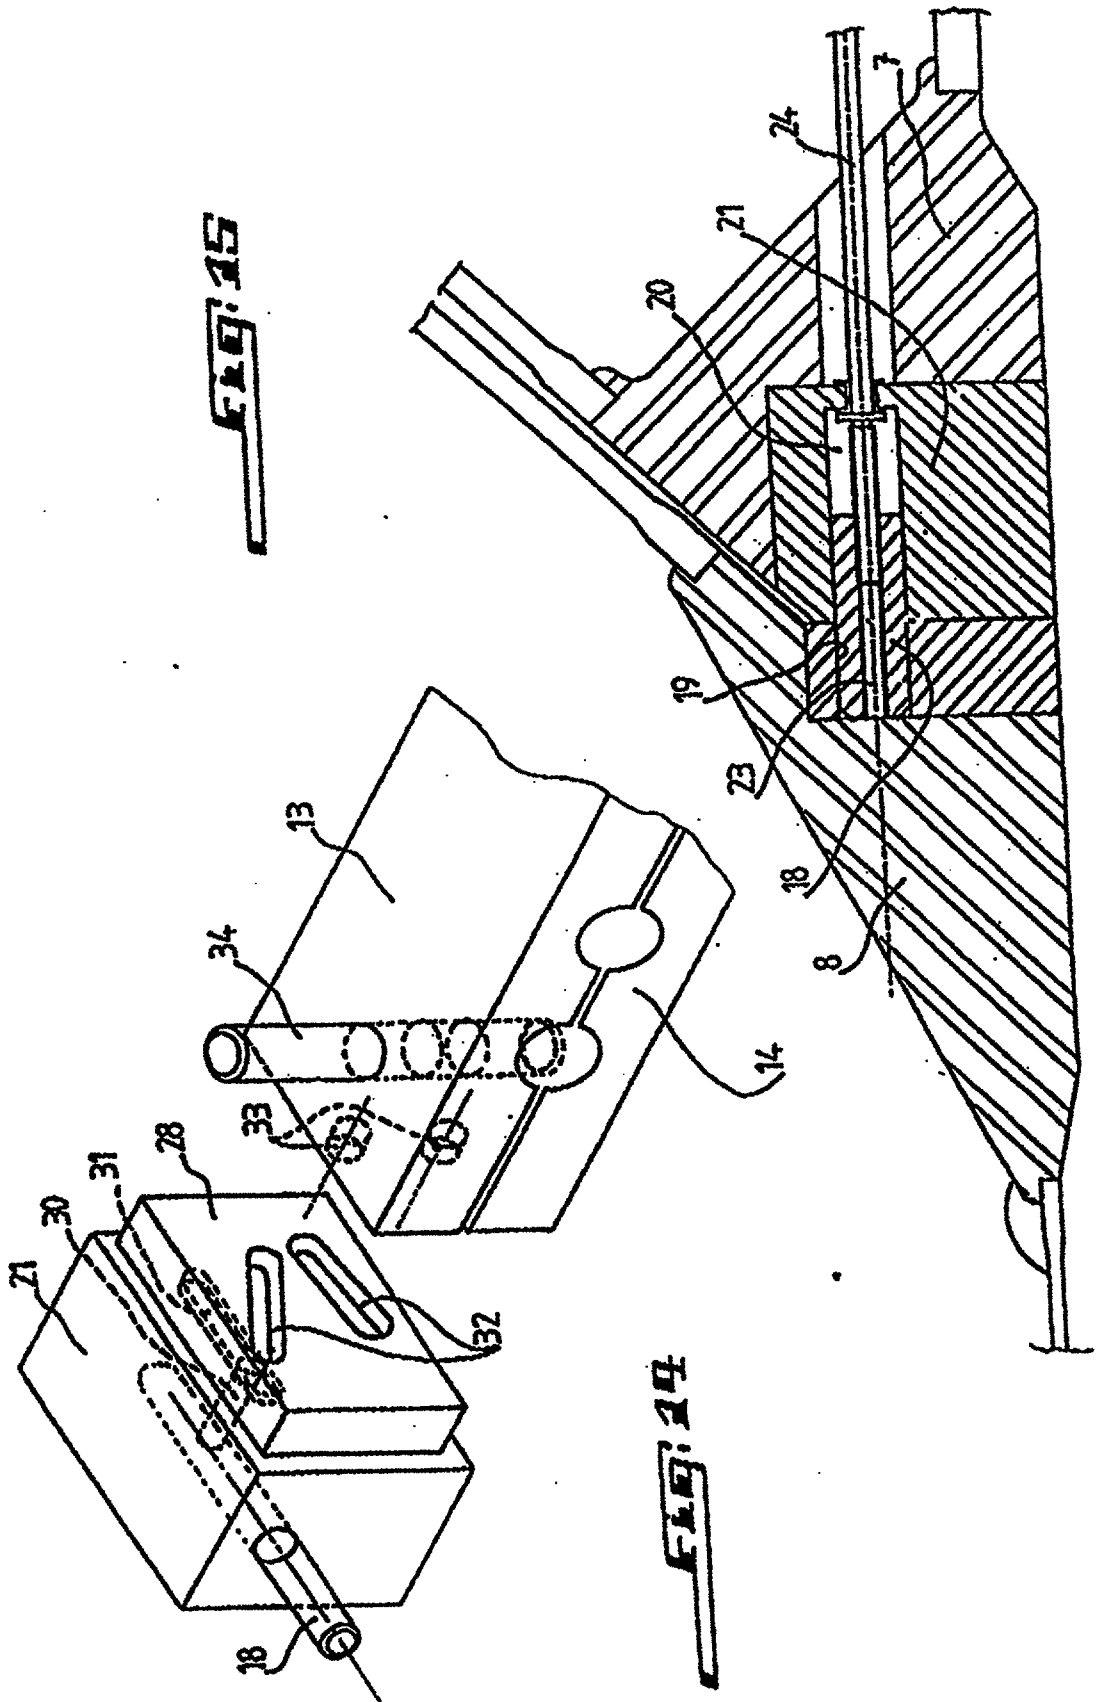

This is the reference sheet

1.000

9/22

FIG. 16


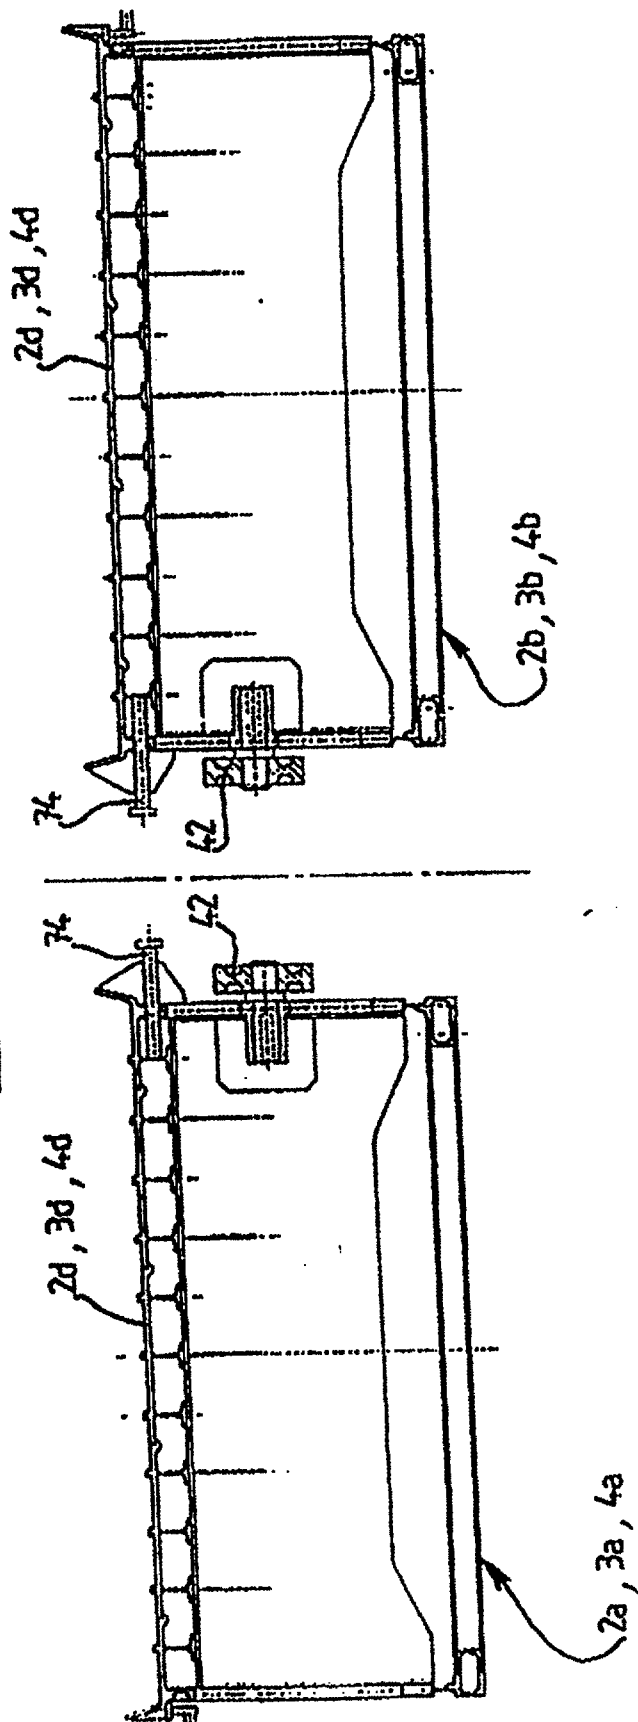




FIG. 17

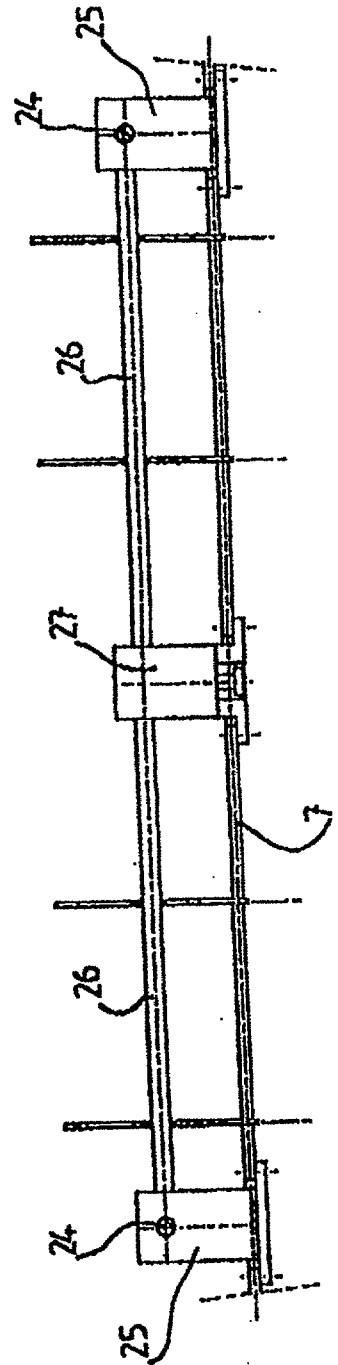

This is the replacement sheet

Date: 13 APR 1997

10/22

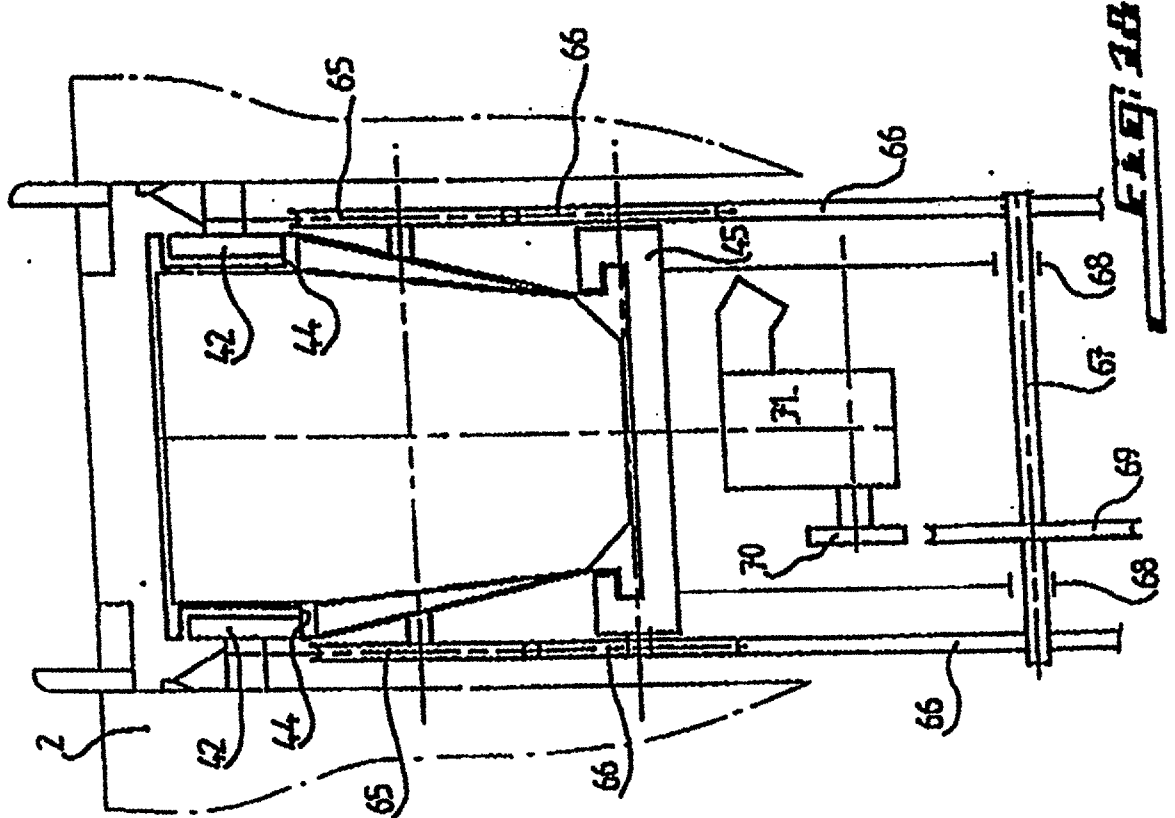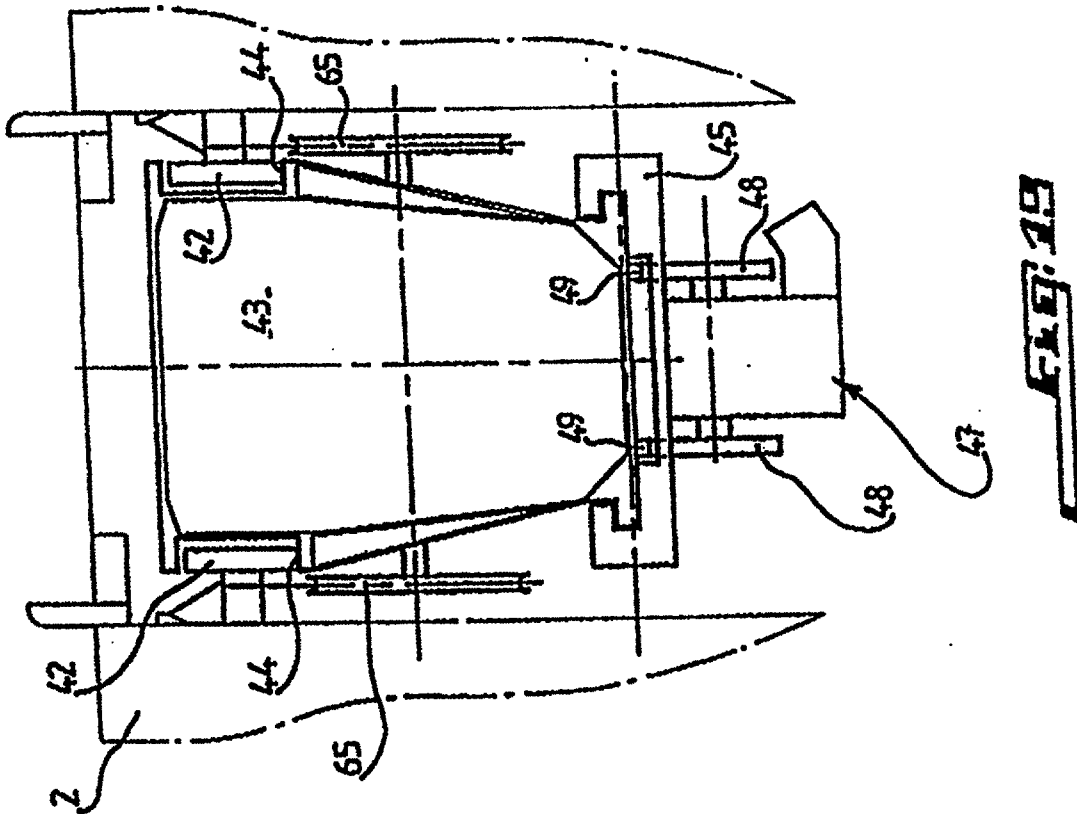

This is the replacement sheet

Date: 13 APR 1997

11/22




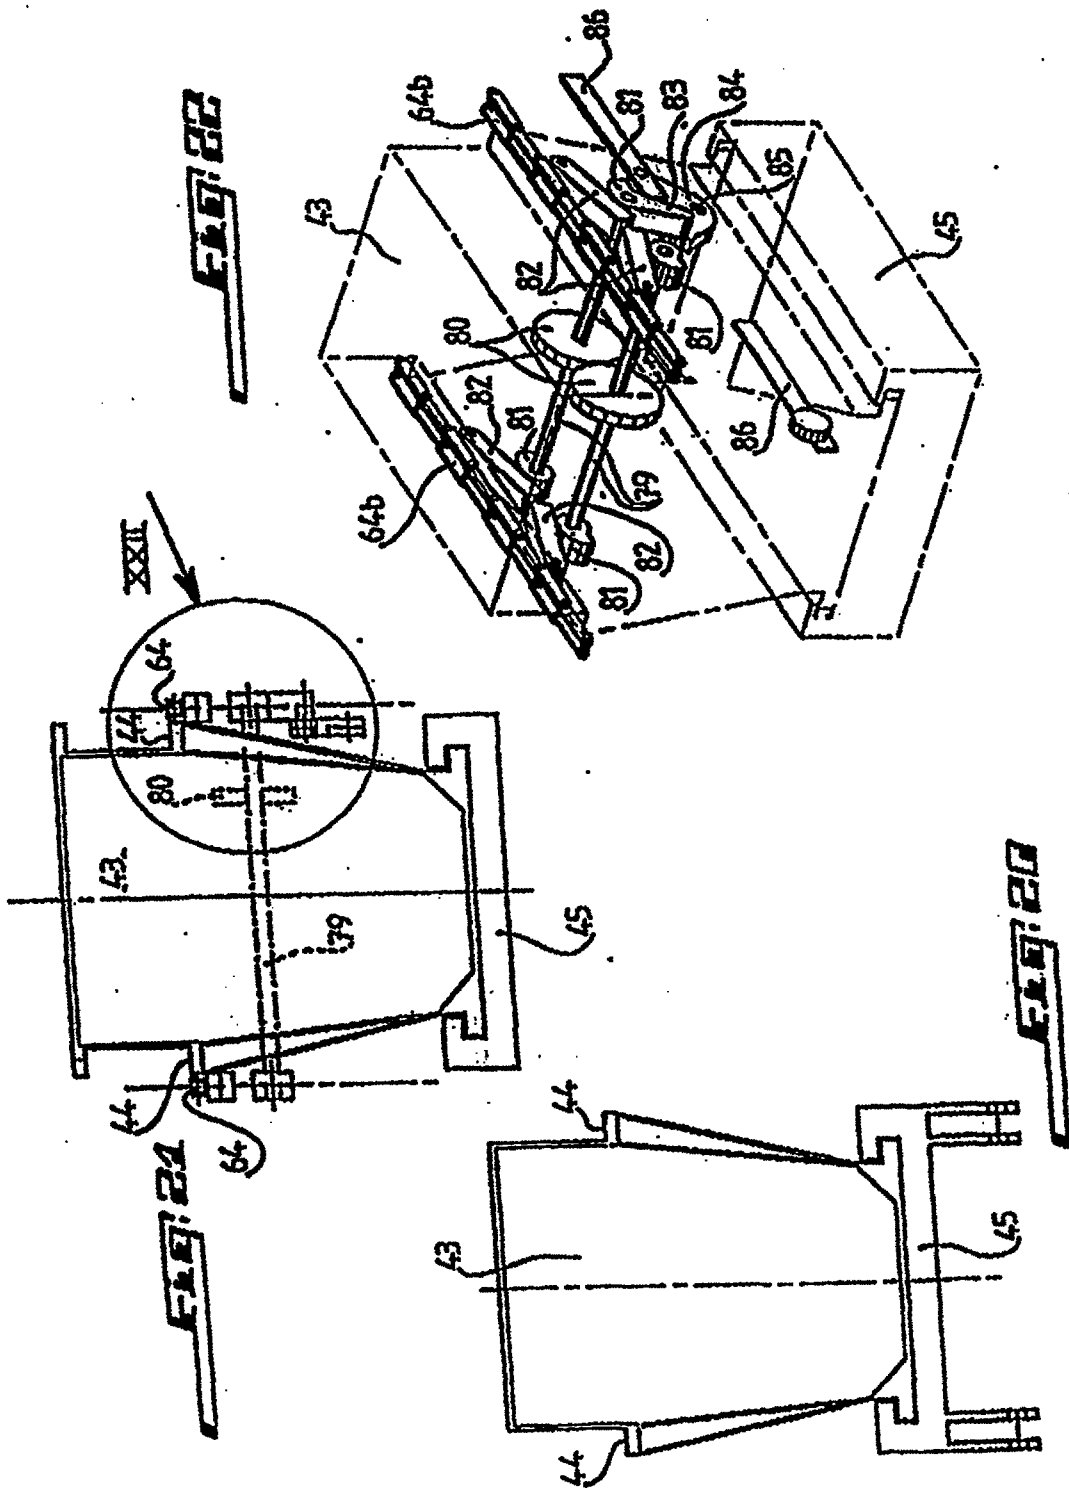


FIG. 20. A perspective view of the assembly.

FIG. 21. A side view of the assembly.

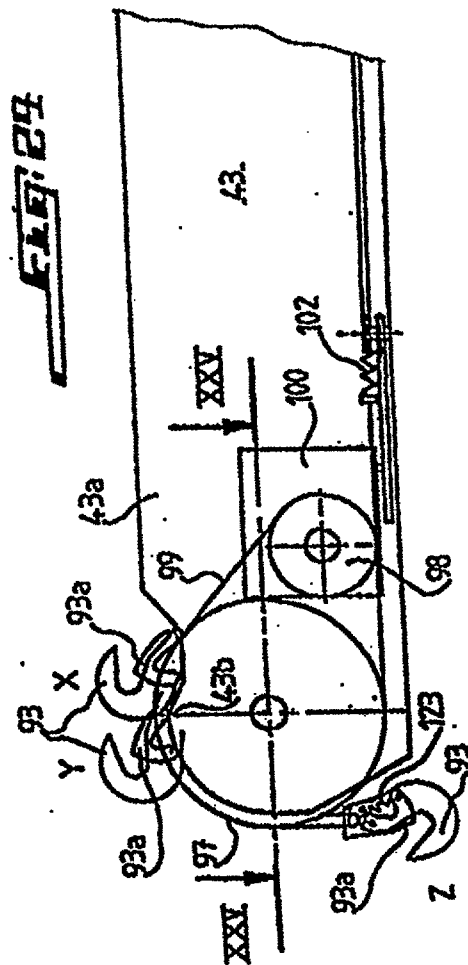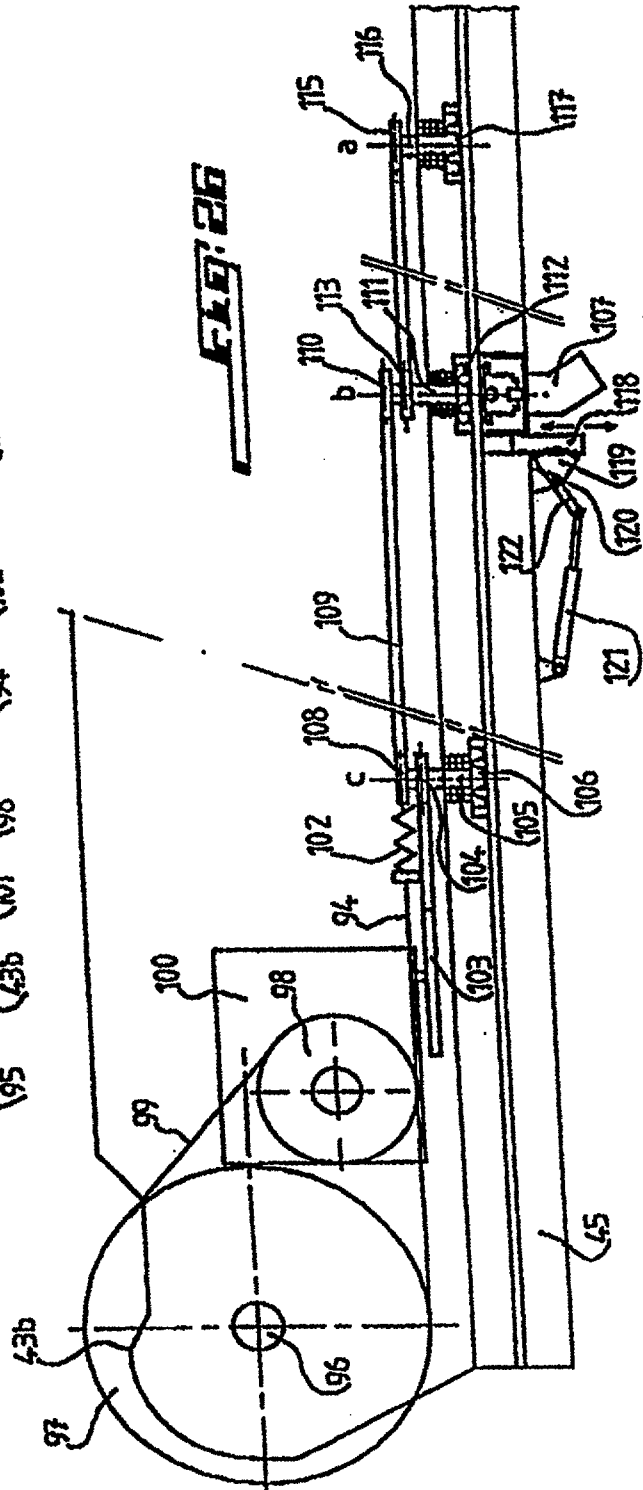

Date: 13 APR 1997

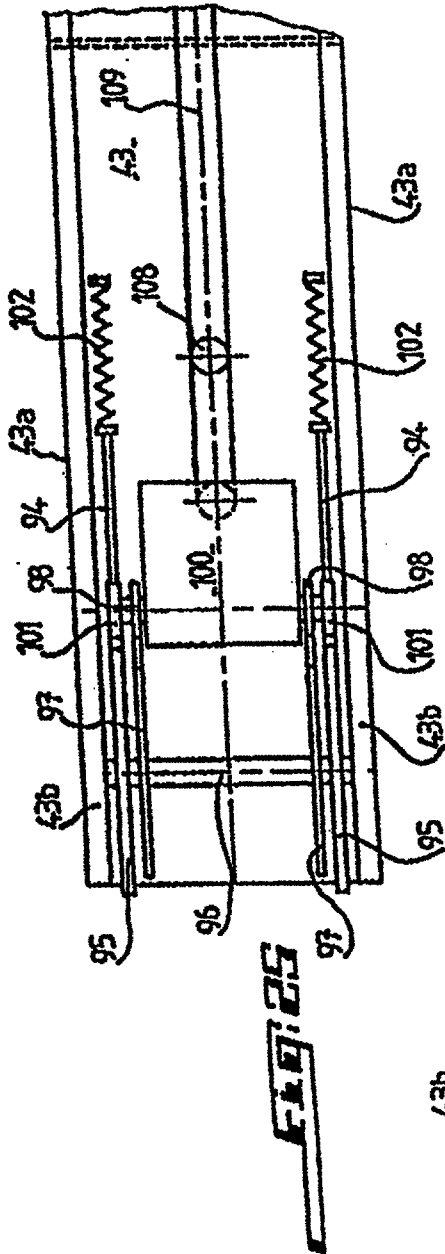

This is the replacement sheet

Date: 13 APR 1997

14/22




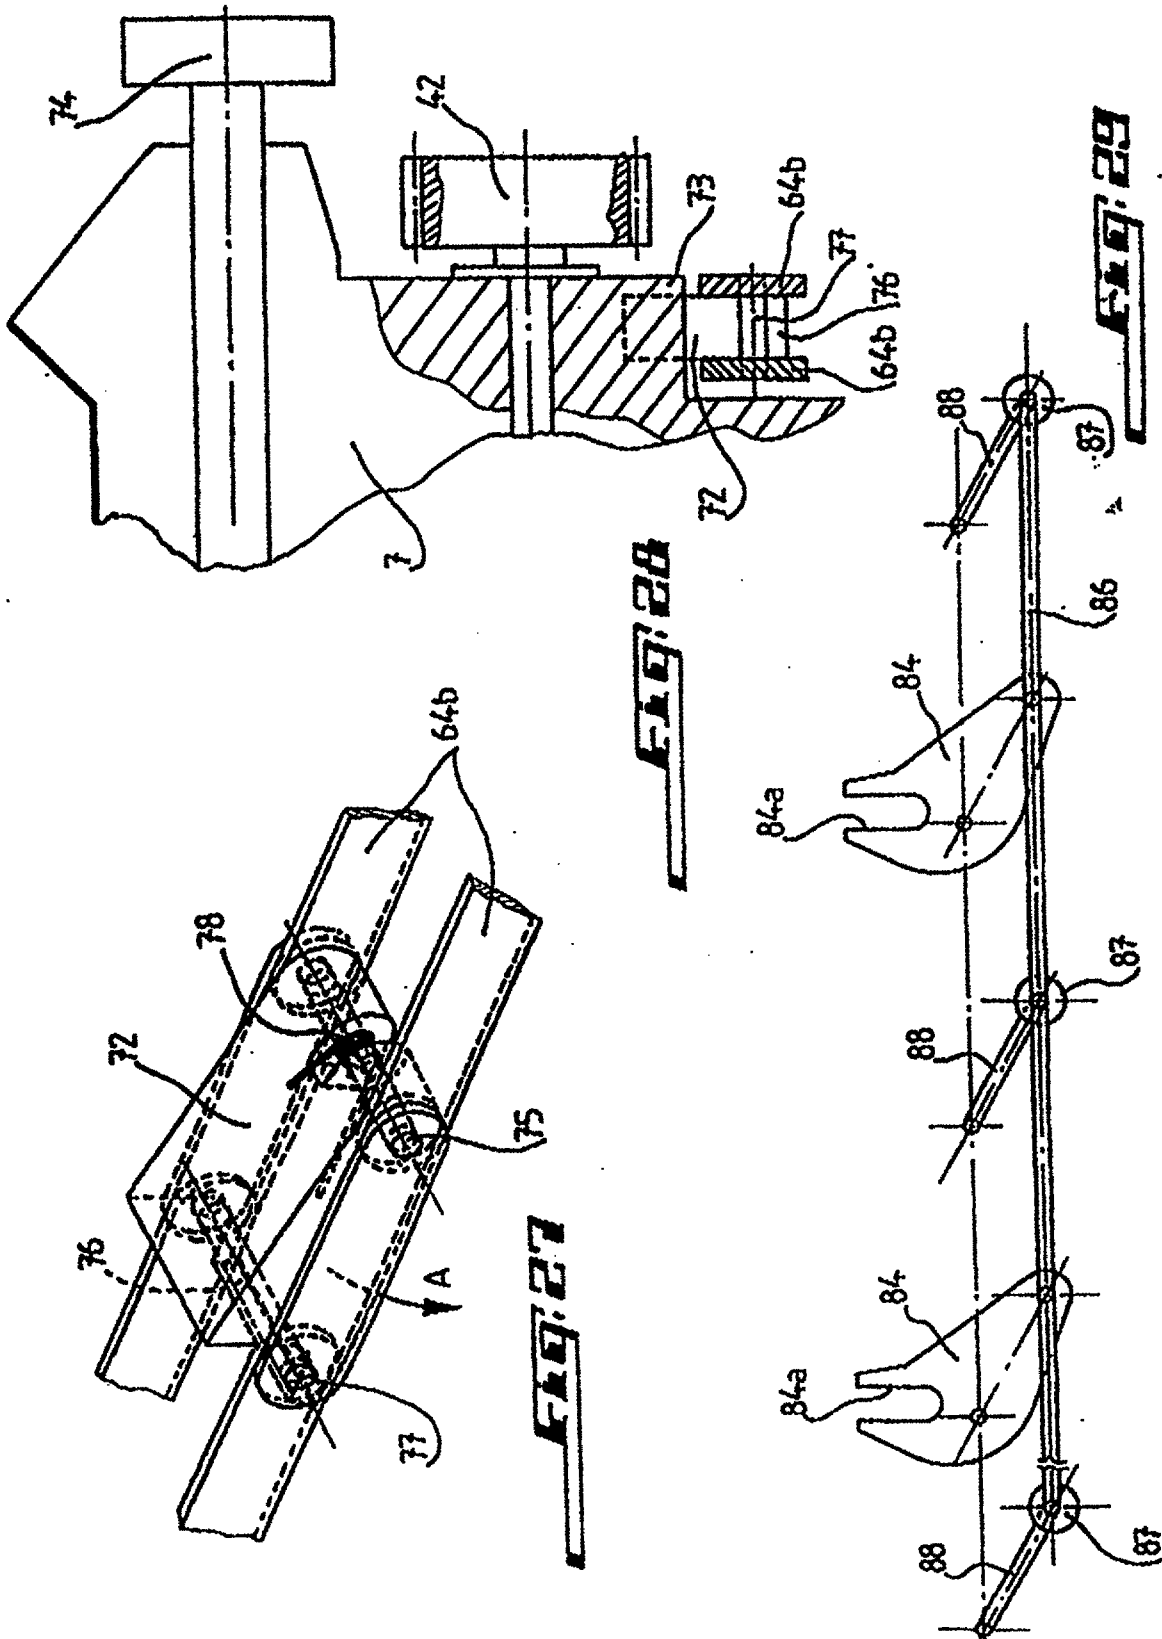


FIG. 29 is a side view of the assembly.

FIG. 28 is a cross-sectional view of the assembly.





15/22

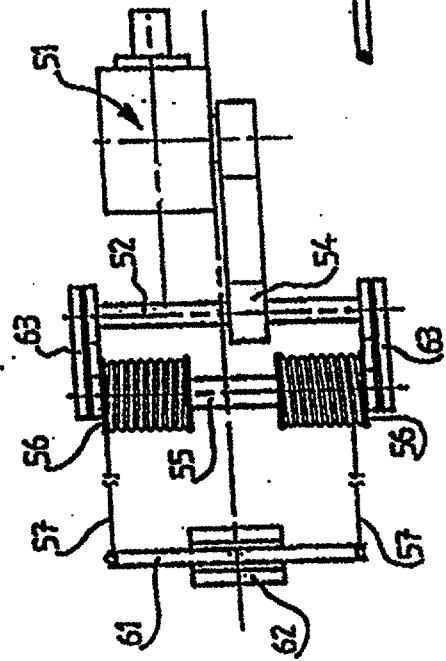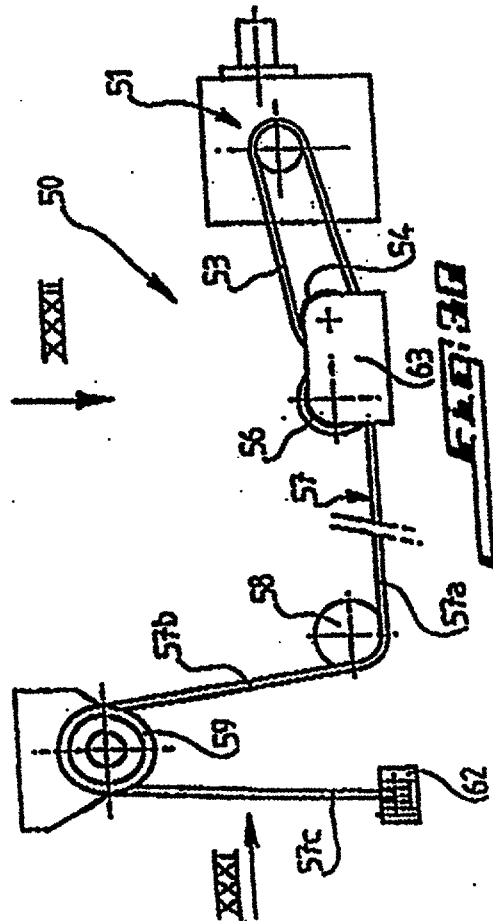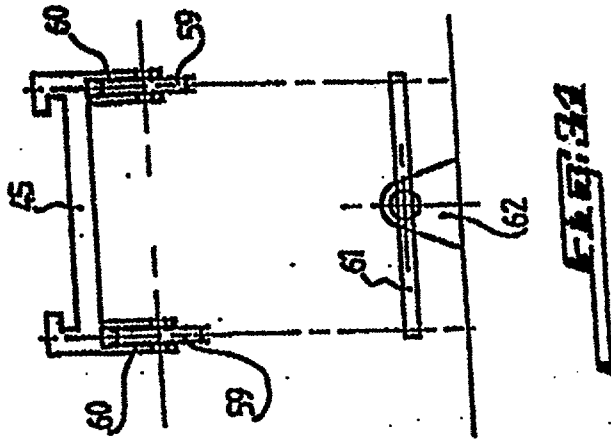

This is the replacement sheet

Date: 13 APR 1997


16/22

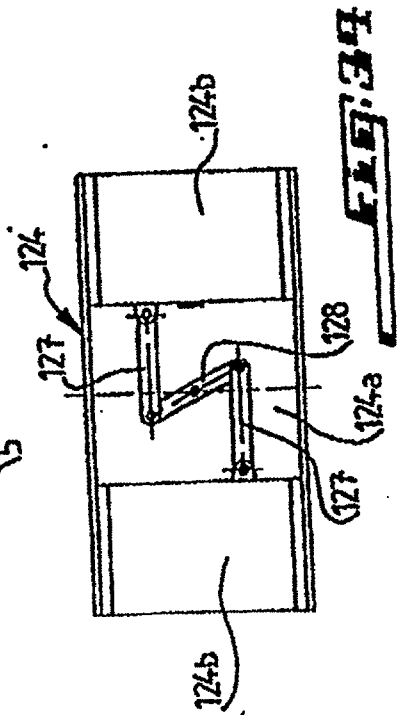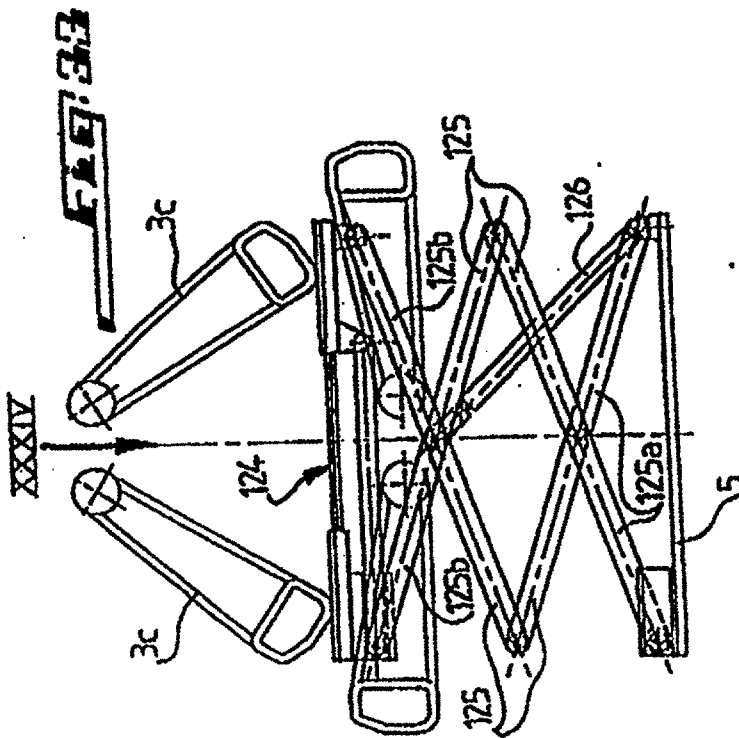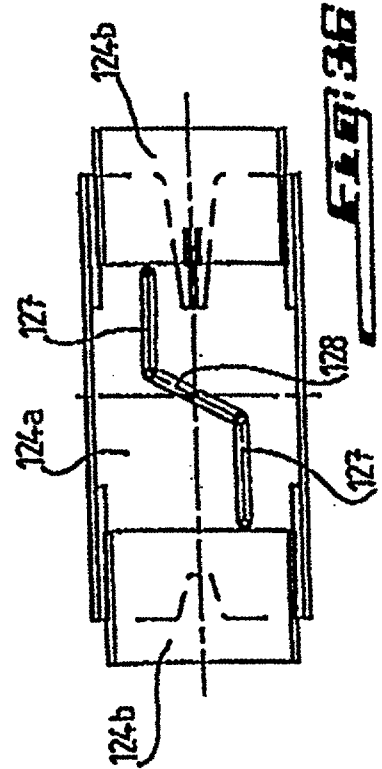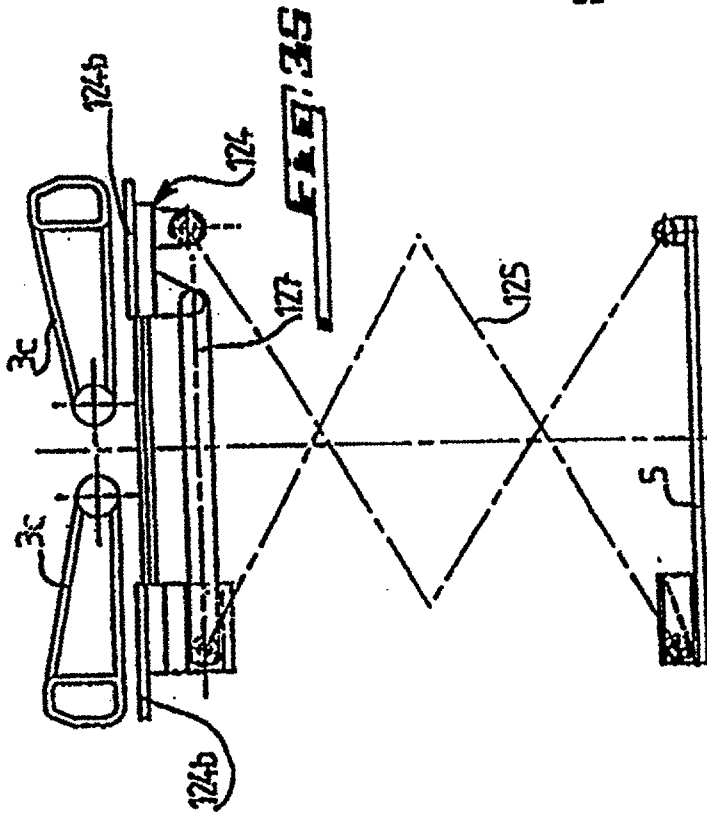

This is the replacement sheet


Date: 13 APR 1997

17/22

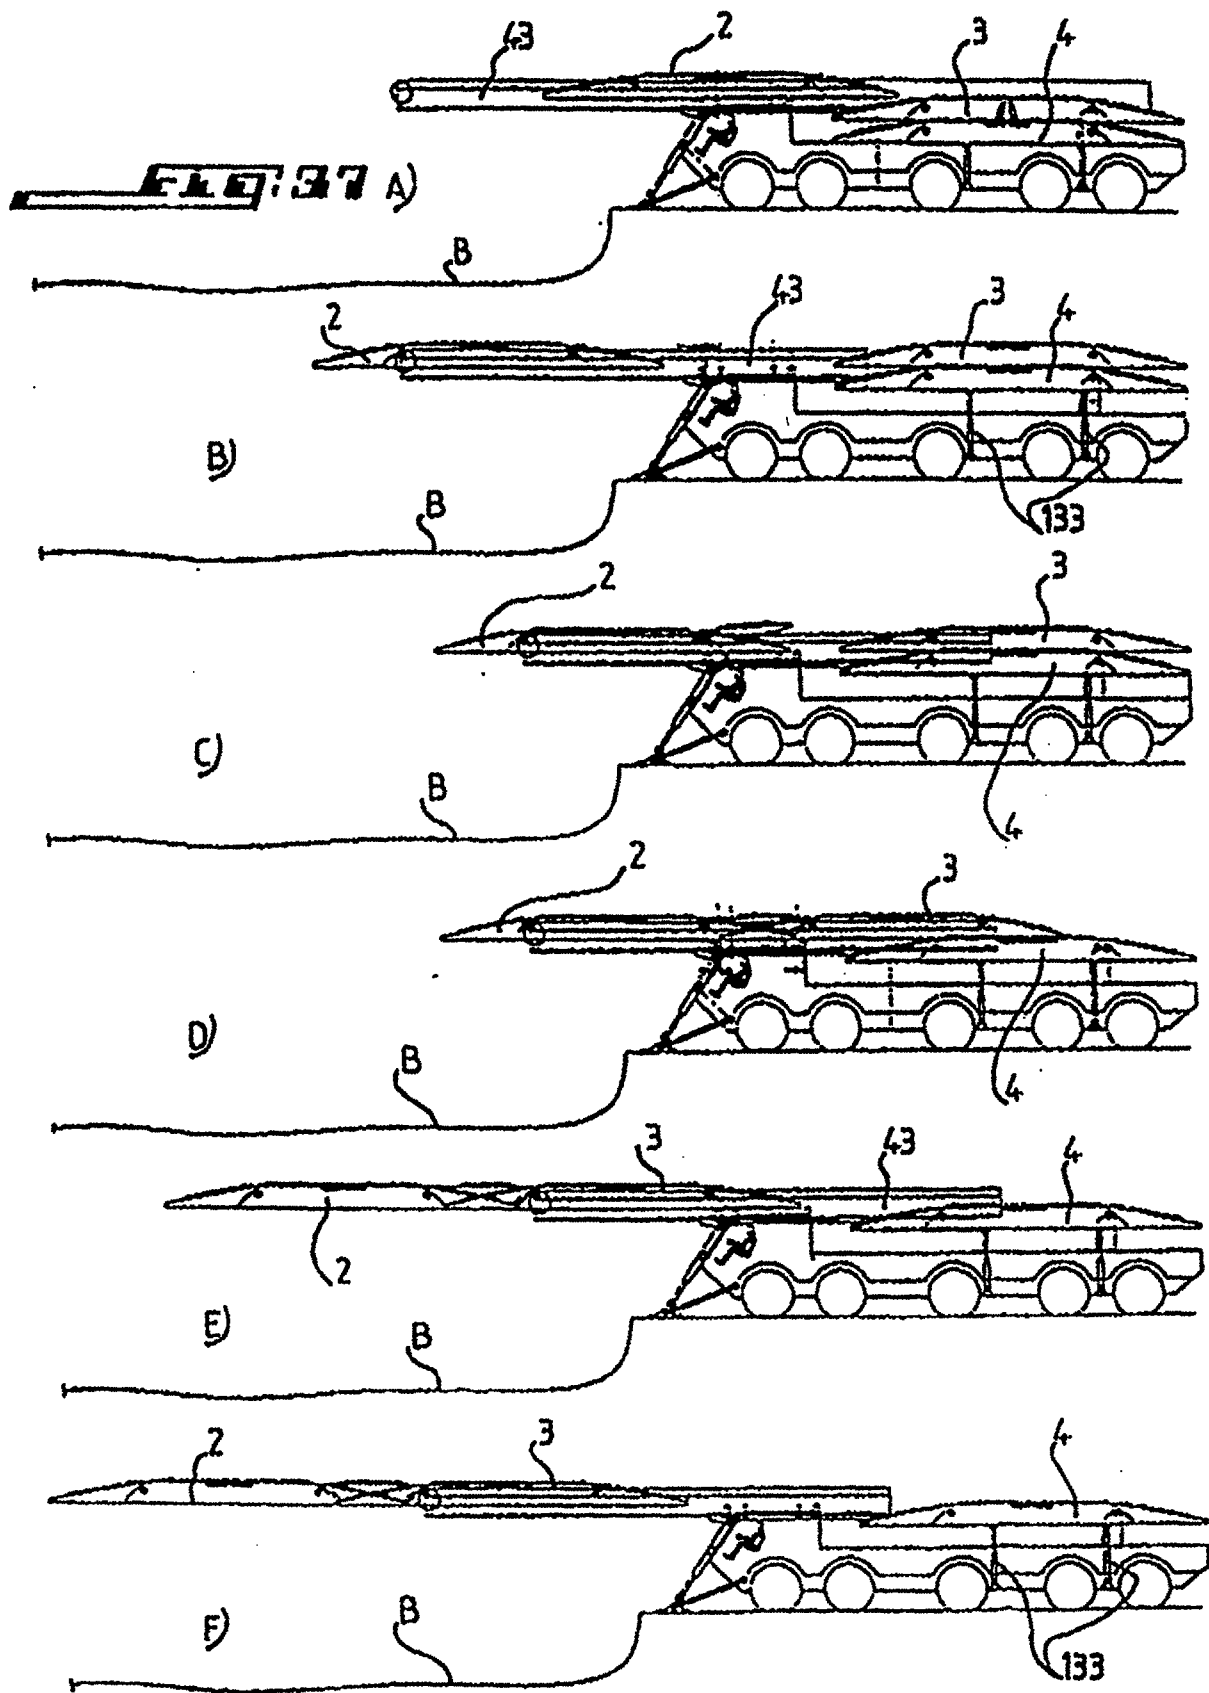

This is the replacement sheet




Date: 1 APR 1997

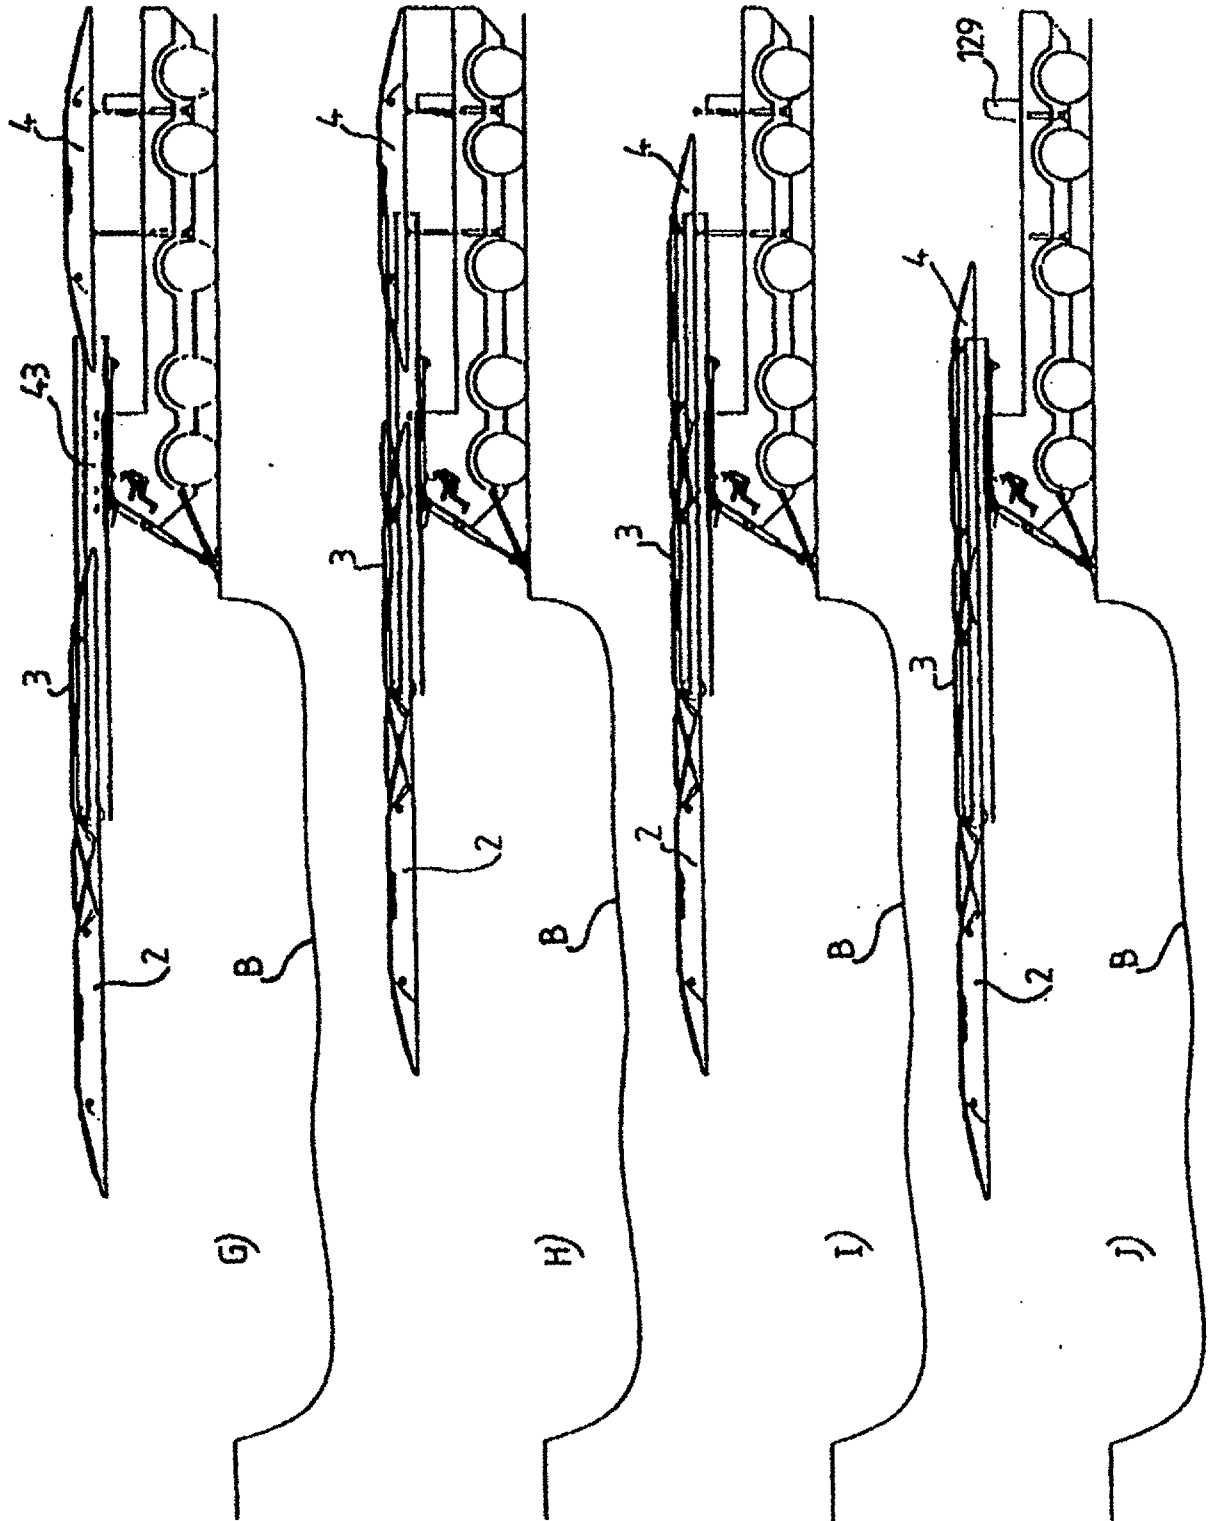

This is the replacement sheet

Date:




18/22

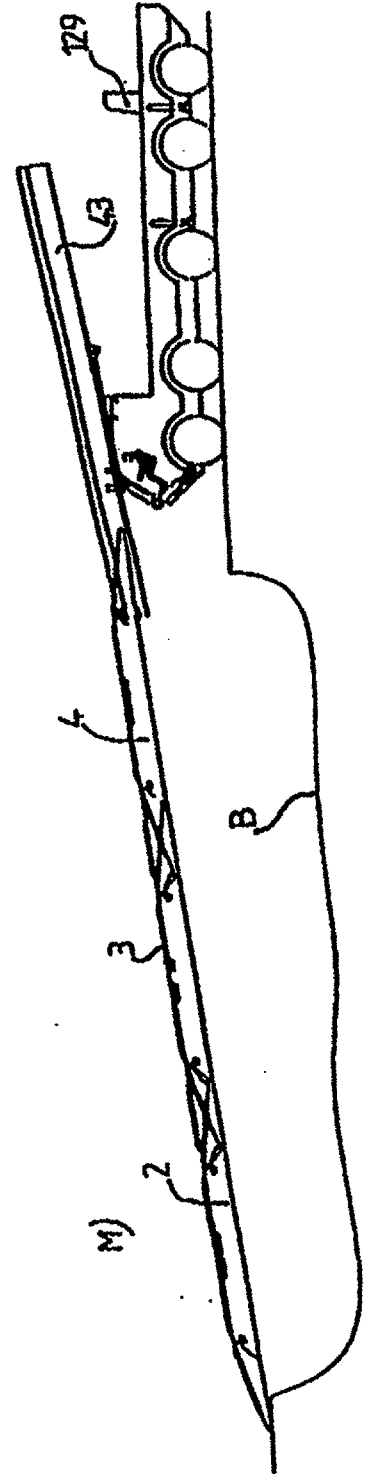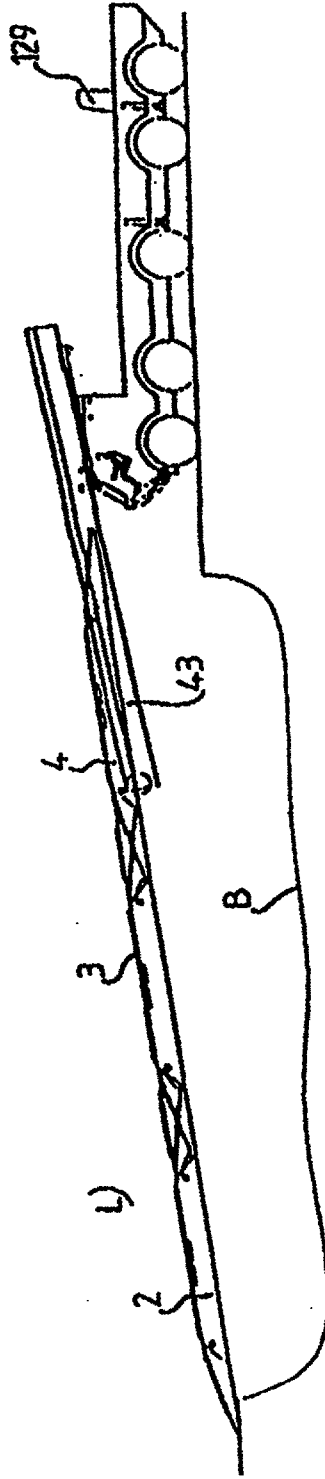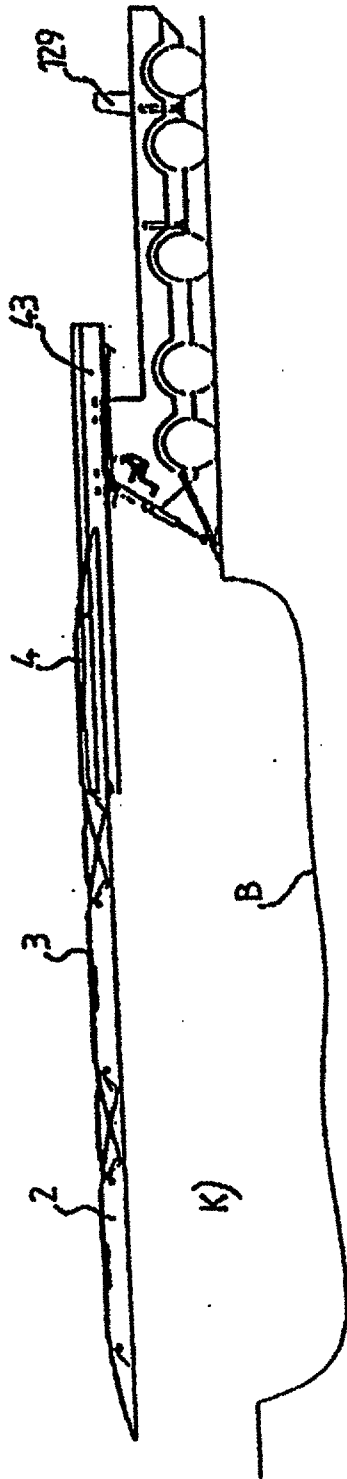

This is the replacement sheet


Date. 13 APR 1997

20/22

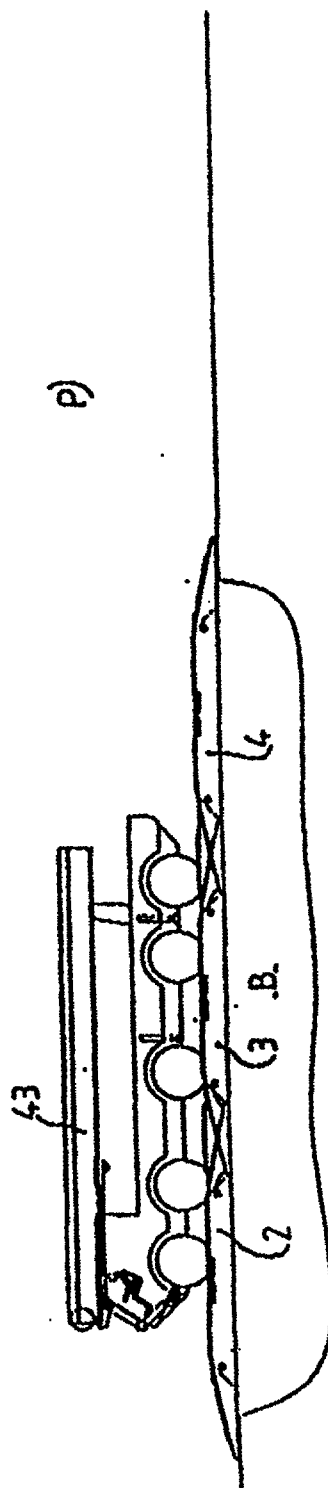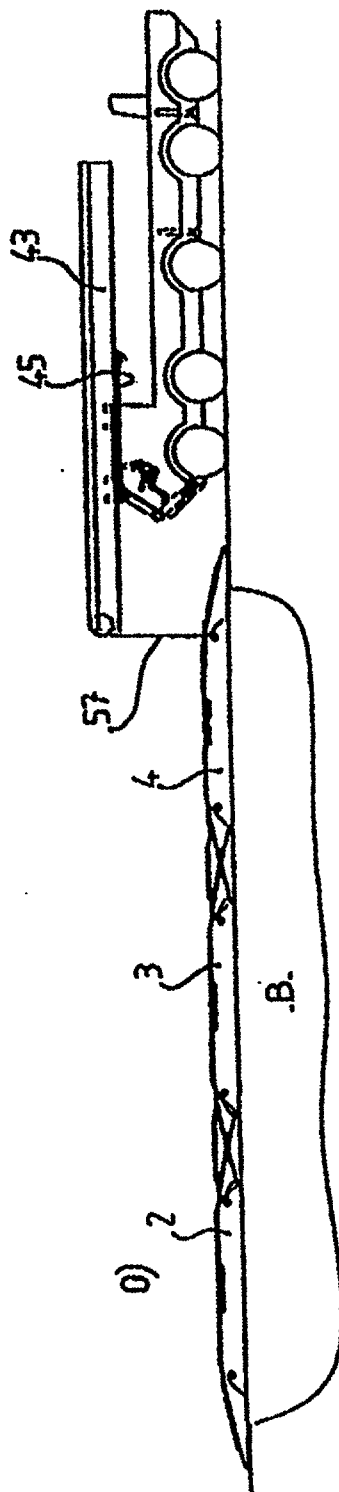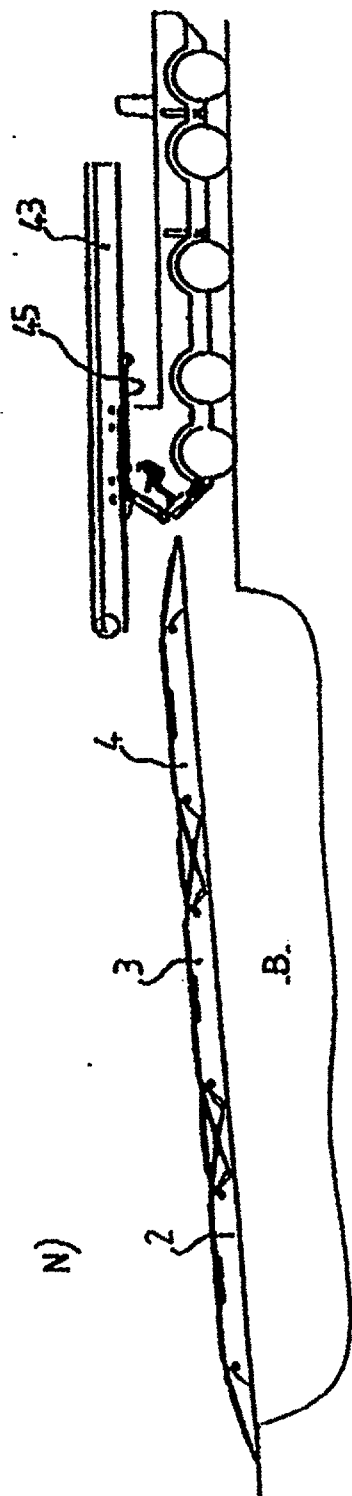

This is the reference sheet




Date: 13 APR 1997

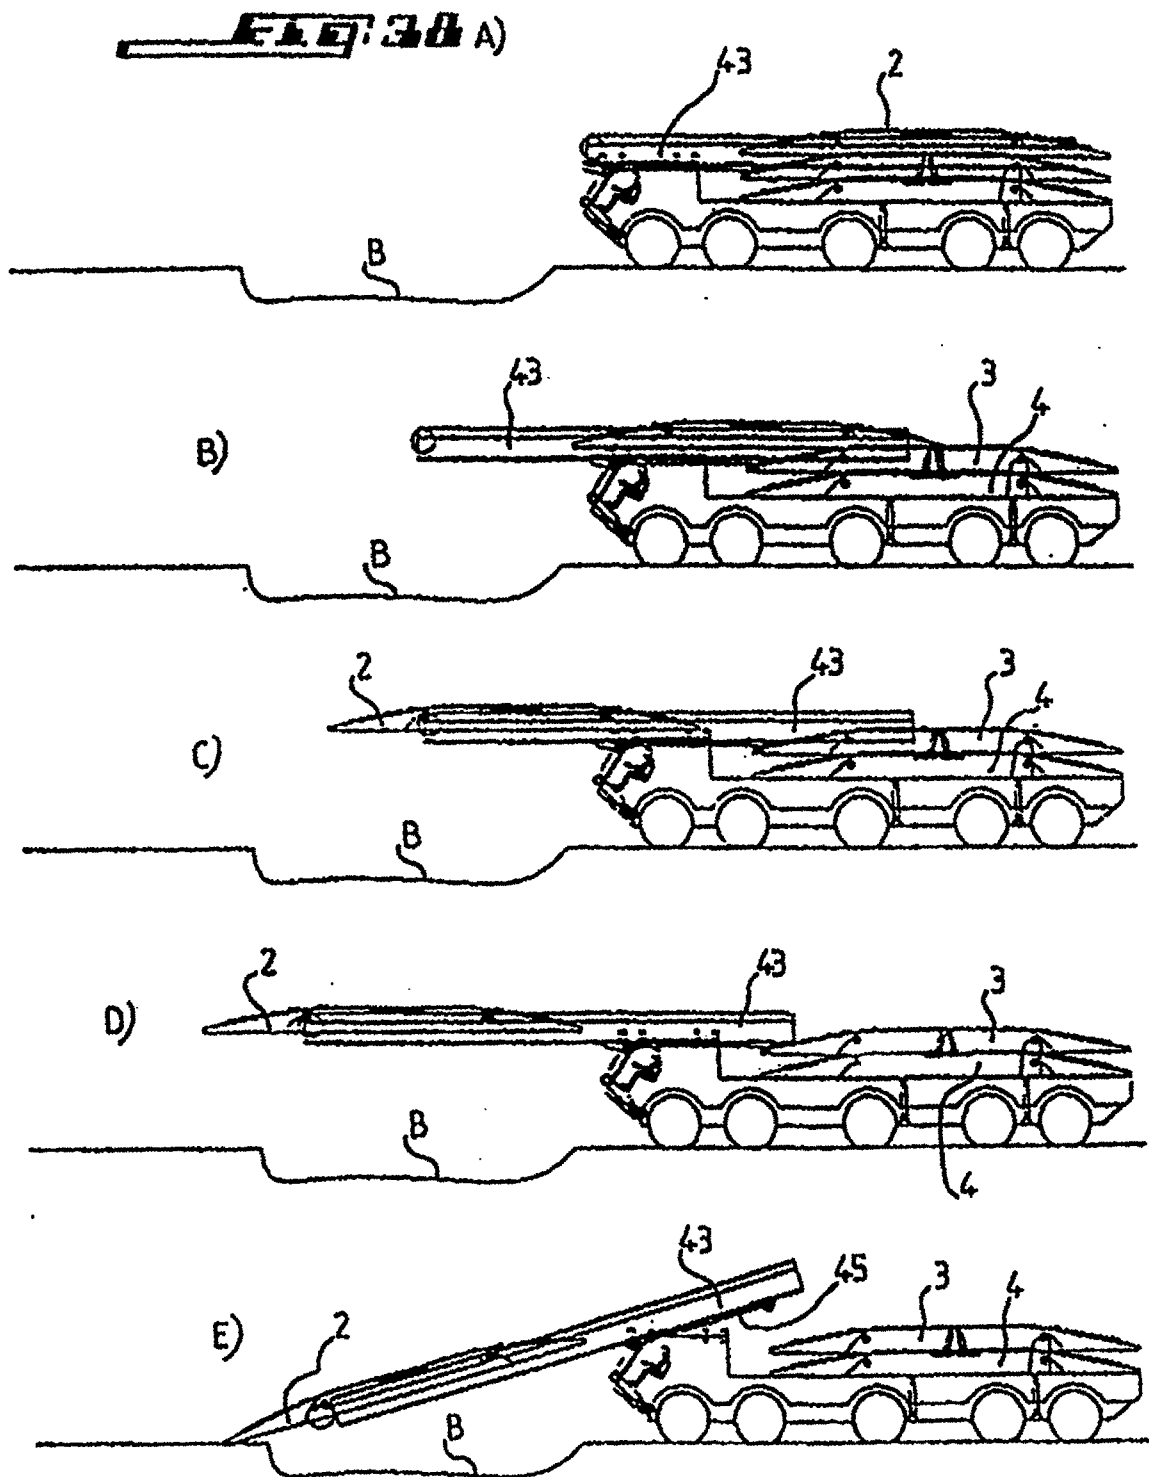

This is the replacement sheet

Date:

1.2.2017

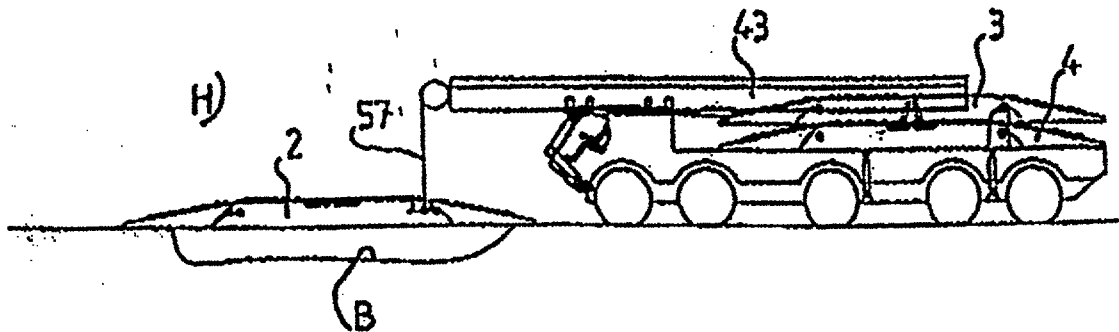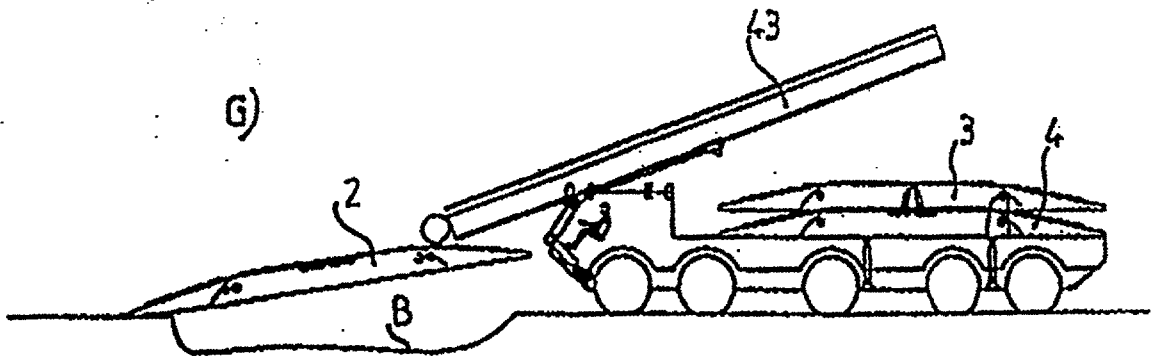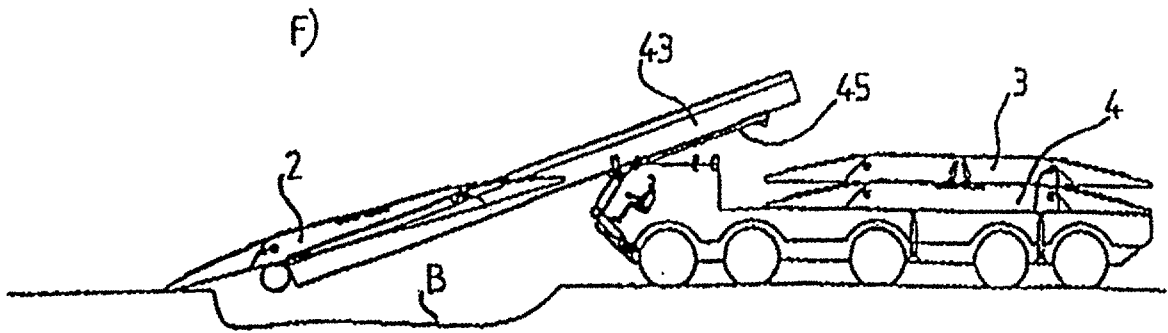

This is the replacement sheet

Date: 13 APR 1997