

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 November 2008 (13.11.2008)

PCT

(10) International Publication Number
WO 2008/136905 A1

(51) International Patent Classification:
E05C 1/08 (2006.01)

[US/US]; One Coreway Drive, P O Box 628, Pioneer,
Ohio 43554-0628 (US).

(21) International Application Number:
PCT/US2008/004857

(74) Agents: SNYDER, Jeffrey L. et al.; Harness, Dickey &
Pierce, P.L.C., P.O. Box 828, Bloomfield Hills, Michigan
48303 (US).

(22) International Filing Date: 15 April 2008 (15.04.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/741,938 30 April 2007 (30.04.2007) US

(71) Applicant (for all designated States except US): UNIVER-
SAL INDUSTRIAL PRODUCTS, INC. [US/US]; One
Coreway Drive, P O Box 628, Pioneer, Ohio 43554-0628
(US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC,
LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN,
MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(72) Inventor; and

(75) Inventor/Applicant (for US only): MARKO, Neil L.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: DOOR LATCH MECHANISM

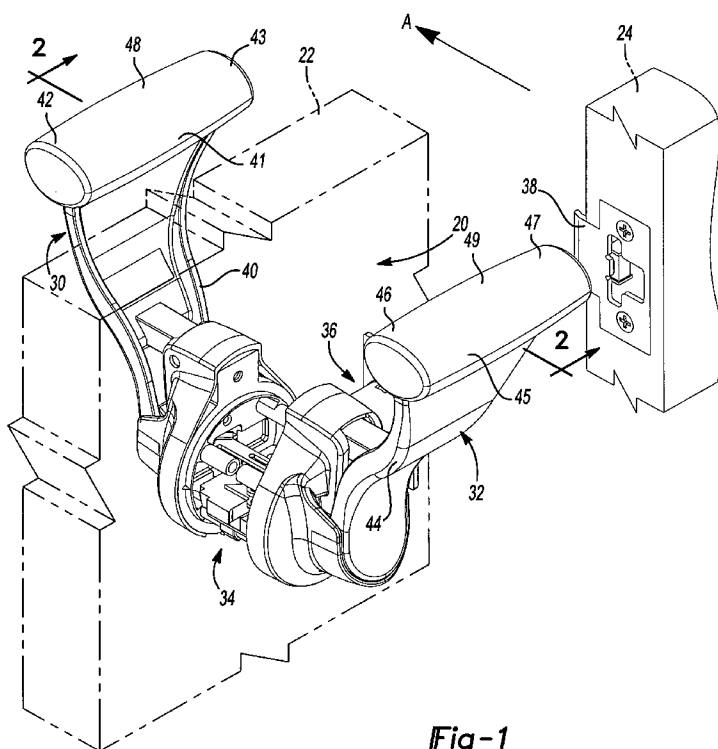


Fig-1

(57) Abstract: The door latch mechanism independently operated by first and second handles of the door handle assembly comprising a cam member having a cam surface which facilitates translation of movement of the handles to displacement of the cam member. The cam member can be coupled to a latch member and move the latch member between an extended and retracted position. A door lock mechanism can prevent displacement of the second door handle while simultaneously allowing displacement of the first door handle.

WO 2008/136905 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*