

FIG. 1

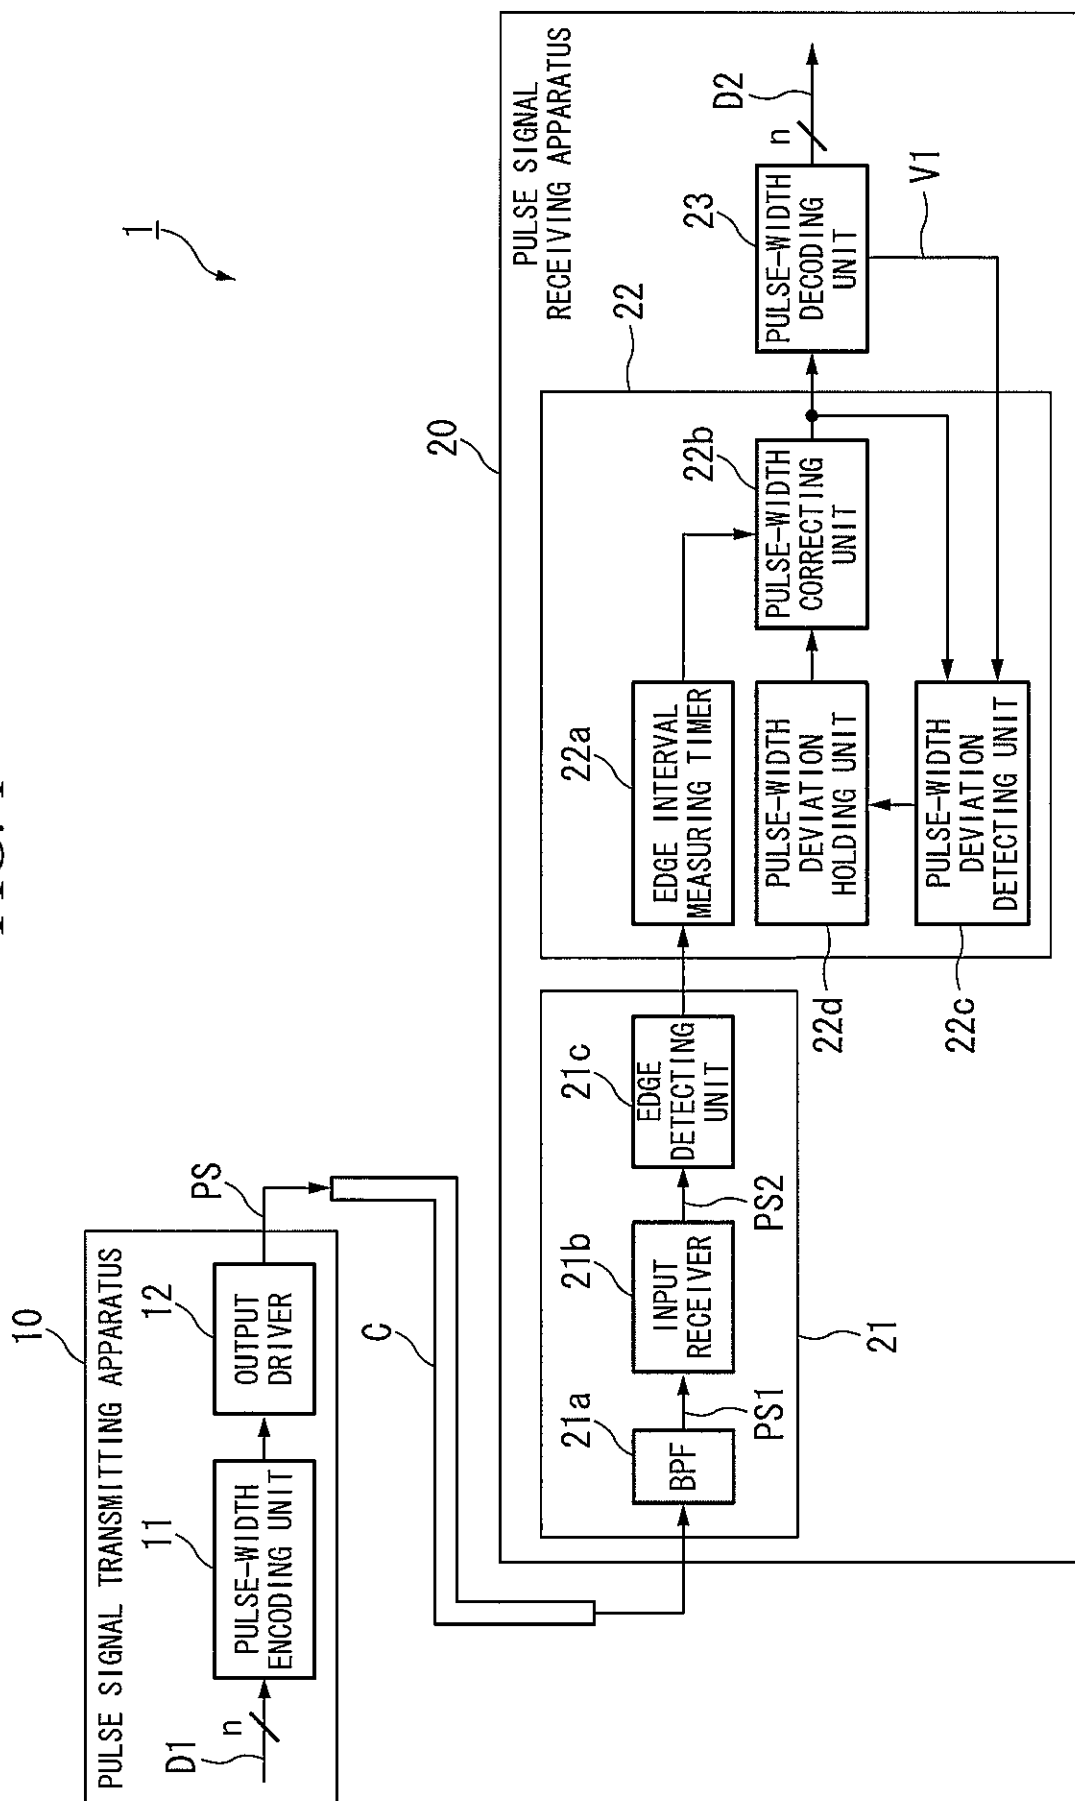


FIG. 2

DIGITAL SIGNAL D1	PULSE-WIDTH REFERENCE VALUE [nsec]
00	600
01	700
10	800
11	900

FIG. 3

	PULSE WIDTH W [nsec]	DIGITAL SIGNAL D2
R1 {	$550 \leq W < 650$	00
R2 {	$650 \leq W < 750$	01
R3 {	$750 \leq W < 850$	10
R4 {	$850 \leq W < 950$	11
	$W < 550, 950 \leq W$	BIT ERROR

FIG. 4

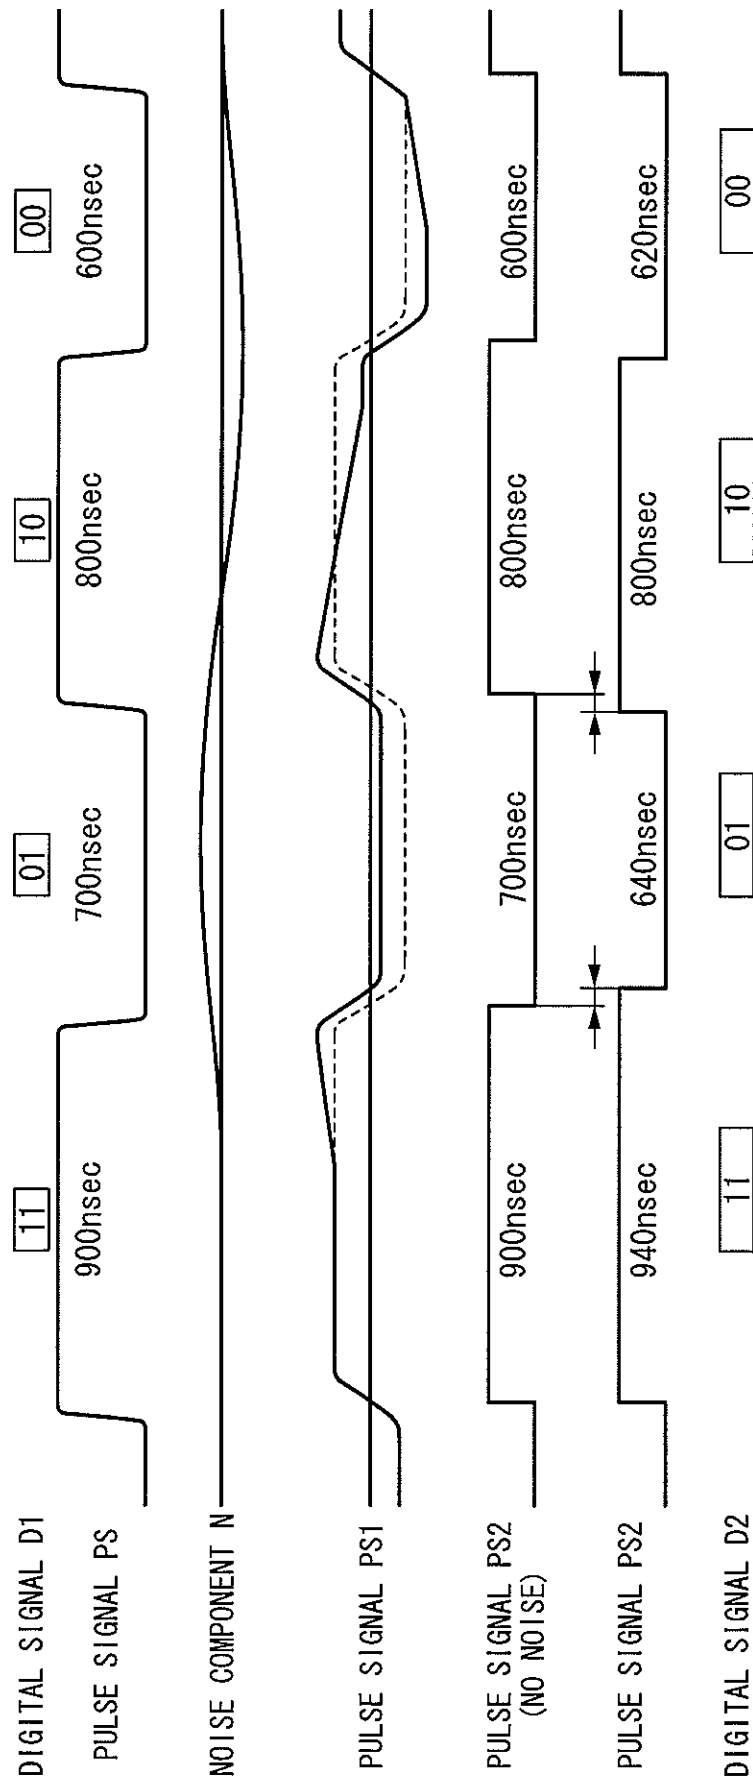


FIG. 5

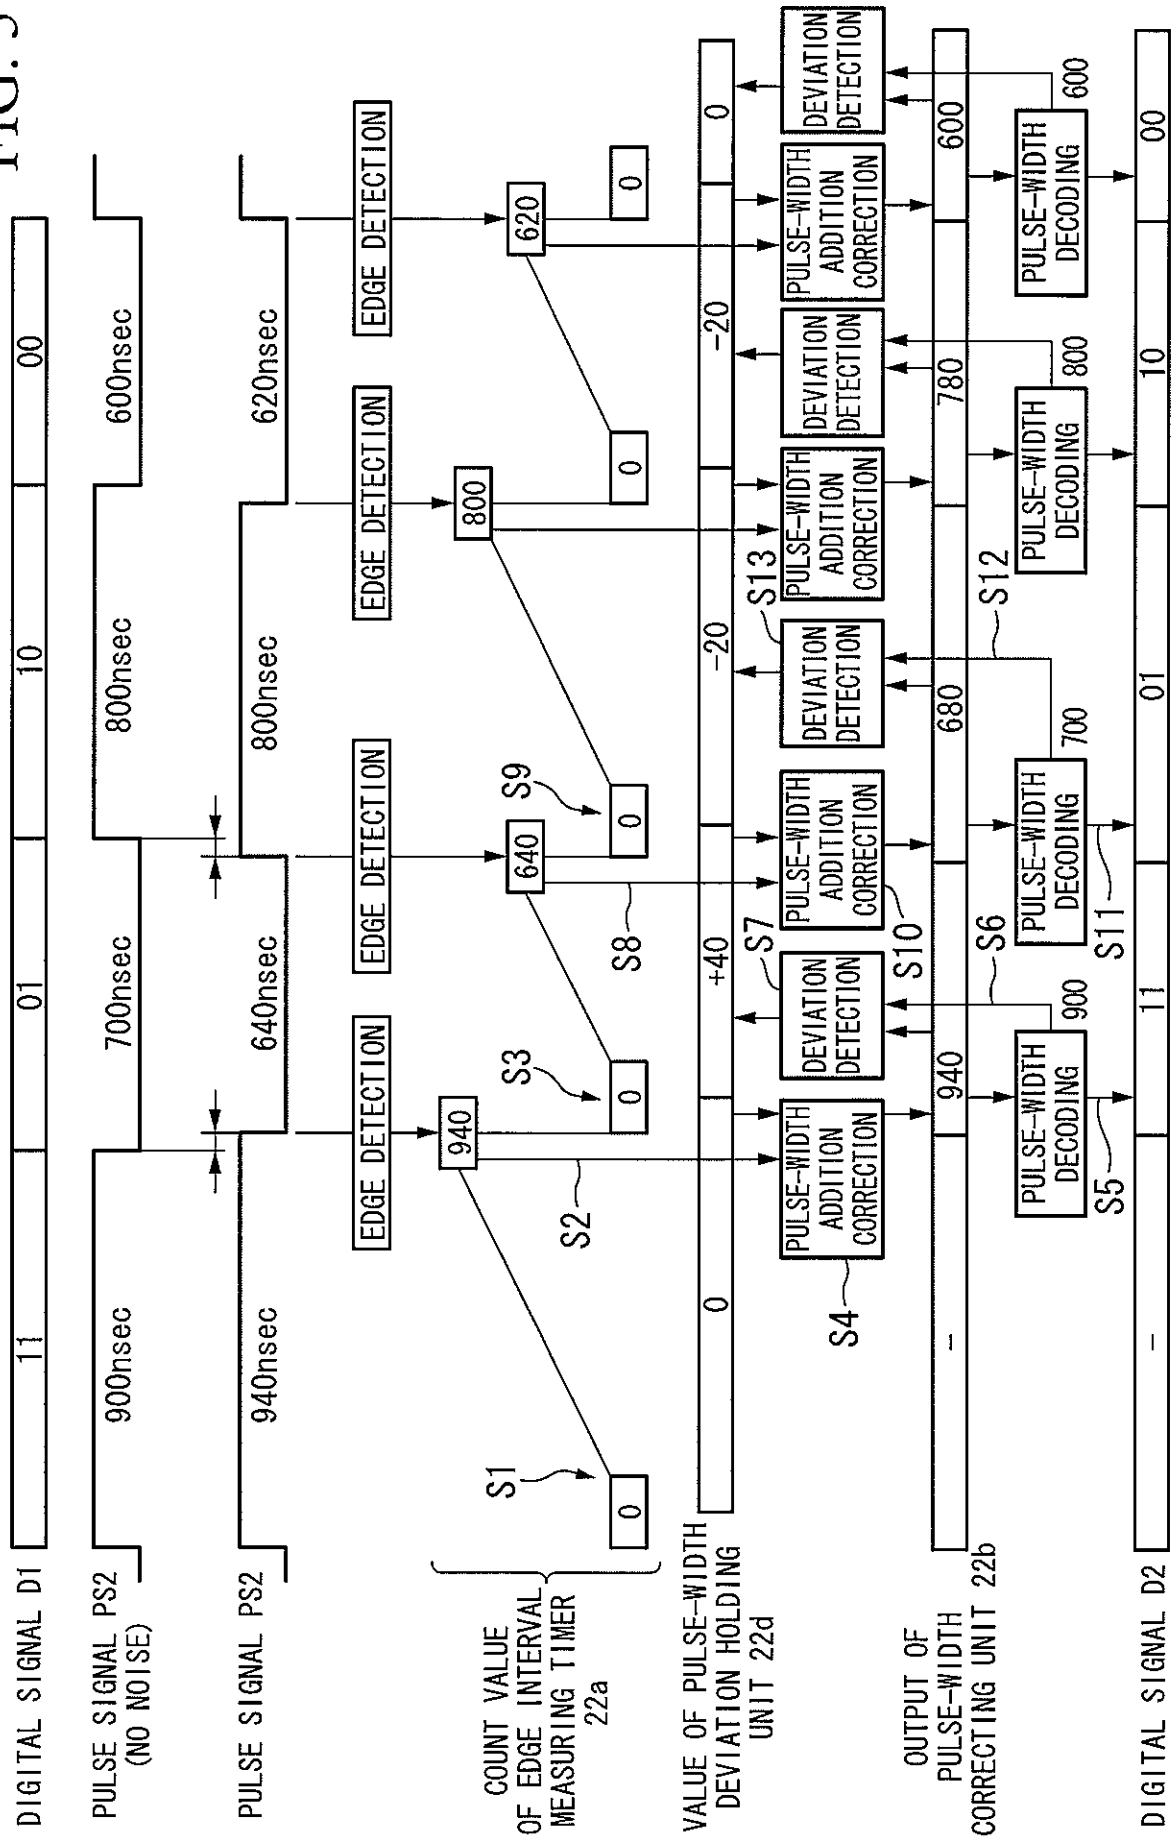


FIG. 6

c

5/6

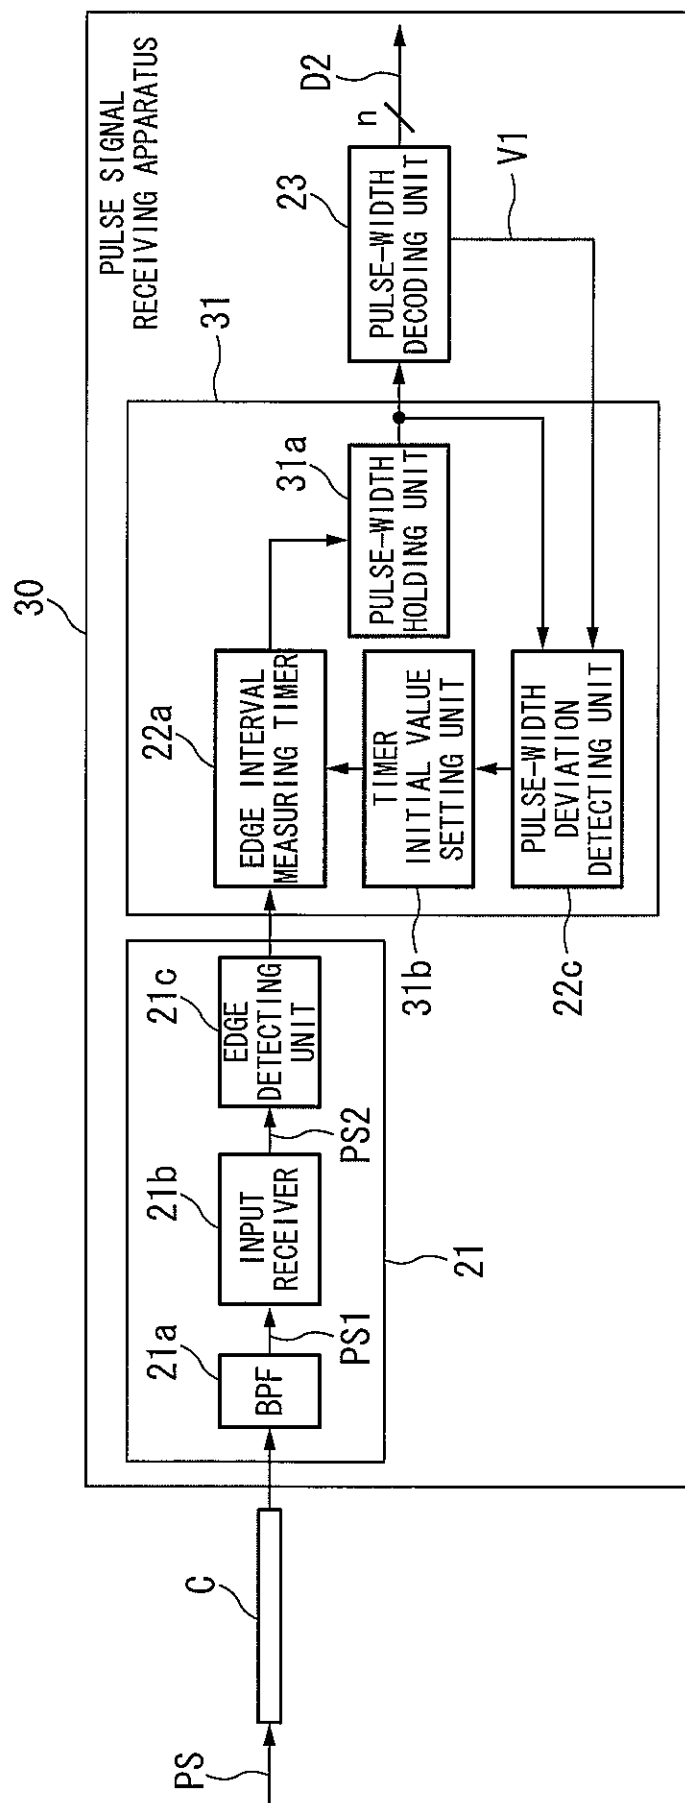


FIG. 7

