



(51) International Patent Classification:

F02K 3/00 (2006.01) *F02C 7/00* (2006.01)
F01D 5/30 (2006.01) *F02C 3/00* (2006.01)
F01D 9/00 (2006.01)

(21) International Application Number:

PCT/US2013/033204

(22) International Filing Date:

21 March 2013 (21.03.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/430,101 26 March 2012 (26.03.2012) US

(71) Applicant: **UNITED TECHNOLOGIES CORPORATION** [US/US]; One Financial Plaza, Hartford, Connecticut 06101 (US).

(72) Inventor: **LUCZAK, Blake J.**; 1826 Bader St., Pittsburgh, Pennsylvania 15212 (US).


(74) Agent: **KOZIARZ, Matthew L.**; Carlson, Gaskey & Olds/Pratt & Whitney, c/o CPA Global, P.O. Box 52050, Minneapolis, Minnesota 55402 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: BLADE WEDGE ATTACHMENT

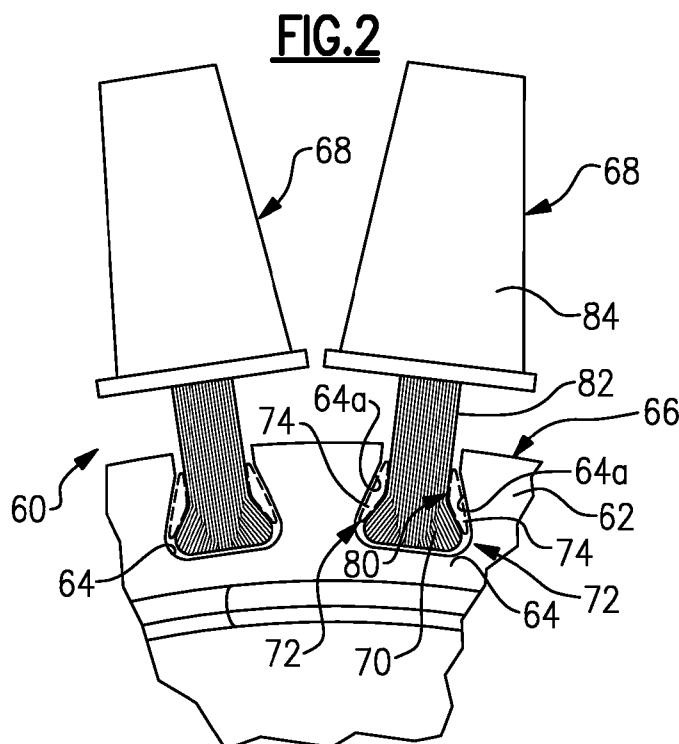

(57) Abstract: A rotor includes a disk that has slots circumferentially arranged around its periphery. Blades include respective roots that are mounted in respective ones of the slots. The roots are smaller than the slots such that there are circumferential gaps between the roots and circumferential sides of the slots. Wedges are respectively located within the circumferential gaps. The wedges are free floating with regard to the blades and the disk.

WO 2013/148445 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*