



(51) International Patent Classification:

H01H 31/00 (2006.01) **H02B 13/035** (2006.01)
H01H 31/28 (2006.01)

(21) International Application Number:

PCT/EP2010/006260

(22) International Filing Date:

13 October 2010 (13.10.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

09012902.4 13 October 2009 (13.10.2009) EP

(71) Applicant (for all designated States except US): **ABB TECHNOLOGY AG** [CH/CH]; Affölternstrasse 44, CH-8050 Zurich (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MILDES, Hartmut** [DE/DE]; Bergstr. 29, 40878 Ratingen (DE). **FUSS-BAHN, Olaf** [DE/DE]; Zum Driegeltrath 48, 40885 Ratingen (DE). **WUILLEMET, Norbert** [DE/DE]; Fritz-Windisch-Str. 89, 40885 Ratingen (DE). **GÖTTLICH, Stefan** [DE/DE]; Turmweg 13, 42799 Leichlingen (DE).

(74) Agent: **SCHMIDT, Karl-Michael**; ABB AG/GF-IP, Oberhausener Straße 33, 40472 Ratingen (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: GAS INSULATED MEDIUM VOLTAGE SWITCHGEAR

Figure 1

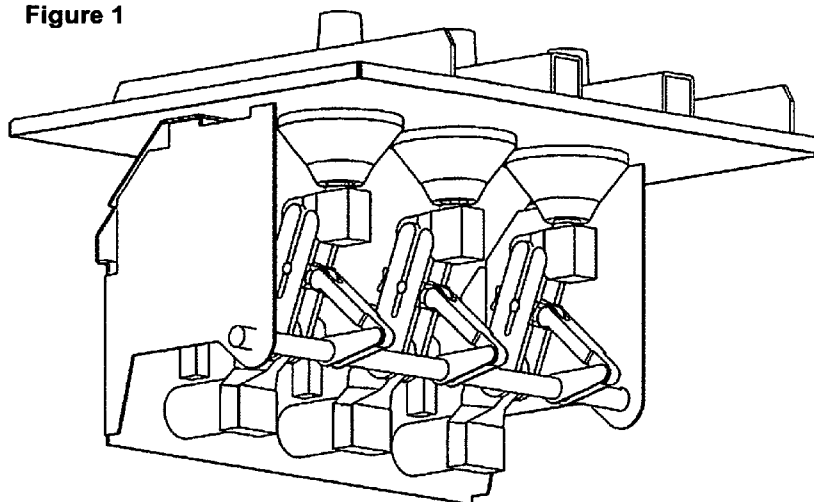

(57) Abstract: The invention relates to a gas insulated medium voltage switchgear with a 3 position disconnector device for 3 electric phases on one common rotatable driveshaft. In order to realize a common construction, the three position disconnector device for three phases is arranged in one common functional unit, which has a base plate and a frame, and which can be mounted in a switchgear housing, in that way, that the baseplate and/or the frame is after the mounting a part of a gastight housing of the switchgear.