



(43) International Publication Date
20 February 2014 (20.02.2014)

(51) International Patent Classification:

A47C 3/16 (2006.01) A47C 15/00 (2006.01)
A47C 9/00 (2006.01)

(21) International Application Number:

PCT/IB2012/054164

(22) International Filing Date:

15 August 2012 (15.08.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(72) Inventor; and

(71) Applicant : KIM THI PHAM, Loan [VN/VN]; Attn: Le Binh Phuong, A04.04 CC Hoang Anh Gia Lai 1, 357 Le Van Luong street, Tan Quy ward, Dist. 7, Ho Chi Minh, 000000 (VN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,

KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the identity of the inventor (Rule 4.17(i))

Published:

— with international search report (Art. 21(3))

(54) Title: A SITTING DEVICE FOR PREVENTION OF SPINAL DISEASES

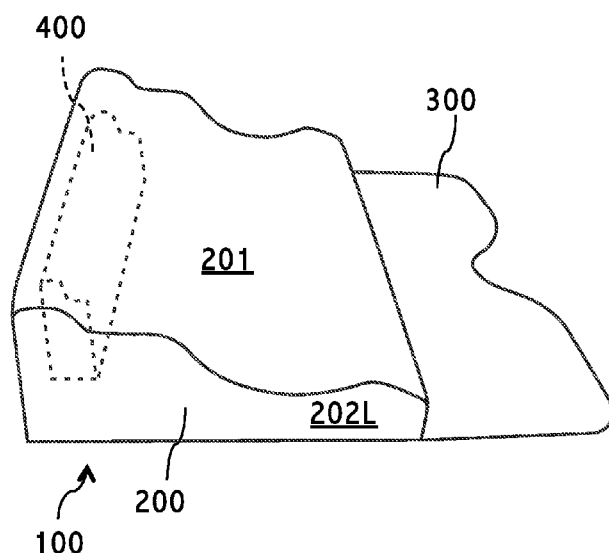


FIG. 1

(57) Abstract: A sitting device (100) for prevention of spinal diseases comprises a padded member (200), a thin pad (300) extended forwardly from the padded member (200), and a hard block (400) fully inserted inside the padded member (200). The padded member (200) has a generally right triangular shape, and is made of resilient materials. The hypotenuse surface (201) of the padded member (200) is undulating economically. The hard block (400) is made of a non-resilient material, and is able to tolerate, without rupturing, the gravity force on a mass of an adult's body with a shape and size similar to those of the adult's buttocks. The hard block (400) is inserted completely inside the right angle area of the padded member (200). The height (H) of the front side (403) of the hard block (400) is greater than the distance from the lowest point of the sitter's coccyx to the lowest point of his tuberosity of ischium. Both the padded member (200) and the hard block (400) have a flat bottom side to ensure stability.