(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 March 2013 (28.03.2013)

WIPO | PCT

(10) International Publication Number
WO 2013/044172 A1

(51) International Patent Classification:
A61M 5/20 (2006.01)

(21) International Application Number:
PCT/US2012/056756

(22) International Filing Date:
21 September 2012 (21.09.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/538,098 22 September 2011 (22.09.2011) US
61/695,911 31 August 2012 (31.08.2012) US

(71) Applicant: **ABBVIE INC.** [US/US]; 1 N Waukegan Road, North Chicago, IL 60064 (US).

(72) Inventor: **SHANG, Sherwin, S.**; 346 Southgate Drive, Vernon Hills, IL 60061 (US).

(74) Agents: **HULSEBERG, Daniel, J.** et al.; Baker Botts LLP, 30 Rockefeller Plaza, New York, NY 10112-4498 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(54) **Title**: AUTOMATIC INJECTION DEVICE

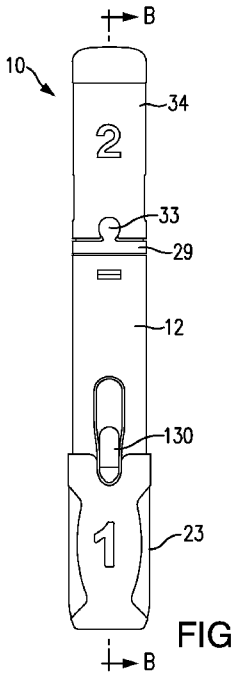


FIG. 1A

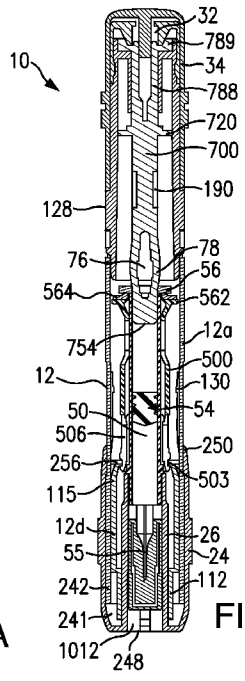


FIG. 1B

(57) **Abstract**: Automatic injection device includes a housing, a syringe, a plunger, and a syringe carrier. The housing includes a barrel between a first end and a second end. The barrel includes an elongated window to allow viewing of contents inside the housing. The syringe is disposed within the housing and has a reservoir. The plunger is at least partially disposed within the syringe and includes a visual indicator. The syringe carrier is disposed within the housing and configured to contain the syringe and displace the syringe within the housing between a first position and a second position. The syringe carrier can be substantially transparent. The syringe carrier can have first and second legs and an extension disposed therebetween, and at least a portion of the extension can be configured to align with the window and the reservoir when the syringe carrier is in the first position.

WO 2013/044172 A1