

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2001 (10.05.2001)

PCT

(10) International Publication Number
WO 01/32268 A1

(51) International Patent Classification: A62C 37/08

(21) International Application Number: PCT/FI00/00949

(22) International Filing Date:
1 November 2000 (01.11.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
19992366 2 November 1999 (02.11.1999) FI

(71) Applicant and

(72) Inventor: SUNDHOLM, Göran [FI/FI]; Ilmari Kiannon
kuja 3, FIN-04310 Tuusula (FI).

(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O.
Box 148, FIN-00121 Helsinki (FI).

(81) Designated States (national): AE, AG, AL, AM, AT, AT
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INSTALLATION FOR FIGHTING FIRE

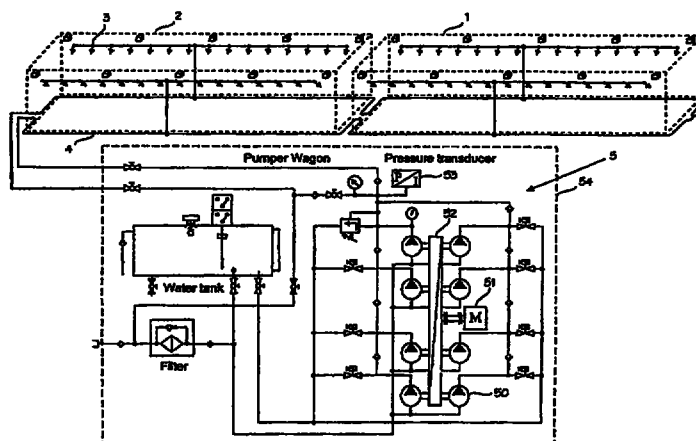

(57) Abstract: The invention relates to an installation for fighting fire in a unit, preferably a train with at least one railway carriage, or a tunnel, the installation comprising several spray heads whereof a number that is smaller than the total number of spray heads can be activated according to the location of the fire in the unit, and a drive source for delivering extinguishing medium through a pipe system to the activated spray heads, the drive source comprising a pump unit including a pump in order to provide by an effect of the pump unit a pumping pressure for pumping extinguishing medium into the activated spray head/head, the pump unit comprising a control unit arranged to increase the extinguishing medium flow of the pump unit when the number of releasing spray heads increases. In order to provide a powerful and increased delivery of extinguishing medium from the active spray heads in such a case that only some of the spray heads in the installation are released, the control unit (52, 53) is arranged to increase the extinguishing medium flow of the pump unit (50, 51) in such a way that the effect of the pump unit is substantially kept constant.