

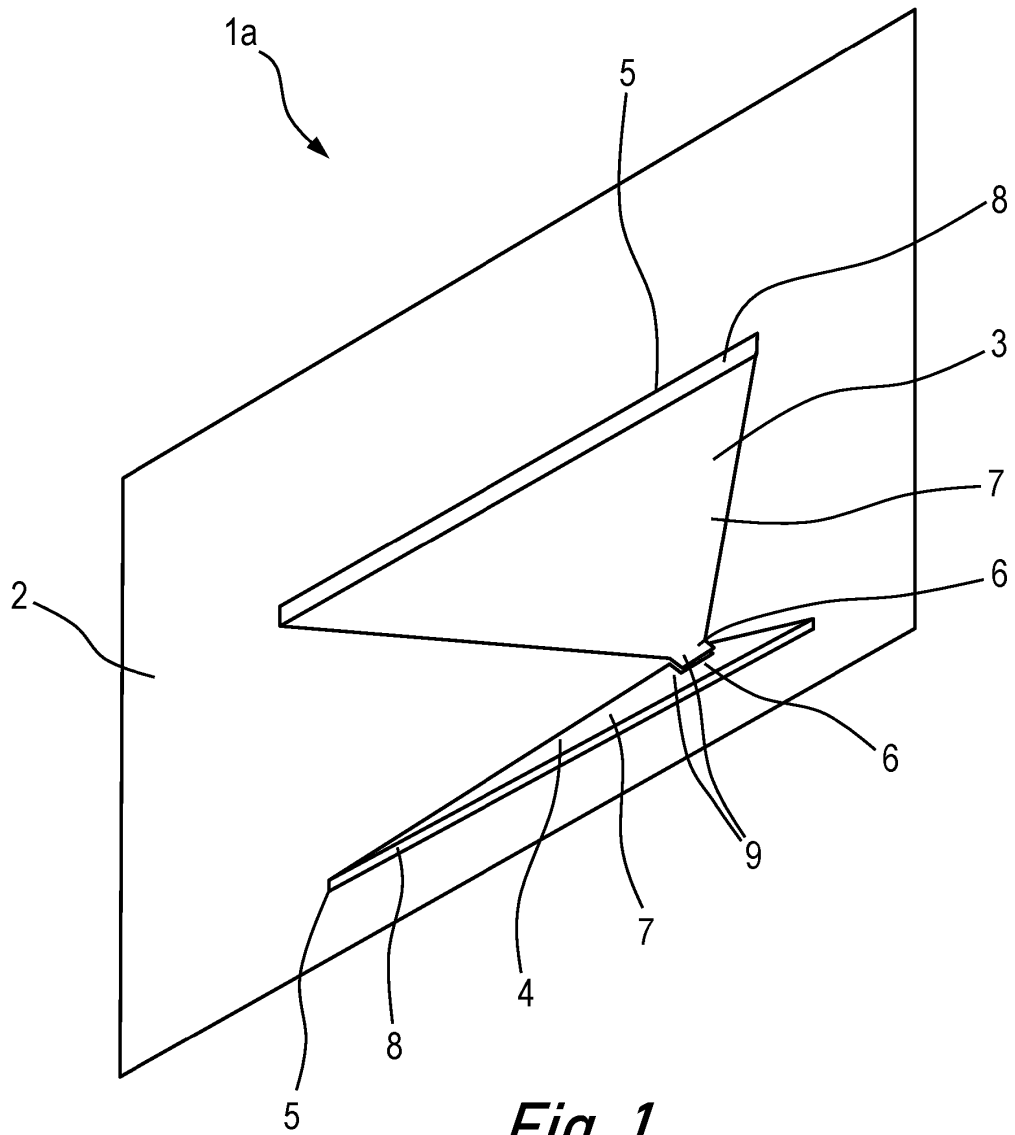


Fig. 1

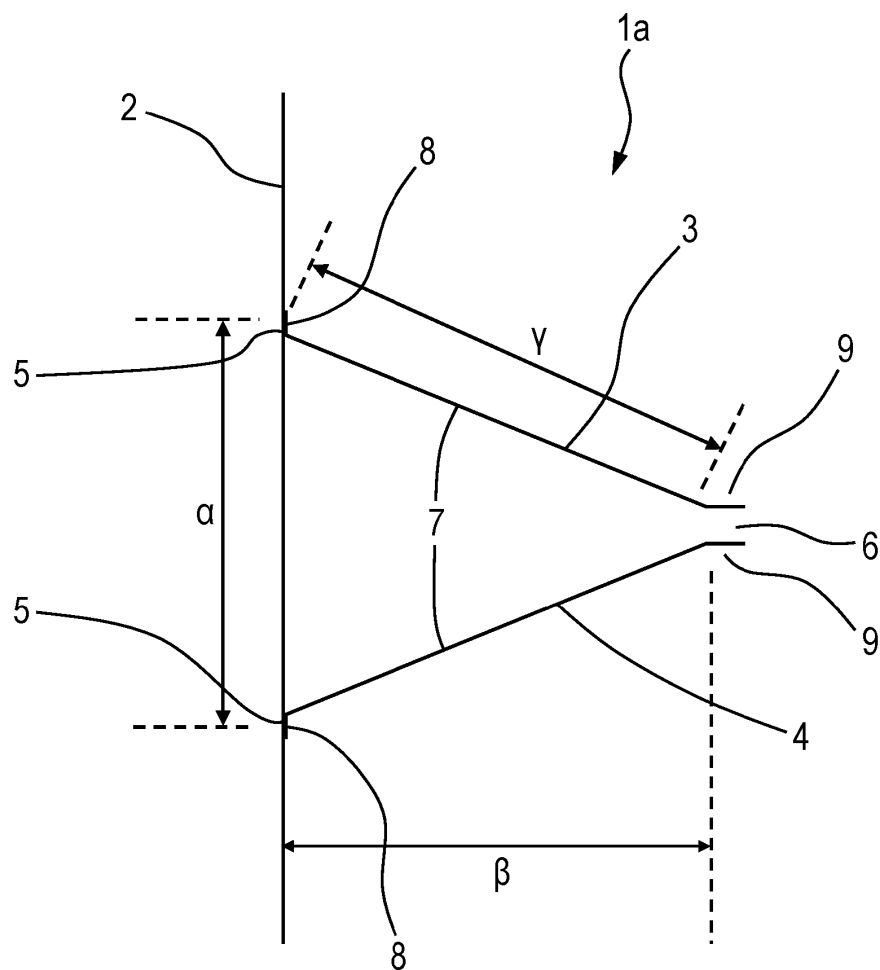


Fig. 2

3/16

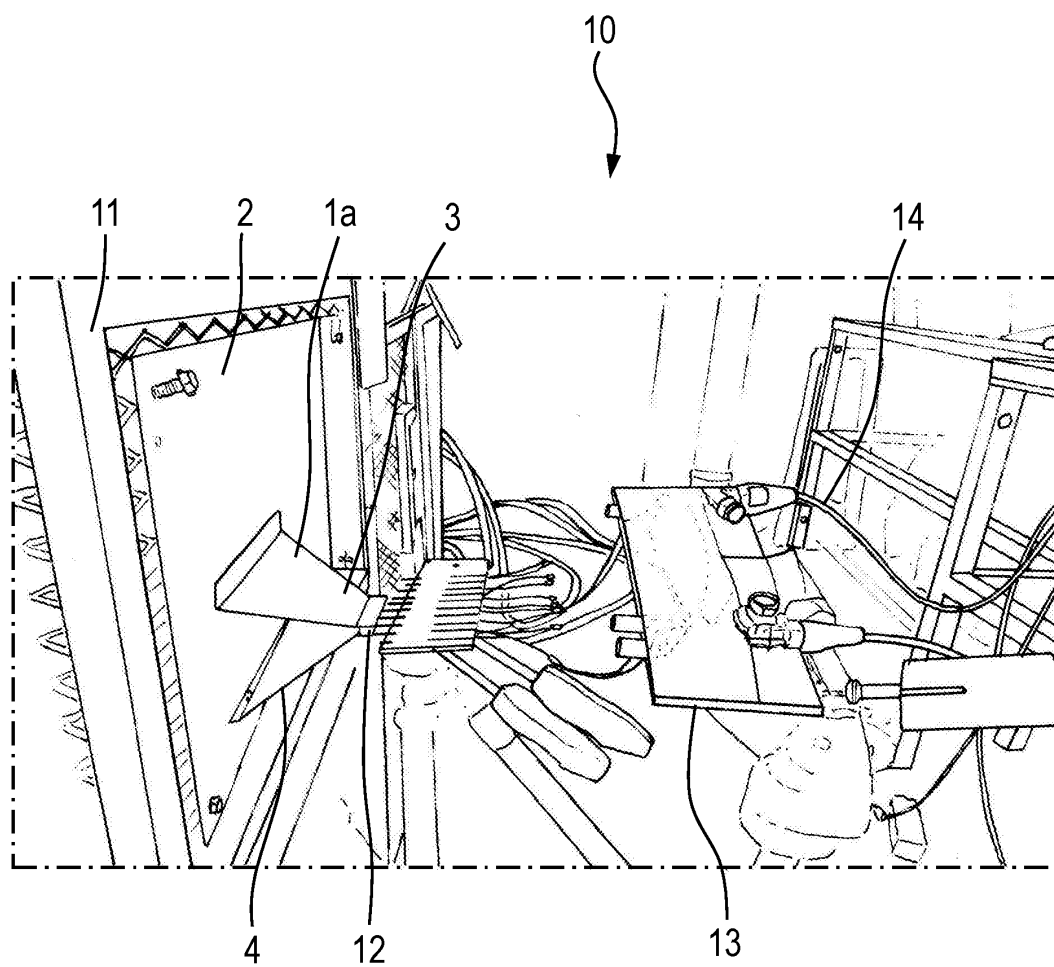


Fig. 3

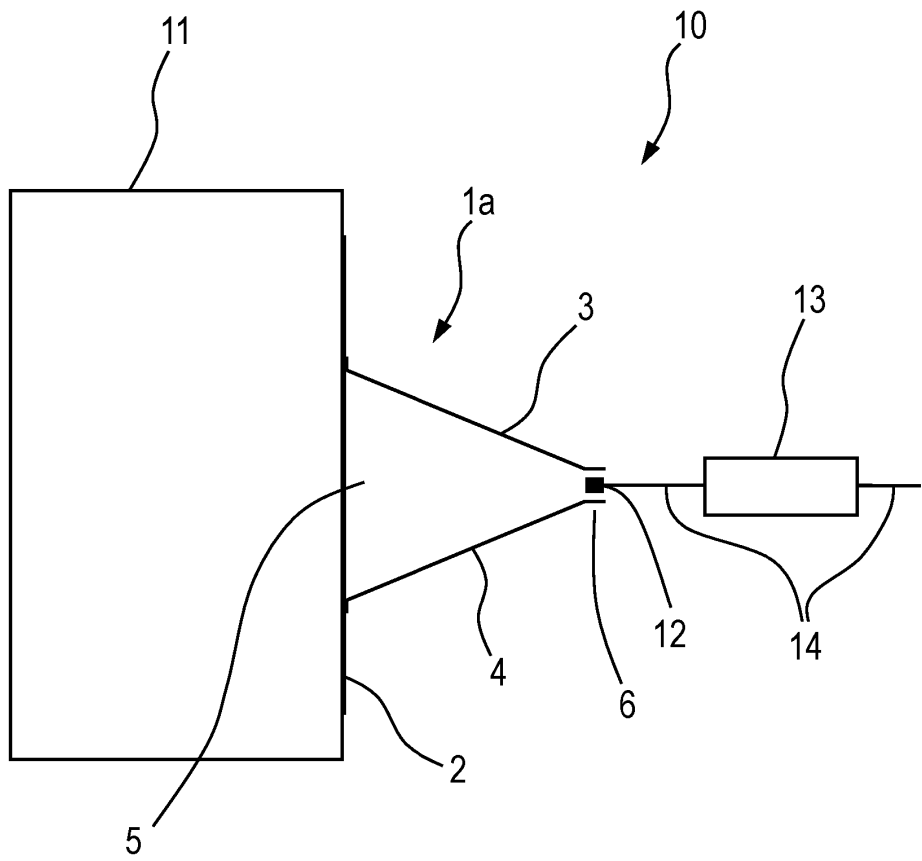
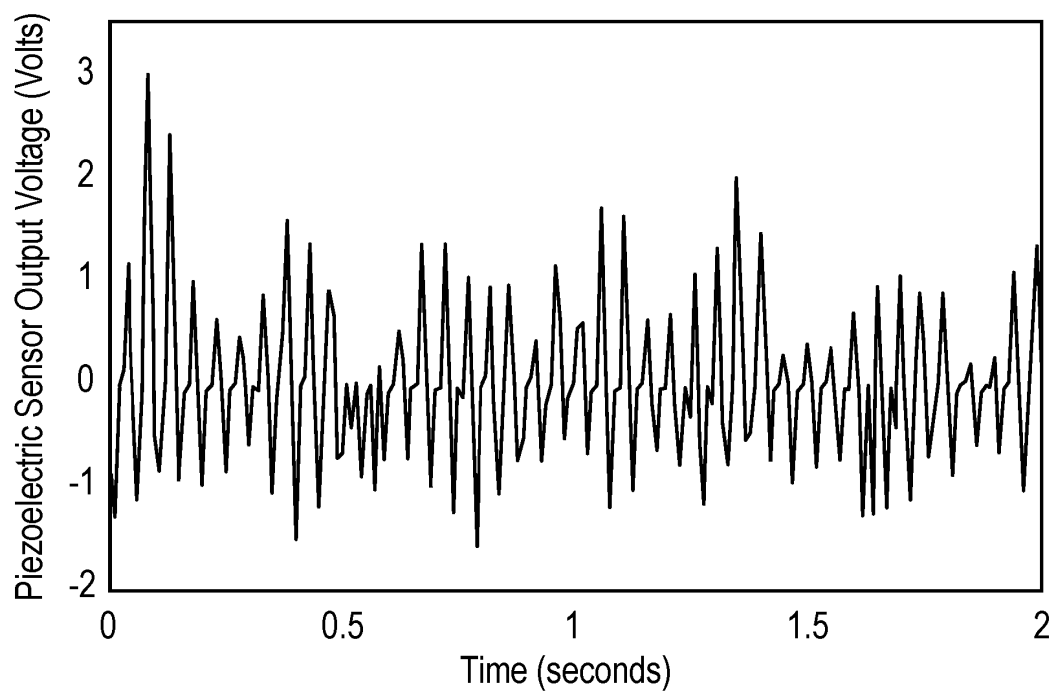
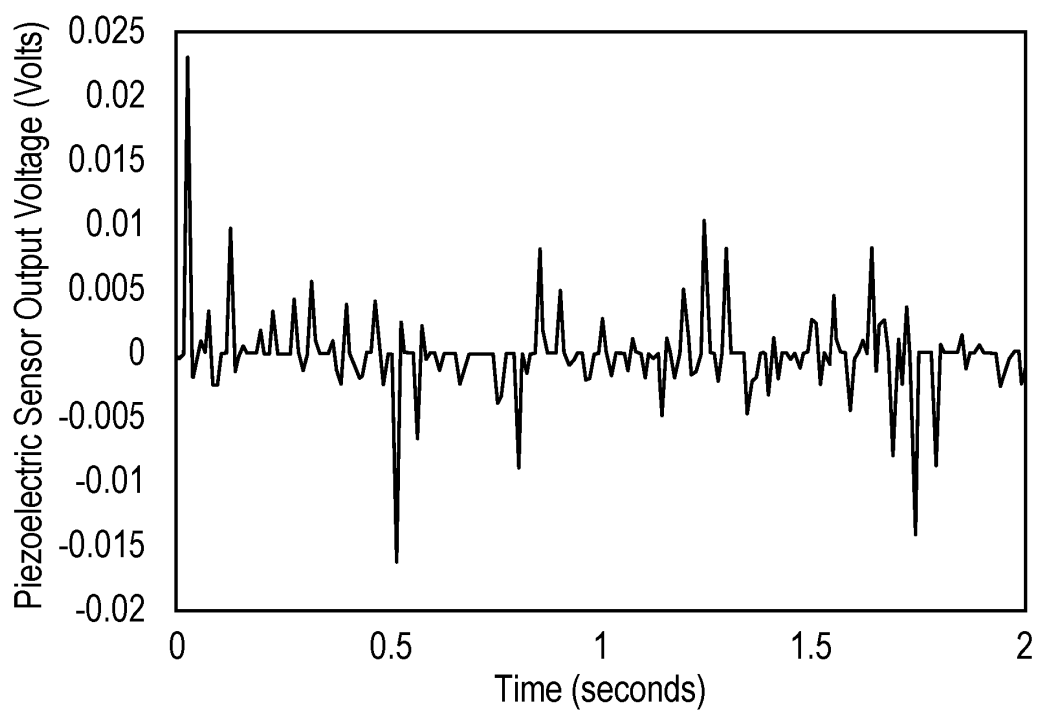
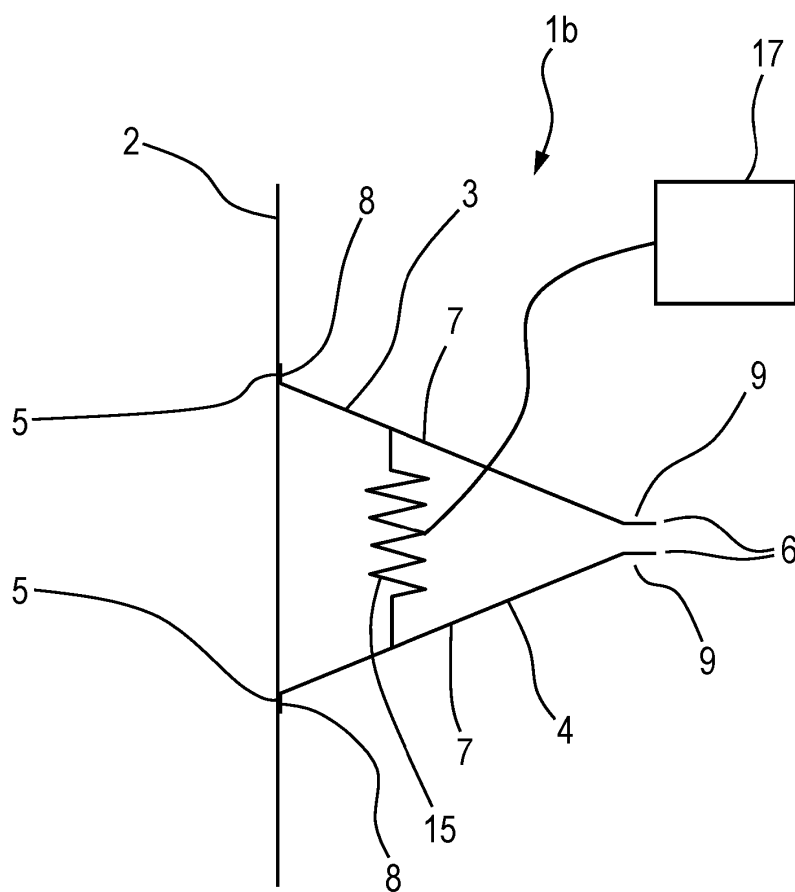


Fig. 4

5/16

*Fig. 5A**Fig. 5B*

6/16

*Fig. 6*

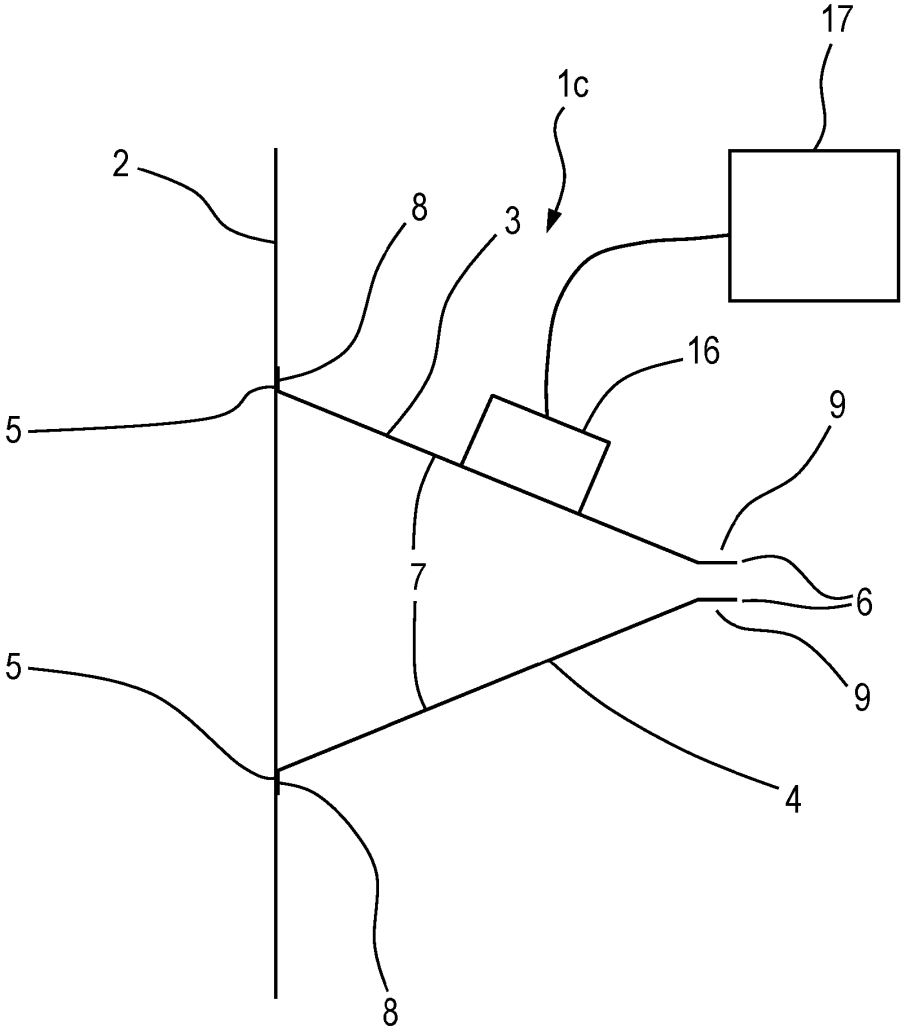


Fig. 7

8/16

Determine Characteristics of a Vibration Source	S1001
Determine Optimum Parameters (e.g. α , β and γ) for a Vibrational Lens for use with the Vibrational Source (S1001)	S1002
Provide the Vibrational Lens according to the Optimum Parameters (S1002)	S1003

Fig. 8

9/16

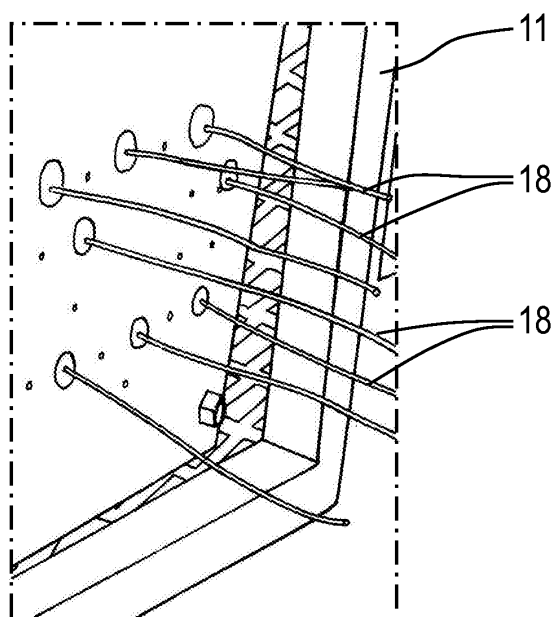


Fig. 9

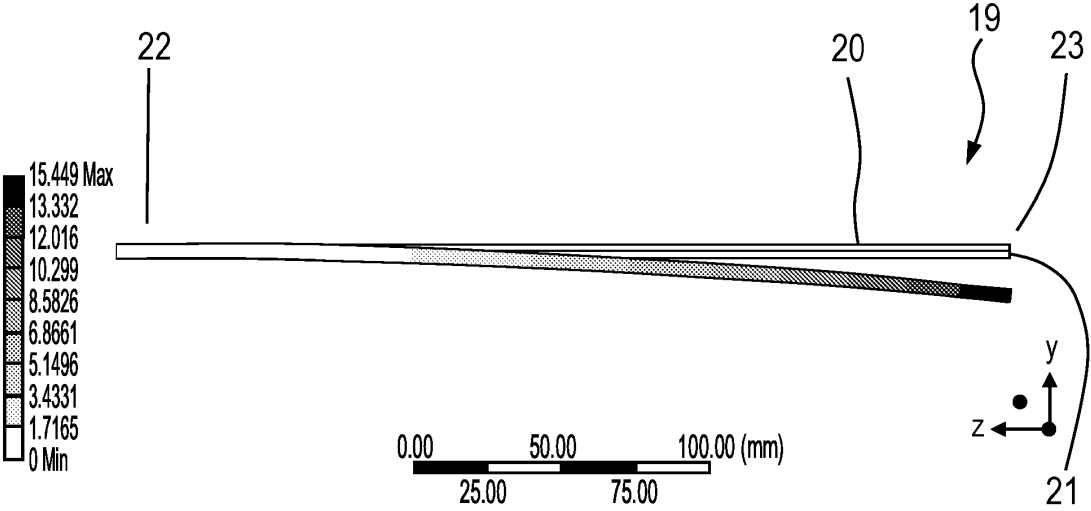


Fig. 10

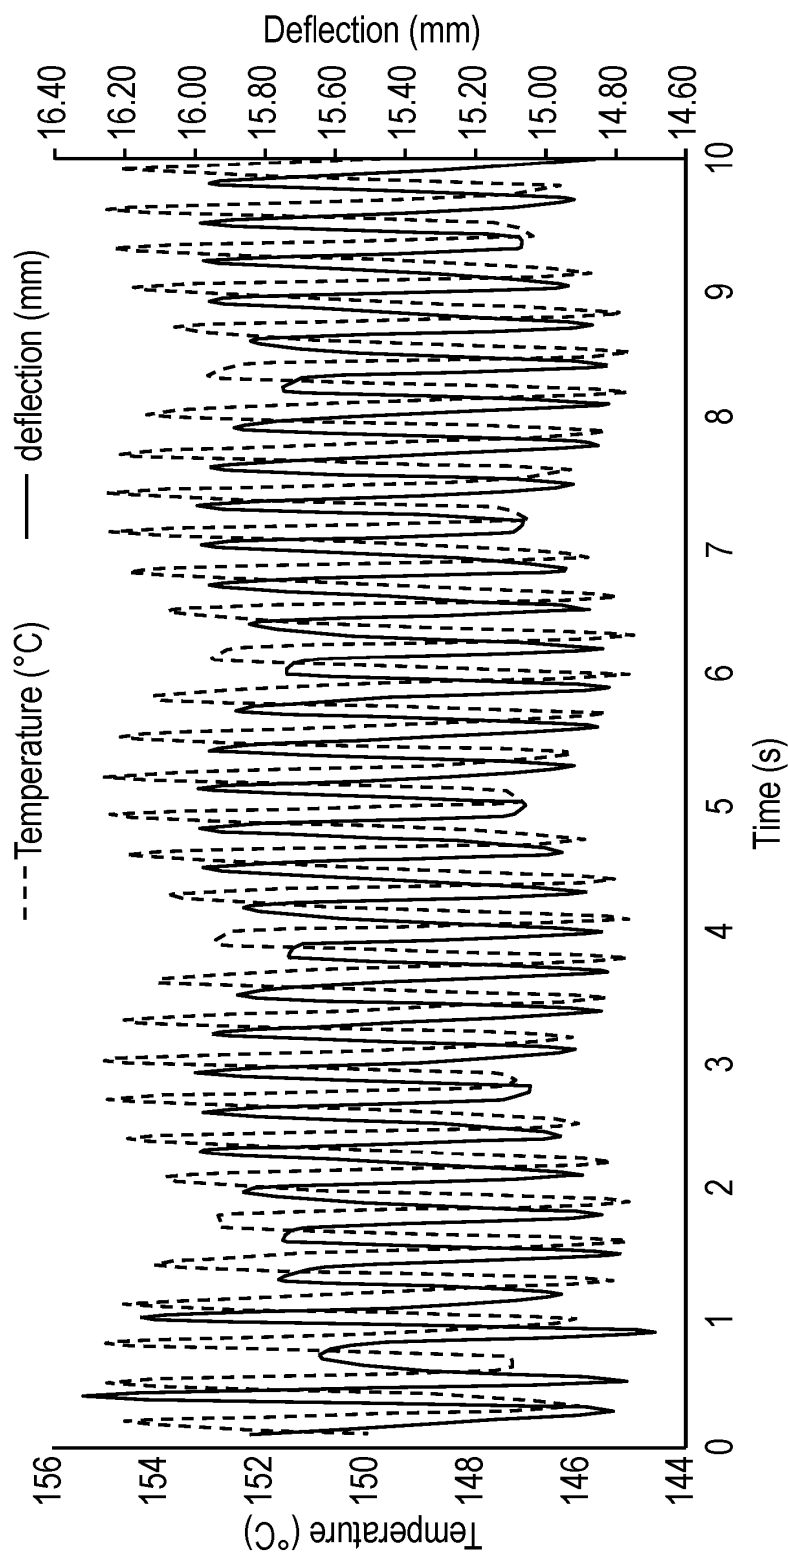
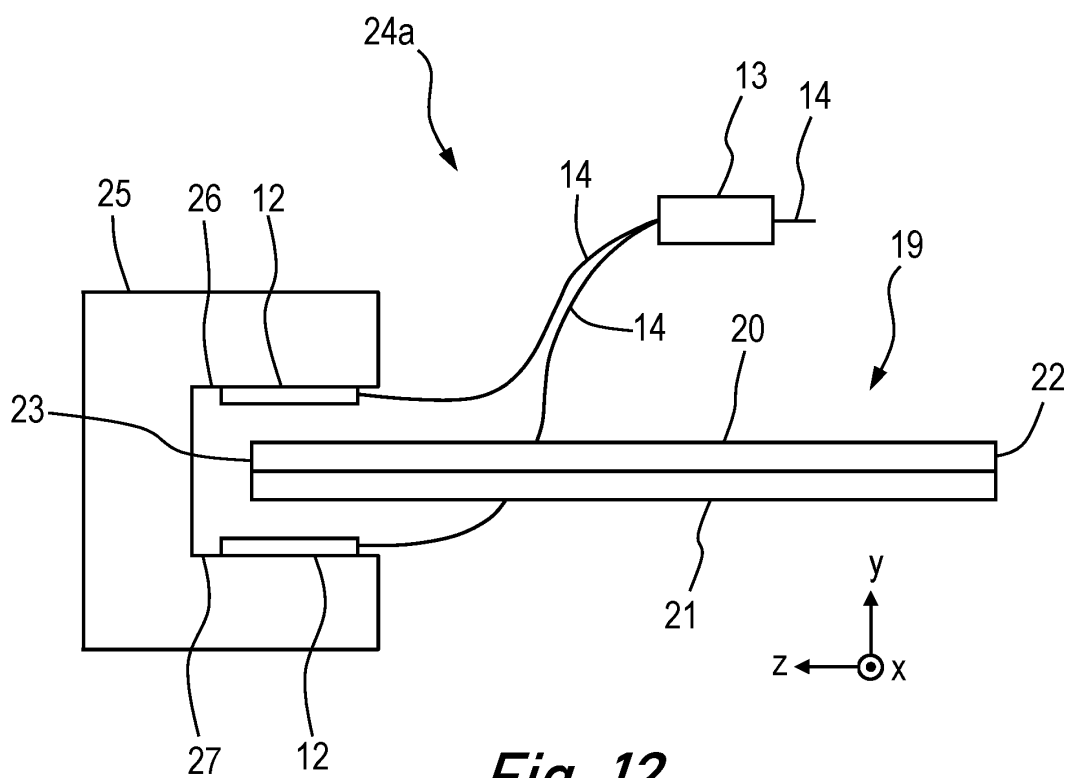


Fig. 11

12/16

***Fig. 12***

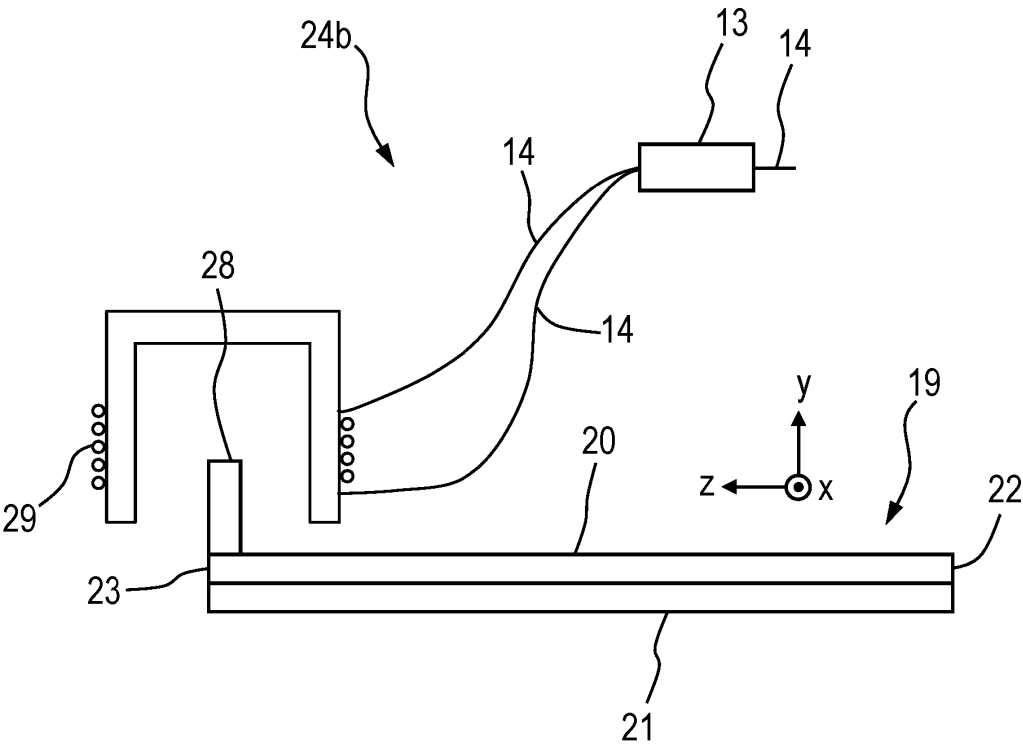


Fig. 13

14/16

Determine Characteristics of a Cyclic Temperature Variation	S2001
Determine Optimum Parameters (x, y, z dimensions, material of layers) for a Bimetallic Strip for use with the Cyclic Temperature Variation (S2001)	S2002
Provide the Bimetallic Strip according to the Optimum Parameters (S2002)	S2003

Fig. 14

15/16

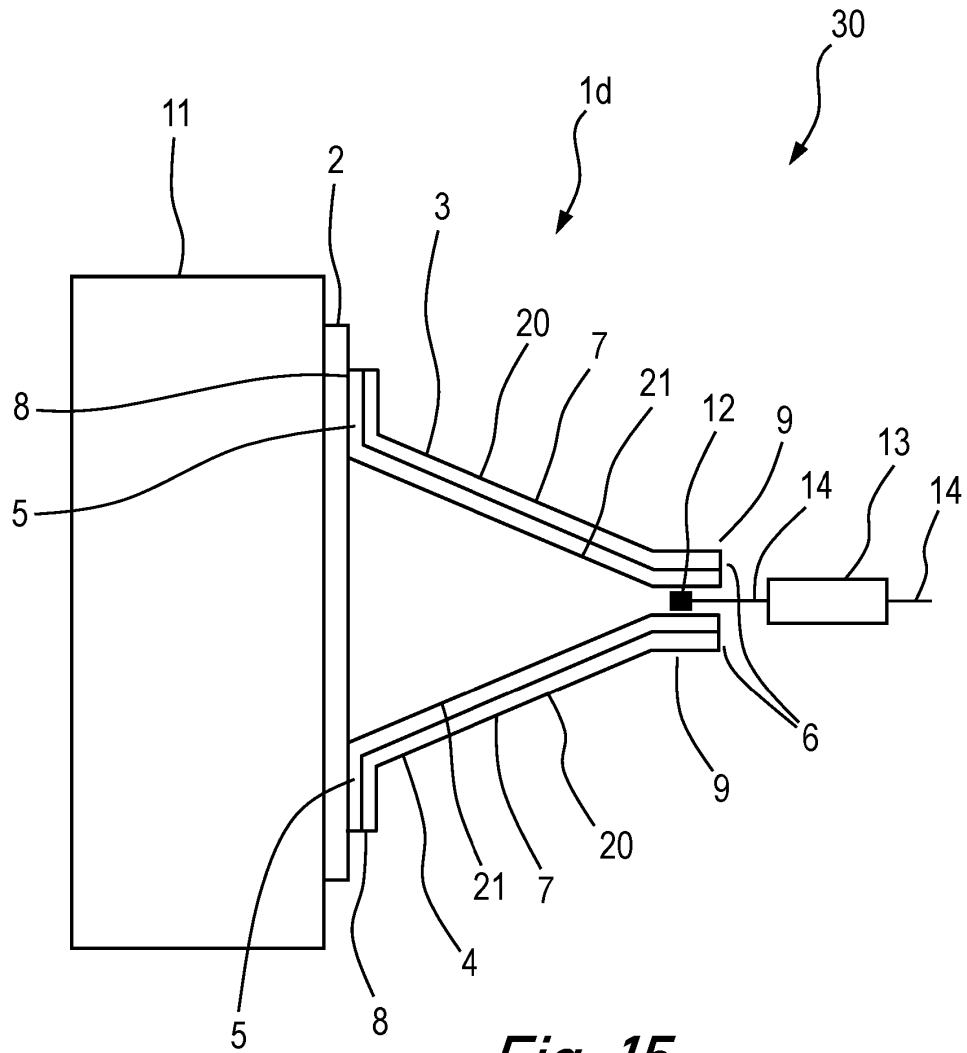


Fig. 15

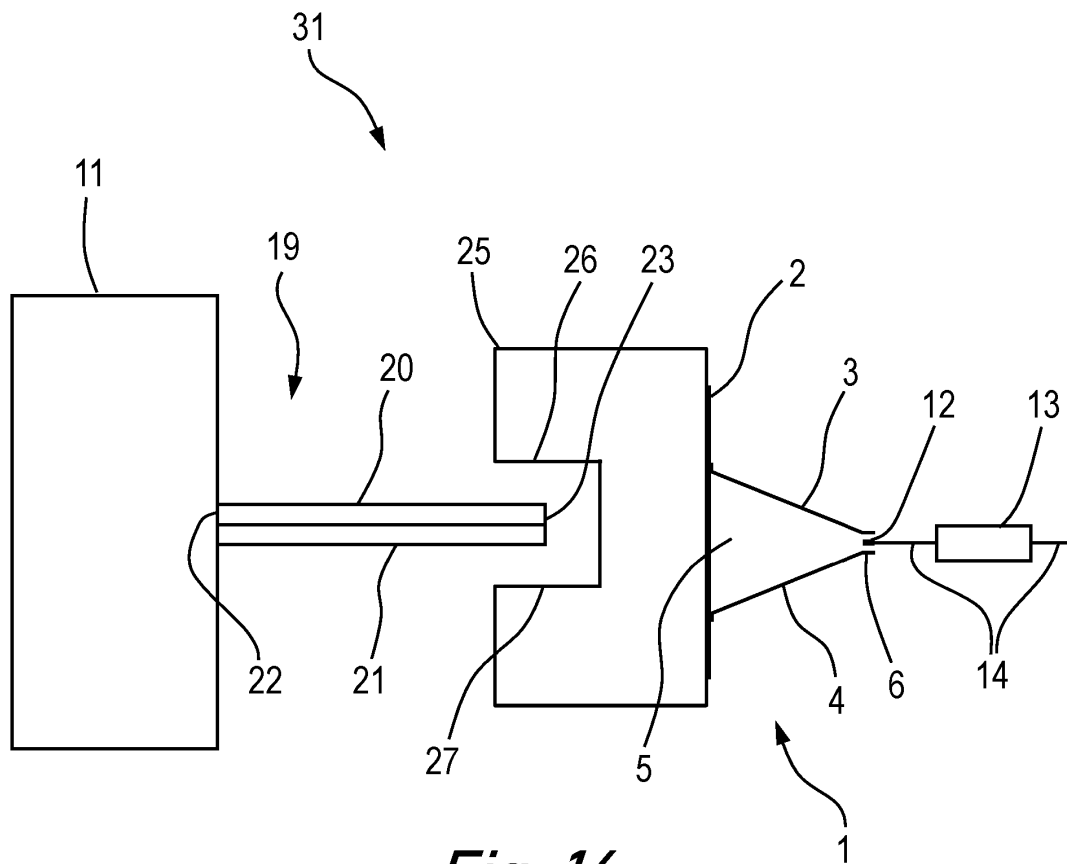


Fig. 16