

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
12 September 2019 (12.09.2019)



(10) International Publication Number
WO 2019/172753 A1

(51) International Patent Classification:

E21D 11/38 (2006.01) *E02D 29/16* (2006.01)
E21F 17/18 (2006.01)

(21) International Application Number:

PCT/NL2019/050138

(22) International Filing Date:

06 March 2019 (06.03.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2020541 06 March 2018 (06.03.2018) NL

(71) Applicant: **FUGRO N.V.** [NL/NL]; Veurse Achterweg 10,
2264 SG Leidschendam (NL).

(72) Inventors: **JONGSMA, Arnoud Marc**; Kromme Spier-
ingweg 298, 2141 BV Vijfhuizen (NL). **VAN WEEREN,**
Dennis; Fedoralaan 31, 2152 DE Nieu Venneep (NL).

(74) Agent: **NEDERLANDSCH OCTROOIBUREAU**
(NLO); P.O. Box 29720, 2502 LS The Hague (NL).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: POSITION MONITORING OF A GASKET BETWEEN TUNNEL SEGMENTS

Fig. 2B

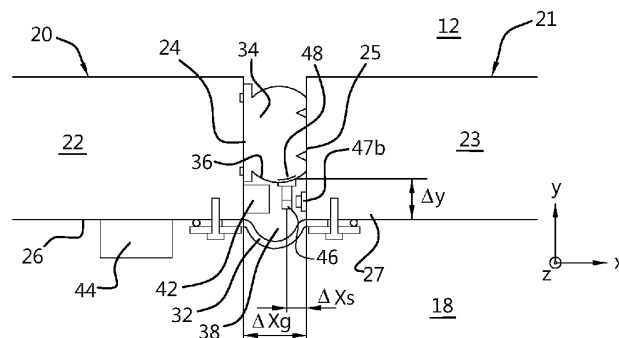

(57) Abstract: A method and sensor system for monitoring in time a geometric property of a gasket (32, 34) that sealingly interconnects two structural members (20, 21) of a subterranean or immersed tunnel (10). The system includes a sensor (42) for measuring position indications for surface portions (48) of the gasket relative to a reference (26, 27, 47) associated with one or both structural members, and a processor (44) that is coupled with the sensor to receive the position indications. The processor is configured to derive indications of displacement (ΔY) for each of the gasket surface portions based on the measured indications of position, to compare the indications of displacement for each of the gasket surface portions with at least one threshold value (T_y), and to generate a warning message for an operator if at least one of the indications of displacement transgresses the at least one threshold value.



WO 2019/172753 A1