

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
28 December 2000 (28.12.2000)

PCT

(10) International Publication Number
WO 00/79475 A2

- (51) International Patent Classification⁷: G06K 11/00
(21) International Application Number: PCT/JP00/03826
(22) International Filing Date: 13 June 2000 (13.06.2000)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
11/170711 17 June 1999 (17.06.1999) JP
(71) Applicant (for all designated States except US): NISSHA
PRINTING CO., LTD. [JP/JP]; 3, Mibu Hanai-cho, Nakagyo-ku, Kyoto-shi, Kyoto 604-8551 (JP).
(72) Inventors; and
(75) Inventors/Applicants (for US only): NISHIKAWA, Kazuhiro [JP/JP]; Nissha Printing Co., Ltd., 3, Mibu Hanai-cho, Nakagyo-ku, Kyoto-shi, Kyoto 604-8551 (JP).
(74) Agents: AOYAMA, Tamotsu et al.; Aoyama & Partners, IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540-0001 (JP).
(81) Designated States (national): CA, CN, IN, KR, SG, US.
(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
Published:
— Without international search report and to be republished upon receipt of that report.

(54) Title: HIGH-RELIABILITY TOUCH PANEL

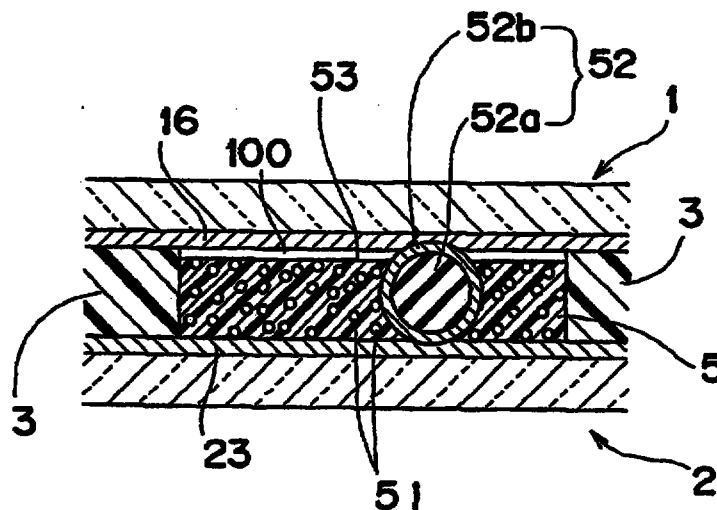

(57) Abstract: In the touch panel of an analog resistance film form having independent connection electrodes to be connected via a conductive adhesive (5) to lead electrodes (13, 14) set to an opposing panel, the conductive adhesive is made up of a main conductive filler (51) of flakes or spheres of a particle size of 1-20 μm or short fibers of a length of 1-20 μm and a spherical auxiliary conductive filler (52) having an insulating core material (52a) coated with a conductive layer (52b) and a larger particle size by 10-100 μm than a minimum distance of contact faces of the electrodes, both fillers dispersed in a binder, whereby the auxiliary conductive filler is always kept in touch with the lead electrodes and connection electrodes.

WO 00/79475 A2