(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/003877 A2

(51) International Patent Classification[7]: G09G

(74) Agents: SUZUYE, Takehiko et al.; c/o SUZUYE & SUZUYE, 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 100-0013 (JP).

(21) International Application Number:
PCT/JP2003/008153

(22) International Filing Date: 27 June 2003 (27.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002-187803 27 June 2002 (27.06.2002) JP

(71) Applicant *(for all designated States except US)*: CASIO COMPUTER CO., LTD. [JP/JP]; 6-2, Hon-machi 1-chome, Shibuya-ku, Tokyo 151-8543 (JP).

(71) Applicant and
(72) Inventor: HATTORI, Reiji [JP/JP]; 200-1-109, Meihamamachi, Nishi-ku, Fukuoka-shi, Fukuoka 819-0004 (JP).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *without international search report and to be republished upon receipt of that report*

[Continued on next page]

(54) Title: CURRENT DRIVE APPARATUS AND DRIVE METHOD THEREOF, AND DISPLAY APPARATUS USING THE APPARATUS

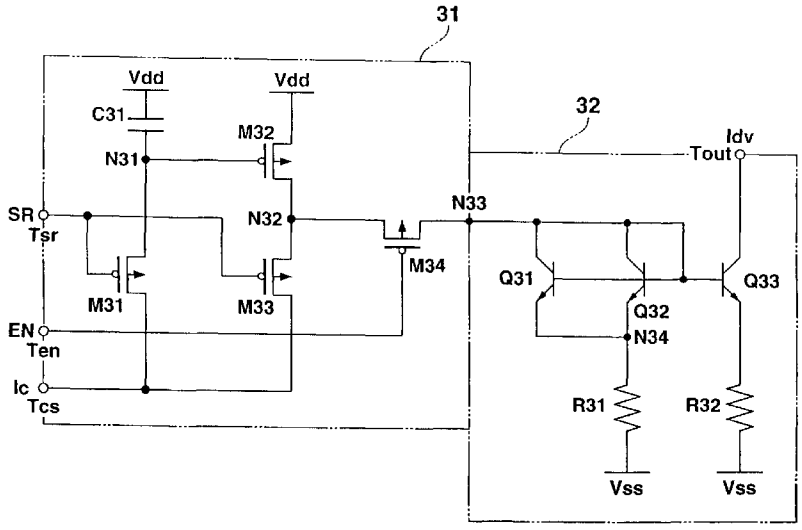

(57) Abstract: A current drive apparatus operates a plurality of loads by applying a current thereto. The apparatus includes a plurality of output terminals (Tout) to which the loads are respectively connected. A single current generation circuit (10A) outputs an operating current having a predetermined current value. A plurality of current storage circuits (30A) are provided in accordance with the respective output terminals, sequentially fetch and hold the operating current and simultaneously output the drive current based on the operating current to the respective output terminals. The operating current has a current value according to an input signal. The current storage circuit (30A) includes a voltage component holding section which fetches the operating current outputted from the current generation circuit and holds a voltage component corresponding to a current value of the operating current.

WO 2004/003877 A2

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.