

(51) International Patent Classification:
F42C 9/16 (2006.01)(21) International Application Number:
PCT/IB2009/050571(22) International Filing Date:
12 February 2009 (12.02.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
189692 21 February 2008 (21.02.2008) IL(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US PCT/IL2007/001028 (CIP)
Filed on 16 August 2007 (16.08.2007)(71) Applicant (for all designated States except US):
RAFAEL ADVANCED DEFENSE SYSTEMS LTD.
[IL/IL]; P.O. Box 2250, 31021 Haifa (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BRILL, Yariv**
[IL/IL]; 8 Golda Meir, 34982 Haifa (IL). **NURIEL, Ohad**
Hanan [IL/IL]; 21 Hativat Hanahal Street, Hadera (IL).(74) Agent: **DR. MARK FRIEDMAN LTD.**; Moshe Aviv
Tower 54th Floor, 7 Jabotinsky Street, 52520 Ramat Gan
(IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(88) Date of publication of the international search report:
23 December 2009

(54) Title: GUIDED WEAPON WITH IN-FLIGHT-SWITCHABLE MULTIPLE FUZE MODES

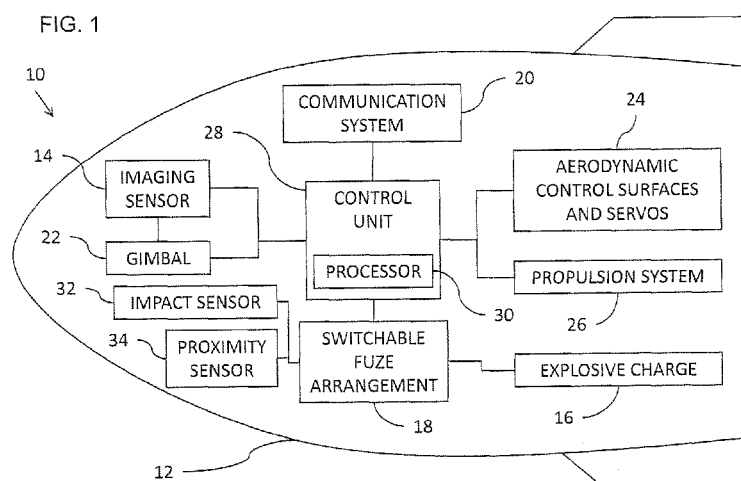

(57) **Abstract:** A method for operating a guided munition with a switchable fuze arrangement includes launching the guided munition towards a target. During flight of the guided munition, images are provided to a remote operator, who supplies a switching input. Responsive to said switching input, the fuze arrangement is switched to either of at least two of the following states: a delayed detonation state in which detonation of the explosive charge is delayed by a time delay after impact of the guided munition, an impact detonation state in which detonation of the explosive charge occurs on impact of the guided munition, a proximity detonation state in which detonation of the explosive charge is triggered by a proximity sensing arrangement, and a disabled state in which the guided munition functions as a guided kinetic shell without detonation of the explosive charge.