



(51) International Patent Classification:

H04N 19/34 (2014.01) *H04N 19/70* (2014.01)
H04N 19/29 (2014.01) *H04N 19/103* (2014.01)

(21) International Application Number:

PCT/FI2013/051216

(22) International Filing Date:

31 December 2013 (31.12.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/748,938 4 January 2013 (04.01.2013) US

(71) Applicant: **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FI-02150 Espoo (FI).

(72) Inventors: **HANNUKSELA, Miska**; Rusthollinrinne 2, FI-33610 Tampere (FI). **UGUR, Kemal**; Lapintie 6 D 25, FI-33100 Tampere (FI).

(74) Agents: **NOKIA CORPORATION** et al.; IPR Department, Virpi Tognetty, Keilalahdentie 4, FI-02150 Espoo (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: AN APPARATUS, A METHOD AND A COMPUTER PROGRAM FOR VIDEO CODING AND DECODING

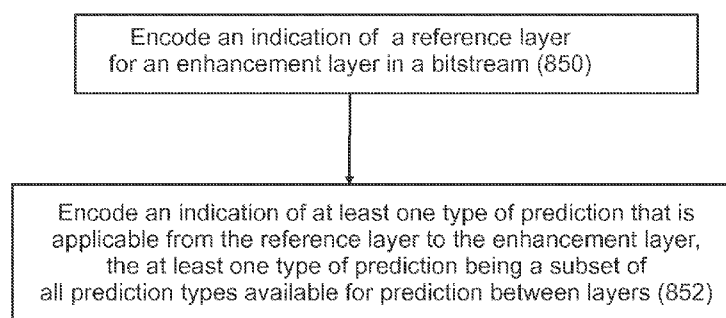


Fig. 8

(57) Abstract: A method comprising encoding a bitstream comprising a base layer, a first enhancement layer and a second enhancement layer; encoding an indication of both the base layer and the first enhancement layer used for prediction for the second enhancement layer in the bitstream; encoding, in the bitstream, an indication of a first set of prediction types that is applicable from the base layer to the second enhancement layer, wherein the first set of prediction types is a subset of all prediction types available for prediction between layers, and encoding, in the bitstream, an indication of a second set of prediction types that is applicable from the base layer or the first enhancement layer to the second enhancement layer, wherein the second set of prediction types is a subset of all prediction types available for prediction between layers.

